


Technical Specification

Product Code: CMA840

Description: 13A 2 Gang Double Pole Switched Socket Outlet With

Outboard Rockers & Neons

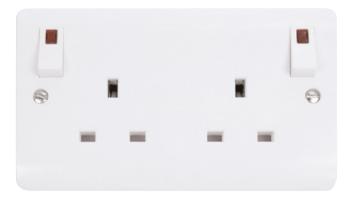



General Information

Dimensions 146mm (W) x 86mm (H) x 9.5mm (D)

Material Composition Front Plate & Rocker Switch: Urea

Rear Housing: Urea Neon Lens: Polycarbonate

Terminals: Brass

Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass

Earth Strap: Mild Steel

250V~ 50Hz Maximum Voltage **Fixing Centres** 120.6mm Terminal Size 5mmø **Terminal Torque** 2.5Nm

Terminal Capacity 3 x 2.5mm² or 2 x 4mm²

Double Pole Yes Twin Earth Terminals Neon Indicator

Back Box Depth 25mm Minimum Temperature Rating -5°C to +40°C Warranty 20 Years

> **Standards** BS 1363-2: 2016 +A1: 2018

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products have been independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

