

Floor Standing Enclosures  
Steel Range | Mild Steel  
Combinable, double door | MCD

IP 55 | TYPE 12, 13 | IK 10



- Material:**  
Frame: 1.5 mm painted steel.  
Doors: 2 mm painted steel.  
Rear, roof and side panels: 1.5 mm painted steel.  
Mounting plate: 3 mm galvanized steel.  
Bottom plates: 1 mm galvanized steel.
- Frame:**  
Seam welded reversed open profiles with 25 mm hole pattern, according to DIN 43660. Including integrated external hole pattern.
- Doors:**  
Mounted with four hinges. Including door frame with 25 mm hole pattern. Doors cannot be reversed. Separate doors to be ordered for left hand door locking.
- Rear panel:**  
Fitted by M6 torx screws. Standard facilities for rear doors mounting. Split rear panels in 1600 mm wide enclosures.
- Side panels:**  
Supplied as an accessory.
- Roof panel:**  
Removable.
- Lock:**  
Espagnolette 4-point locking system in the main door and 2-point locking system in the slave door. Standard double-bit lock with 3 mm insert. Standard inserts, cylinders, lift handles and T-handles are available as accessories.
- Bottom plates:**  
Consists of three or four (D>600) pieces.
- Mounting plate:**  
Double folded and slides into position. Adjustable in depth by steps of 25 mm, with the MPD02 accessory. Supplied, attached on the outside of the enclosure packaging.
- Earthing:**  
All panels are earthed through their fittings and equipped with a separate earthing stud.
- Finish:**  
RAL 7035 structured powder coating.
- Protection:**  
Complies with IP 55 | TYPE 12, 13 | IK 10.
- Mounting requirements:**  
Standard delivery ready for combined installation. For stand-alone installation add side panels.
- Delivery:**  
Frame with fitted doors, rear panel, roof panel, bottom plates, mounting plate and door frame (not included for PER5 version). For enclosures 2200 mm height, delivery includes two CMB profiles mounted in depth. Delivery also includes earthing bolts. Delivered on a pallet which is identical to the width of the enclosure to allow baying without removal. Packing material is recyclable.






IP 55 | TYPE 12, 13 | IK 10


With mounting plate

| Enclosure dimensions |      |     | Mounting plate dimensions |      | Usable depth | Item no.   |
|----------------------|------|-----|---------------------------|------|--------------|------------|
| H                    | W    | D   | h                         | w    | d            |            |
| 1800                 | 800  | 500 | 1694                      | 694  | 459          | MCD18085R5 |
| 1800                 | 1000 | 400 | 1694                      | 894  | 359          | MCD18104R5 |
| 1800                 | 1000 | 500 | 1694                      | 894  | 459          | MCD18105R5 |
| 1800                 | 1200 | 400 | 1694                      | 1094 | 359          | MCD18124R5 |
| 1800                 | 1200 | 500 | 1694                      | 1094 | 459          | MCD18125R5 |
| 1800                 | 1200 | 600 | 1694                      | 1094 | 559          | MCD18126R5 |
| 1800                 | 1600 | 400 | 1694                      | 1494 | 359          | MCD18164R5 |
| 2000                 | 800  | 500 | 1894                      | 694  | 459          | MCD20085R5 |
| 2000                 | 1000 | 400 | 1894                      | 894  | 359          | MCD20104R5 |
| 2000                 | 1000 | 500 | 1894                      | 894  | 459          | MCD20105R5 |
| 2000                 | 1000 | 600 | 1894                      | 894  | 559          | MCD20106R5 |
| 2000                 | 1000 | 800 | 1894                      | 894  | 759          | MCD20108R5 |
| 2000                 | 1200 | 400 | 1894                      | 1094 | 359          | MCD20124R5 |
| 2000                 | 1200 | 500 | 1894                      | 1094 | 459          | MCD20125R5 |
| 2000                 | 1200 | 600 | 1894                      | 1094 | 559          | MCD20126R5 |
| 2000                 | 1200 | 800 | 1894                      | 1094 | 759          | MCD20128R5 |
| 2000                 | 1600 | 400 | 1894                      | 1494 | 359          | MCD20164R5 |
| 2000                 | 1600 | 500 | 1894                      | 1494 | 459          | MCD20165R5 |
| 2000                 | 1600 | 600 | 1894                      | 1494 | 559          | MCD20166R5 |
| 2200                 | 1000 | 600 | 2094                      | 894  | 559          | MCD22106R5 |
| 2200                 | 1200 | 600 | 2094                      | 1094 | 559          | MCD22126R5 |

Without mounting plate

| Enclosure dimensions |      |     | Item no.     |
|----------------------|------|-----|--------------|
| H                    | W    | D   |              |
| 1800                 | 800  | 500 | MCD18085PER5 |
| 1800                 | 1000 | 400 | MCD18104PER5 |
| 1800                 | 1000 | 500 | MCD18105PER5 |
| 1800                 | 1200 | 400 | MCD18124PER5 |
| 1800                 | 1200 | 500 | MCD18125PER5 |
| 1800                 | 1200 | 600 | MCD18126PER5 |
| 1800                 | 1600 | 400 | MCD18164PER5 |
| 2000                 | 800  | 500 | MCD20085PER5 |
| 2000                 | 1000 | 400 | MCD20104PER5 |
| 2000                 | 1000 | 500 | MCD20105PER5 |
| 2000                 | 1000 | 600 | MCD20106PER5 |
| 2000                 | 1000 | 800 | MCD20108PER5 |
| 2000                 | 1200 | 400 | MCD20124PER5 |
| 2000                 | 1200 | 500 | MCD20125PER5 |
| 2000                 | 1200 | 600 | MCD20126PER5 |
| 2000                 | 1200 | 800 | MCD20128PER5 |
| 2000                 | 1600 | 400 | MCD20164PER5 |
| 2000                 | 1600 | 500 | MCD20165PER5 |
| 2000                 | 1600 | 600 | MCD20166PER5 |
| 2200                 | 1000 | 600 | MCD22106PER5 |
| 2200                 | 1200 | 600 | MCD22126PER5 |

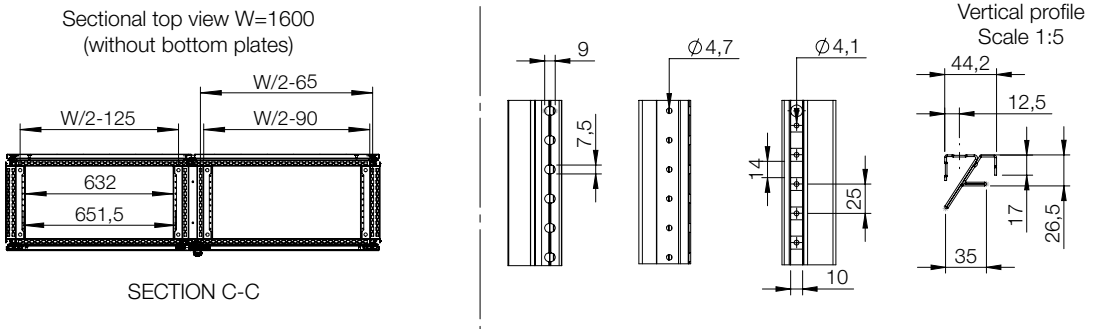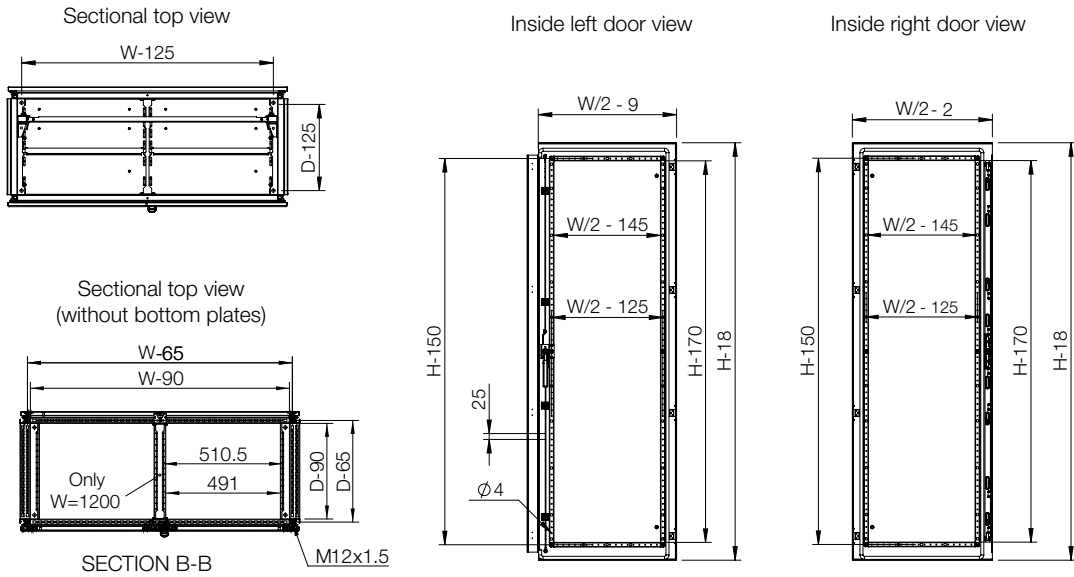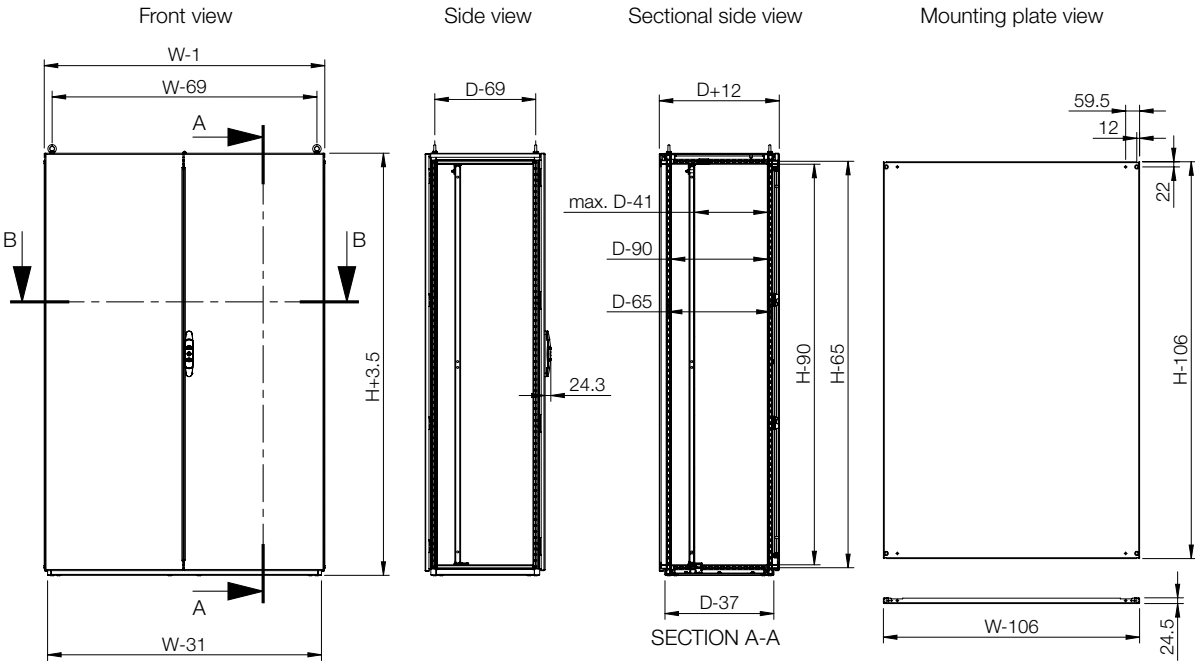

|            |      |      |     |  |  |  |
|------------|------|------|-----|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Enclosure  |      |      |     | Mounting                                                                          |                                                                                    |                                                                                     |
|            | H    | W    | D   | Mounting plate                                                                    | Wide mounting plate *                                                              | Transversal sliding profiles                                                        |
| MCD18085R5 | 1800 | 800  | 500 | MP1808                                                                            | MPW1808                                                                            | MTS800                                                                              |
| MCD18104R5 | 1800 | 1000 | 400 | MP1810                                                                            | MPW1810                                                                            | MTS1000                                                                             |
| MCD18105R5 | 1800 | 1000 | 500 | MP1810                                                                            | MPW1810                                                                            | MTS1000                                                                             |
| MCD18124R5 | 1800 | 1200 | 400 | MP1812                                                                            | MPW1812                                                                            | MTS1200                                                                             |
| MCD18125R5 | 1800 | 1200 | 500 | MP1812                                                                            | MPW1812                                                                            | MTS1200                                                                             |
| MCD18126R5 | 1800 | 1200 | 600 | MP1812                                                                            | MPW1812                                                                            | MTS1200                                                                             |
| MCD18164R5 | 1800 | 1600 | 400 | MP1816                                                                            | MPW1816                                                                            | MTS1600                                                                             |
| MCD20085R5 | 2000 | 800  | 500 | MP2008                                                                            | MPW2008                                                                            | MTS800                                                                              |
| MCD20104R5 | 2000 | 1000 | 400 | MP2010                                                                            | MPW2010                                                                            | MTS1000                                                                             |
| MCD20105R5 | 2000 | 1000 | 500 | MP2010                                                                            | MPW2010                                                                            | MTS1000                                                                             |
| MCD20106R5 | 2000 | 1000 | 600 | MP2010                                                                            | MPW2010                                                                            | MTS1000                                                                             |
| MCD20108R5 | 2000 | 1000 | 800 | MP2010                                                                            | MPW2010                                                                            | MTS1000                                                                             |
| MCD20124R5 | 2000 | 1200 | 400 | MP2012                                                                            | MPW2012                                                                            | MTS1200                                                                             |
| MCD20125R5 | 2000 | 1200 | 500 | MP2012                                                                            | MPW2012                                                                            | MTS1200                                                                             |
| MCD20126R5 | 2000 | 1200 | 600 | MP2012                                                                            | MPW2012                                                                            | MTS1200                                                                             |
| MCD20128R5 | 2000 | 1200 | 800 | MP2012                                                                            | MPW2012                                                                            | MTS1200                                                                             |
| MCD20164R5 | 2000 | 1600 | 400 | MP2016                                                                            | MPW2016                                                                            | MTS1600                                                                             |
| MCD20165R5 | 2000 | 1600 | 500 | MP2016                                                                            | MPW2016                                                                            | MTS1600                                                                             |
| MCD20166R5 | 2000 | 1600 | 600 | MP2016                                                                            | MPW2016                                                                            | MTS1600                                                                             |
| MCD22106R5 | 2200 | 1000 | 600 | MP2210                                                                            | -                                                                                  | MTS1000                                                                             |
| MCD22126R5 | 2200 | 1200 | 600 | MP2212                                                                            | -                                                                                  | MTS1200                                                                             |

\* MTS is required.

|            |      |      |     |  |  |  |  |  |  |
|------------|------|------|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Enclosure  |      |      |     | Mounting                                                                            |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|            | H    | W    | D   | Mounting profile, in H                                                              | Mounting profile, in W                                                              | Mounting profile, in D                                                              | Click in profile, in W                                                               | Click in profile, in D                                                                | Side mounting bar                                                                     |
| MCD18085R5 | 1800 | 800  | 500 | CLPF1800                                                                            | CLPF800                                                                             | CLPF500                                                                             | CLPK800                                                                              | CLPK500                                                                               | CMB502                                                                                |
| MCD18104R5 | 1800 | 1000 | 400 | CLPF1800                                                                            | CLPF1000                                                                            | CLPF400                                                                             | CLPK1000                                                                             | CLPK400                                                                               | CMB402                                                                                |
| MCD18105R5 | 1800 | 1000 | 500 | CLPF1800                                                                            | CLPF1000                                                                            | CLPF500                                                                             | CLPK1000                                                                             | CLPK500                                                                               | CMB502                                                                                |
| MCD18124R5 | 1800 | 1200 | 400 | CLPF1800                                                                            | CLPF1200                                                                            | CLPF400                                                                             | CLPK1200                                                                             | CLPK400                                                                               | CMB402                                                                                |
| MCD18125R5 | 1800 | 1200 | 500 | CLPF1800                                                                            | CLPF1200                                                                            | CLPF500                                                                             | CLPK1200                                                                             | CLPK500                                                                               | CMB502                                                                                |
| MCD18126R5 | 1800 | 1200 | 600 | CLPF1800                                                                            | CLPF1200                                                                            | CLPF600                                                                             | CLPK1200                                                                             | CLPK600                                                                               | CMB602                                                                                |
| MCD18164R5 | 1800 | 1600 | 400 | CLPF1800                                                                            | CLPF1600                                                                            | CLPF400                                                                             | -                                                                                    | CLPK400                                                                               | CMB402                                                                                |
| MCD20085R5 | 2000 | 800  | 500 | CLPF2000                                                                            | CLPF800                                                                             | CLPF500                                                                             | CLPK800                                                                              | CLPK500                                                                               | CMB502                                                                                |
| MCD20104R5 | 2000 | 1000 | 400 | CLPF2000                                                                            | CLPF1000                                                                            | CLPF400                                                                             | CLPK1000                                                                             | CLPK400                                                                               | CMB402                                                                                |
| MCD20105R5 | 2000 | 1000 | 500 | CLPF2000                                                                            | CLPF1000                                                                            | CLPF500                                                                             | CLPK1000                                                                             | CLPK500                                                                               | CMB502                                                                                |
| MCD20106R5 | 2000 | 1000 | 600 | CLPF2000                                                                            | CLPF1000                                                                            | CLPF600                                                                             | CLPK1000                                                                             | CLPK600                                                                               | CMB602                                                                                |
| MCD20108R5 | 2000 | 1000 | 800 | CLPF2000                                                                            | CLPF1000                                                                            | CLPF800                                                                             | CLPK1000                                                                             | CLPK800                                                                               | CMB802                                                                                |
| MCD20124R5 | 2000 | 1200 | 400 | CLPF2000                                                                            | CLPF1200                                                                            | CLPF400                                                                             | CLPK1200                                                                             | CLPK400                                                                               | CMB402                                                                                |
| MCD20125R5 | 2000 | 1200 | 500 | CLPF2000                                                                            | CLPF1200                                                                            | CLPF500                                                                             | CLPK1200                                                                             | CLPK500                                                                               | CMB502                                                                                |
| MCD20126R5 | 2000 | 1200 | 600 | CLPF2000                                                                            | CLPF1200                                                                            | CLPF600                                                                             | CLPK1200                                                                             | CLPK600                                                                               | CMB602                                                                                |
| MCD20128R5 | 2000 | 1200 | 800 | CLPF2000                                                                            | CLPF1200                                                                            | CLPF800                                                                             | CLPK1200                                                                             | CLPK800                                                                               | CMB802                                                                                |
| MCD20164R5 | 2000 | 1600 | 400 | CLPF2000                                                                            | CLPF1600                                                                            | CLPF400                                                                             | -                                                                                    | CLPK400                                                                               | CMB402                                                                                |
| MCD20165R5 | 2000 | 1600 | 500 | CLPF2000                                                                            | CLPF1600                                                                            | CLPF500                                                                             | -                                                                                    | CLPK500                                                                               | CMB502                                                                                |
| MCD20166R5 | 2000 | 1600 | 600 | CLPF2000                                                                            | CLPF1600                                                                            | CLPF600                                                                             | -                                                                                    | CLPK600                                                                               | CMB602                                                                                |
| MCD22106R5 | 2200 | 1000 | 600 | CLPF2200                                                                            | CLPF1000                                                                            | CLPF600                                                                             | CLPK1000                                                                             | CLPK600                                                                               | CMB602                                                                                |
| MCD22126R5 | 2200 | 1200 | 600 | CLPF2200                                                                            | CLPF1200                                                                            | CLPF600                                                                             | CLPK1200                                                                             | CLPK600                                                                               | CMB602                                                                                |

|            |      |      |     |  |  |  |  |  |
|------------|------|------|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Enclosure  |      |      |     | Mounting                                                                            |                                                                                     |                                                                                     | Doors                                                                               |                                                                                     |
|            | H    | W    | D   | Depth dividing bar                                                                  | Vertical dividing bar                                                               | Fixing brackets                                                                     | Plain door, left *                                                                  | Plain door, right *                                                                 |
| MCD18085R5 | 1800 | 800  | 500 | VBD500                                                                              | VB1800                                                                              | VBK04                                                                               | DN1804LR5                                                                           | DN1804RR5                                                                           |
| MCD18104R5 | 1800 | 1000 | 400 | VBD400                                                                              | VB1800                                                                              | VBK04                                                                               | DN1805LR5                                                                           | DN1805RR5                                                                           |
| MCD18105R5 | 1800 | 1000 | 500 | VBD500                                                                              | VB1800                                                                              | VBK04                                                                               | DN1805LR5                                                                           | DN1805RR5                                                                           |
| MCD18124R5 | 1800 | 1200 | 400 | VBD400                                                                              | VB1800                                                                              | VBK1200                                                                             | DN1806LR5                                                                           | DN1806RR5                                                                           |
| MCD18125R5 | 1800 | 1200 | 500 | VBD500                                                                              | VB1800                                                                              | VBK1200                                                                             | DN1806LR5                                                                           | DN1806RR5                                                                           |
| MCD18126R5 | 1800 | 1200 | 600 | VBD600                                                                              | VB1800                                                                              | VBK1200                                                                             | DN1806LR5                                                                           | DN1806RR5                                                                           |
| MCD18164R5 | 1800 | 1600 | 400 | VBD400                                                                              | VB1800                                                                              | VBK1600                                                                             | DN1808LR5                                                                           | DN1808RR5                                                                           |
| MCD20085R5 | 2000 | 800  | 500 | VBD500                                                                              | VB2000                                                                              | VBK04                                                                               | DN2004LR5                                                                           | DN2004RR5                                                                           |
| MCD20104R5 | 2000 | 1000 | 400 | VBD400                                                                              | VB2000                                                                              | VBK04                                                                               | DN2005LR5                                                                           | DN2005RR5                                                                           |
| MCD20105R5 | 2000 | 1000 | 500 | VBD500                                                                              | VB2000                                                                              | VBK04                                                                               | DN2005LR5                                                                           | DN2005RR5                                                                           |
| MCD20106R5 | 2000 | 1000 | 600 | VBD600                                                                              | VB2000                                                                              | VBK04                                                                               | DN2005LR5                                                                           | DN2005RR5                                                                           |
| MCD20108R5 | 2000 | 1000 | 800 | VBD800                                                                              | VB2000                                                                              | VBK04                                                                               | DN2005LR5                                                                           | DN2005RR5                                                                           |
| MCD20124R5 | 2000 | 1200 | 400 | VBD400                                                                              | VB2000                                                                              | VBK1200                                                                             | DN2006LR5                                                                           | DN2006RR5                                                                           |
| MCD20125R5 | 2000 | 1200 | 500 | VBD500                                                                              | VB2000                                                                              | VBK1200                                                                             | DN2006LR5                                                                           | DN2006RR5                                                                           |
| MCD20126R5 | 2000 | 1200 | 600 | VBD600                                                                              | VB2000                                                                              | VBK1200                                                                             | DN2006LR5                                                                           | DN2006RR5                                                                           |
| MCD20128R5 | 2000 | 1200 | 800 | VBD800                                                                              | VB2000                                                                              | VBK1200                                                                             | DN2006LR5                                                                           | DN2006RR5                                                                           |
| MCD20164R5 | 2000 | 1600 | 400 | VBD400                                                                              | VB2000                                                                              | VBK1600                                                                             | DN2008LR5                                                                           | DN2008RR5                                                                           |
| MCD20165R5 | 2000 | 1600 | 500 | VBD500                                                                              | VB2000                                                                              | VBK1600                                                                             | DN2008LR5                                                                           | DN2008RR5                                                                           |
| MCD20166R5 | 2000 | 1600 | 600 | VBD600                                                                              | VB2000                                                                              | VBK1600                                                                             | DN2008LR5                                                                           | DN2008RR5                                                                           |
| MCD22106R5 | 2200 | 1000 | 600 | VBD600                                                                              | VB2200                                                                              | VBK04                                                                               | DN2205LR5                                                                           | DN2205RR5                                                                           |
| MCD22126R5 | 2200 | 1200 | 600 | VBD600                                                                              | VB2200                                                                              | VBK1200                                                                             | DN2206LR5                                                                           | DN2206RR5                                                                           |

\* DNMK is required for additional door.

|            |      |      |     |  |  |  |  |  |  |
|------------|------|------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Enclosure  |      |      |     | Fixing                                                                                |                                                                                       |                                                                                       |                                                                                       |                                                                                       | Thermal                                                                               |
|            | H    | W    | D   | Front/rear plinths (100 mm height)                                                    | Plinth side panels (100 mm height)                                                    | Front/rear plinths (200 mm height)                                                    | Plinth side panels (200 mm height)                                                    | Ventilated front/rear plinths (100 mm height)                                         | Ventilated roof                                                                       |
| MCD18085R5 | 1800 | 800  | 500 | PF1080                                                                                | PS1050                                                                                | PF2080                                                                                | PS2050                                                                                | PV1080                                                                                | CVR0805R5                                                                             |
| MCD18104R5 | 1800 | 1000 | 400 | PF1100                                                                                | PS1040                                                                                | PF2100                                                                                | PS2040                                                                                | PV1100                                                                                | CVR1004R5                                                                             |
| MCD18105R5 | 1800 | 1000 | 500 | PF1100                                                                                | PS1050                                                                                | PF2100                                                                                | PS2050                                                                                | PV1100                                                                                | CVR1005R5                                                                             |
| MCD18124R5 | 1800 | 1200 | 400 | PF1120                                                                                | PS1040                                                                                | PF2120                                                                                | PS2040                                                                                | PV1120                                                                                | CVR1204R5                                                                             |
| MCD18125R5 | 1800 | 1200 | 500 | PF1120                                                                                | PS1050                                                                                | PF2120                                                                                | PS2050                                                                                | PV1120                                                                                | CVR1205R5                                                                             |
| MCD18126R5 | 1800 | 1200 | 600 | PF1120                                                                                | PS1060                                                                                | PF2120                                                                                | PS2060                                                                                | PV1120                                                                                | CVR1206R5                                                                             |
| MCD18164R5 | 1800 | 1600 | 400 | 2x PF1080                                                                             | PS1040                                                                                | 2x PF2080                                                                             | PS2040                                                                                | 2x PV1080                                                                             | CVR1604R5                                                                             |
| MCD20085R5 | 2000 | 800  | 500 | PF1080                                                                                | PS1050                                                                                | PF2080                                                                                | PS2050                                                                                | PV1080                                                                                | CVR0805R5                                                                             |
| MCD20104R5 | 2000 | 1000 | 400 | PF1100                                                                                | PS1040                                                                                | PF2100                                                                                | PS2040                                                                                | PV1100                                                                                | CVR1004R5                                                                             |
| MCD20105R5 | 2000 | 1000 | 500 | PF1100                                                                                | PS1050                                                                                | PF2100                                                                                | PS2050                                                                                | PV1100                                                                                | CVR1005R5                                                                             |
| MCD20106R5 | 2000 | 1000 | 600 | PF1100                                                                                | PS1060                                                                                | PF2100                                                                                | PS2060                                                                                | PV1100                                                                                | CVR1006R5                                                                             |
| MCD20108R5 | 2000 | 1000 | 800 | PF1100                                                                                | PS1080                                                                                | PF2100                                                                                | PS2080                                                                                | PV1100                                                                                | CVR1008R5                                                                             |
| MCD20124R5 | 2000 | 1200 | 400 | PF1120                                                                                | PS1040                                                                                | PF2120                                                                                | PS2040                                                                                | PV1120                                                                                | CVR1204R5                                                                             |
| MCD20125R5 | 2000 | 1200 | 500 | PF1120                                                                                | PS1050                                                                                | PF2120                                                                                | PS2050                                                                                | PV1120                                                                                | CVR1205R5                                                                             |
| MCD20126R5 | 2000 | 1200 | 600 | PF1120                                                                                | PS1060                                                                                | PF2120                                                                                | PS2060                                                                                | PV1120                                                                                | CVR1206R5                                                                             |
| MCD20128R5 | 2000 | 1200 | 800 | PF1120                                                                                | PS1080                                                                                | PF2120                                                                                | PS2080                                                                                | PV1120                                                                                | CVR1208R5                                                                             |
| MCD20164R5 | 2000 | 1600 | 400 | 2x PF1080                                                                             | PS1040                                                                                | 2x PF2080                                                                             | PS2040                                                                                | 2x PV1080                                                                             | CVR1604R5                                                                             |
| MCD20165R5 | 2000 | 1600 | 500 | 2x PF1080                                                                             | PS1050                                                                                | 2x PF2080                                                                             | PS2050                                                                                | 2x PV1080                                                                             | CVR1605R5                                                                             |
| MCD20166R5 | 2000 | 1600 | 600 | 2x PF1080                                                                             | PS1060                                                                                | 2x PF2080                                                                             | PS2060                                                                                | 2x PV1080                                                                             | CVR1606R5                                                                             |
| MCD22106R5 | 2200 | 1000 | 600 | PF1100                                                                                | PS1060                                                                                | PF2100                                                                                | PS2060                                                                                | PV1100                                                                                | CVR1006R5                                                                             |
| MCD22126R5 | 2200 | 1200 | 600 | PF1120                                                                                | PS1060                                                                                | PF2120                                                                                | PS2060                                                                                | PV1120                                                                                | CVR1206R5                                                                             |

|            |      |      |     |  |  |  |  |  |
|------------|------|------|-----|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Enclosure  |      |      |     | Baying                                                                            |                                                                                   | Cable                                                                             |                                                                                    |                                                                                     |
|            | H    | W    | D   | Side panels                                                                       | Segregation plate *                                                               | Cable fixing bar<br>(mounted below<br>bottom plates)                              | Cable fixing bar<br>(mounted above<br>bottom plates)                               | Ventilated<br>bottom plates                                                         |
| MCD18085R5 | 1800 | 800  | 500 | SPM1805R5                                                                         | SPD1805                                                                           | CABP800                                                                           | CAB800                                                                             | CVB0805                                                                             |
| MCD18104R5 | 1800 | 1000 | 400 | SPM1804R5                                                                         | SPD1804                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1004                                                                             |
| MCD18105R5 | 1800 | 1000 | 500 | SPM1805R5                                                                         | SPD1805                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1005                                                                             |
| MCD18124R5 | 1800 | 1200 | 400 | SPM1804R5                                                                         | SPD1804                                                                           | CABP1200                                                                          | CAB1200                                                                            | -                                                                                   |
| MCD18125R5 | 1800 | 1200 | 500 | SPM1805R5                                                                         | SPD1805                                                                           | CABP1200                                                                          | CAB1200                                                                            | -                                                                                   |
| MCD18126R5 | 1800 | 1200 | 600 | SPM1806R5                                                                         | SPD1806                                                                           | CABP1200                                                                          | CAB1200                                                                            | CVB1206                                                                             |
| MCD18164R5 | 1800 | 1600 | 400 | SPM1804R5                                                                         | SPD1804                                                                           | CABP800                                                                           | CAB800                                                                             | 2x CVB0804                                                                          |
| MCD20085R5 | 2000 | 800  | 500 | SPM2005R5                                                                         | SPD2005                                                                           | CABP800                                                                           | CAB800                                                                             | CVB0805                                                                             |
| MCD20104R5 | 2000 | 1000 | 400 | SPM2004R5                                                                         | SPD2004                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1004                                                                             |
| MCD20105R5 | 2000 | 1000 | 500 | SPM2005R5                                                                         | SPD2005                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1005                                                                             |
| MCD20106R5 | 2000 | 1000 | 600 | SPM2006R5                                                                         | SPD2006                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1006                                                                             |
| MCD20108R5 | 2000 | 1000 | 800 | SPM2008R5                                                                         | SPD2008                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1008                                                                             |
| MCD20124R5 | 2000 | 1200 | 400 | SPM2004R5                                                                         | SPD2004                                                                           | CABP1200                                                                          | CAB1200                                                                            | -                                                                                   |
| MCD20125R5 | 2000 | 1200 | 500 | SPM2005R5                                                                         | SPD2005                                                                           | CABP1200                                                                          | CAB1200                                                                            | -                                                                                   |
| MCD20126R5 | 2000 | 1200 | 600 | SPM2006R5                                                                         | SPD2006                                                                           | CABP1200                                                                          | CAB1200                                                                            | CVB1206                                                                             |
| MCD20128R5 | 2000 | 1200 | 800 | SPM2008R5                                                                         | SPD2008                                                                           | CABP1200                                                                          | CAB1200                                                                            | CVB1208                                                                             |
| MCD20164R5 | 2000 | 1600 | 400 | SPM2004R5                                                                         | SPD2004                                                                           | CABP800                                                                           | CAB800                                                                             | 2x CVB0804                                                                          |
| MCD20165R5 | 2000 | 1600 | 500 | SPM2005R5                                                                         | SPD2005                                                                           | CABP800                                                                           | CAB800                                                                             | 2x CVB0805                                                                          |
| MCD20166R5 | 2000 | 1600 | 600 | SPM2006R5                                                                         | SPD2006                                                                           | CABP800                                                                           | CAB800                                                                             | CVB0806                                                                             |
| MCD22106R5 | 2200 | 1000 | 600 | SPM2206R5                                                                         | SPD2206                                                                           | CABP1000                                                                          | CAB1000                                                                            | CVB1006                                                                             |
| MCD22126R5 | 2200 | 1200 | 600 | SPM2206R5                                                                         | SPD2206                                                                           | CABP1200                                                                          | CAB1200                                                                            | CVB1206                                                                             |

\* CCJ is required.

