

AANSLUITBUSBAR, MESSING, 7 AANSLUITINGEN

CATALOG NUMBER

CB7X16



nVent ERIFLEX Connecting, Earthing and Neutral Busbars are used to connect several earthing conductors within a panel and can be used in a variety of different applications including switchgear and control equipment, electrical equipment, for wind and solar power generation and in data centers. This Universal Connecting Bar can be used as a 450A current rating IEC for power distribution.

CERTIFICATIONS



FEATURES

Easy to wire with a hexagonal key

Design allows for visual inspection of conductor and confirmation of connection

For use with punched or threaded copper busbar

High fill ratio allows output connection with or without terminal

Snelle en eenvoudige installatie

RoHS compliant

PRODUCTKENMERKEN

Article Number: 553150

Material: Messing

Max Current Rating: 450A

Number of Tunnel Connections: 7

Conductor Size, IEC: (7) 1,5 - 16 mm² Stranded

Ferrule Conductor Size, IEC: (7) 1,5 - 16 mm²

Conductor Size, UL: (7) #10 - #6 Solid; (7) #8 - #4 Stranded

Depth (D): 12,5 mm


Height (H): 31 mm

Width (W): 68 mm

A: 9 mm
B: 4 mm
Torque (TQ): 3,5 N·m
Unit Weight: 0,08 kg

Thread Size TS	C
M5	18 mm
M6	17.5 mm; 25 mm
M8	20 mm; 25 mm
M10	25 mm

DIAGRAMS

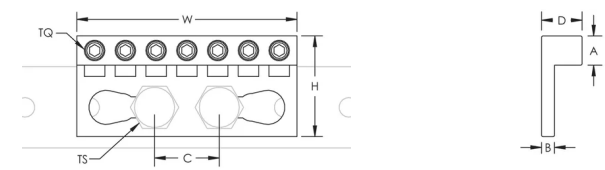

WAARSCHUWING

Producten van nVent moeten worden geïnstalleerd en gebruikt op de manier zoals is aangegeven in de nVent productinformatiebladen en trainingsmaterialen. U kunt de productinformatiebladen downloaden van www.nvent.com of opvragen bij uw nVent-klantenservice. Door onjuist installeren, verkeerd gebruik, verkeerde toepassing of enige andere handeling in strijd met de instructies en waarschuwingen van nVent kan het product mogelijk niet correct werken, ernstig of fataal letsel en materiële schade veroorzaken en/of uw garantie ongeldig maken.

Noord-Amerika +1.800.753.9221 Option 1 – Customer Care Option 2 – Technical Support	Europa Netherlands: +31 800-0200135 France: +33 800 901 793	Europa Germany: 800 1890272 Other Countries: +31 13 5835404	APAC Shanghai: + 86 21 2412 1618/19 Sydney: +61 2 9751 8500
---	--	--	--