

PRODUCT DATASHEET

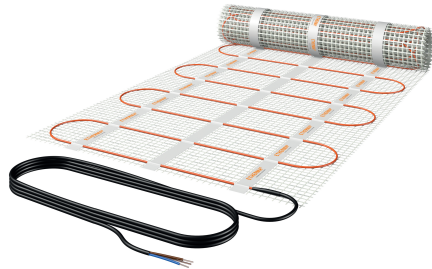
Type: 92-DS5-2240
Art. Nr.: 34224



9120105410311

Short description

Heating mat for thin bed, 11.2m², 50x2240cm, 1011W, 230V

**Product Description**

The DS mesh heating mat is a factory-made heating mat for temperature control of floors, heating rooms or insulating walls from the cold. Due to the 2.7 mm thin structure, the mesh heating mat enables a low floor height construction. The heating mat is self-adhesive and the dipole design guarantees easy installation in the tile adhesive bed - with a virtually magnetic field-free operation. Special processing guarantees 100% reliable, easy installation and high stability of the heating mat. Upon request, we are also happy to custom manufacture DS mesh heating mats with custom size, voltage, power and shape. Dipole heating conductor, low magnetic field, nominal temperature: up to 90°C, system design: according to VDE 0700, heating conductor thickness: 2.7 mm, protection rating: IP X7, grid: 12x12 mm, self-adhesive, CE marking, certification mark: VDE, protective measure: 30 mA RCD protection circuit, standard connection cable: 4 m, 2x1.0 mm² protective braiding.

ETIM characteristics

Model	Other	Connection voltage	230 23 Volt 0
With support mat	✓	Connected load	1011 1 Watt 011
Fixation thermal conductor	Glued	Power	90 Watt per square metre
Self-adhesive	✓	Heating conductor load	6.75 Watt per metre
Suitable for damp space	✓	Resistance	52 Ohm
Suitable as outdoor surface heating	✗	Number of cold conductors	1
Suitable as roof surface heating	✗	Length of cold conductors	4000 Millimetre
With controller	✗	Surface	11.2 Square metre
With room temperature controller	✗	Length	22400 Millimetre
With floor temperature sensor	✗	Width	500 Millimetre
		Thickness	2.7 Millimetre

Created on: 09/10/2024