



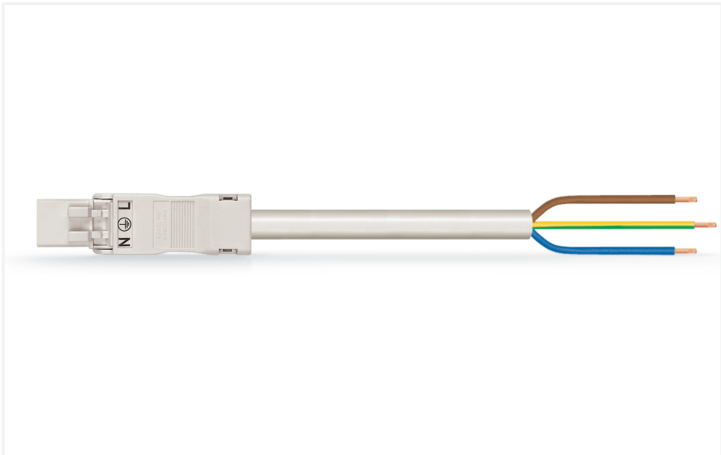

Color: white

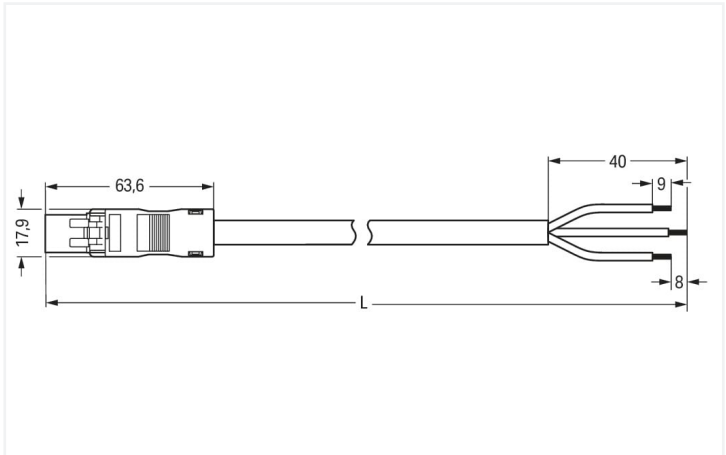

Dimensions in mm

Cable assembly *WINSTA*® MINI rated current 10 A

Use effective pluggable connections instead of laborious screw connections: With the *WINSTA*® MINI cable assembly with protection against mismatching. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to a huge variety of requirements in seconds. The coding options reduce installation errors, allowing fast, secure wiring of all components. Standard mains applications for almost any domain of use can be implemented with *WINSTA*® MINI pluggable installation connectors with A coding. *WINSTA*® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for example, since due to LED technology, these offer less and less space for the connection technology. According to the European CPR, the fire class of the cables used in construction is critical for the safety of buildings, too. For buildings with average safety requirements, cable assemblies with fire class E are suitable. Not using halogen additives in the manufacture of this cable assembly noticeably improves fire safety and minimises environmental pollution.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable is pre-assembled with a plug and a free end. The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also cut installation costs without compromising safety and quality: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- effective protection against mismatching
- compact design for conductors with a cross-section up to 1.5 mm²
- suitable for any application
- ready for immediate use
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage		250 V	-	-		
Rated surge voltage		4 kV	-	-		
Rated current		10 A	-	-		



Connection data			
Total number of potentials	3	Connection 1	
PE function	Preceding PE contact	Strip length	9 mm / 0.35 inches
Conductor preparation	ultrasonically tip-bonded	Pole number	3
		Wire cross-section	1 mm²
		Strip length (outer insulation)	40 mm
		Connection type	Plug - free end

Physical data		
Pin spacing		4.4 mm / 0.173 inches
Width		17.9 mm / 0.705 inches
Height		14 mm / 0.551 inches
Total length		3 m

Mechanical data		
Use		General mains applications
Coding		A
Variable coding		No
Marking		L ⊕ N
Potential marking		L ⊕ N
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection		when locked: > 80N
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles		200, without resistive load
Connection type		Plug - free end
Type of pre-assembled cable		Connecting cable
Cable type		H05Z1Z1-F 3G1
Protection type		IP20; IP40 when mated

Plug-in connection		
Mismating protection		Yes
Note on mismating protection		All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever		Can be retrofitted
Locking of plug-in connection		Locking lever
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Insulation material (main housing)		Polyamide (PA66)
Fire class per EN 50575		E _{ca}
Contact material		Copper or copper alloy; surface-treated
Contact Plating		Tin
Fire load		89.864 MJ
Connector color		white
Strain relief color		white



Material data	
Sheathed cable color	white
Printing color of sheathed cable	black
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	225.4 g
Copper weight of the pipe	0.029 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143397360
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
CCA KEMA KEUR		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7971
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123232
Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
891-8993/215-302			

Documentation

Bid Text			
891-8993/215-302	19.02.2019	xml 3.03 KB	↓
891-8993/215-302	26.11.2014	doc 25.00 KB	↓

CAD/CAE-Data

CAE data	
EPLAN Data Portal 891-8993/215-302	↓
WSCAD Universe 891-8993/215-302	↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)
Locking lever; for manual operation; black



[Item No.: 890-121](#)
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)
Protective cap; Type1; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)
Mounting carrier; 2- to 5-pole; for flying leads; black

[Item No.: 890-311](#)
Mounting carrier; 2- to 5-pole; for flying leads; white