




Color: ■ black

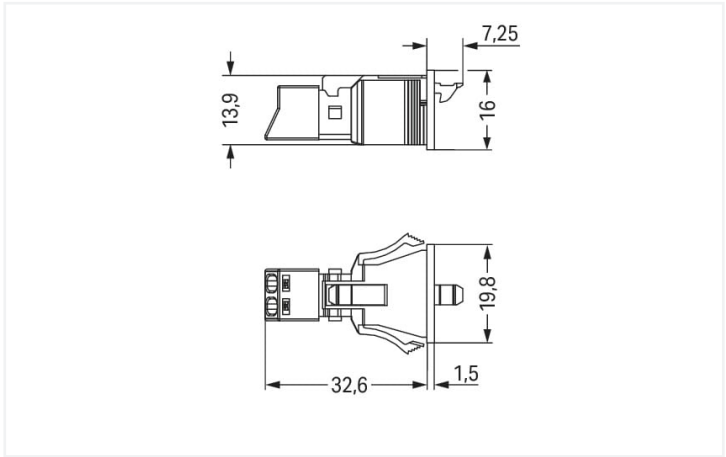

Dimensions in mm

Female connector/socket WINSTA® MINI 2-pole

The WINSTA® MINI female connector/socket with protection against mismatching is the pluggable solution for your use in control cabinets, on PCBs or for lighting connections. The pluggable installation connectors with spring pressure connection technology function entirely without screw connections. They allow flexible, error-free installation in a large number of possible uses. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector offers protection against contact with tools or wires if they are smaller than 1 mm in accordance with protection type IP40. The WINSTA® MINI pluggable installation connector with A coding in white or black is normally used for general mains applications in power distribution. Thanks to its particularly minimal dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very tight spaces, i.e., for connections when very little room is available.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MINI

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with locking lever from WAGO.

- protection against mismatching eliminates errors
- compact design for conductors with a cross-section up to 1.5 mm²
- for any mains application
- ready for immediate use
- convenient installation and commissioning

Notes	
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Electrical data						
Ratings per		IEC/EN 60664-1			Approvals per	
Overvoltage category		III	III	II	UL 1977	
Pollution degree		3	2	2	Rated voltage	
Nominal voltage		250 V	-	-	Rated current	
Rated surge voltage		4 kV	-	-		
Rated current		16 A	-	-		



General information	
Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket

Connection data																												
Clamping units	2	Connection 1 <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool Push-in</td></tr><tr><td>Nominal cross-section</td><td>1.5 mm² / 16 AWG</td></tr><tr><td>Solid conductor</td><td>0.25 ... 1.5 mm² / 22 ... 16 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>0.75 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Stranded conductor</td><td>0.25 ... 1 mm² / 22 ... 18 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.25 ... 1.5 mm² / 22 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 0.75 mm² / 22 ... 20 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 0.75 mm² / 22 ... 20 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>0.75 mm² / 20 AWG</td></tr><tr><td>Strip length</td><td>9 mm / 0.35 inches</td></tr><tr><td>Pole number</td><td>2</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0 °</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Operating tool Push-in	Nominal cross-section	1.5 mm² / 16 AWG	Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG	Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG	Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG	Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG	Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG	Strip length	9 mm / 0.35 inches	Pole number	2	Conductor entry direction to mating direction	0 °
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Operating tool Push-in																											
Nominal cross-section	1.5 mm² / 16 AWG																											
Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG																											
Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG																											
Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG																											
Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG																											
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG																											
Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG																											
Strip length	9 mm / 0.35 inches																											
Pole number	2																											
Conductor entry direction to mating direction	0 °																											
Total number of potentials	2																											

Physical data		
Pin spacing	4.4 mm / 0.173 inches	
Width	19.8 mm / 0.78 inches	
Height	16 mm / 0.63 inches	
Depth	39.85 mm / 1.569 inches	

Mechanical data		
Use	General mains applications	
Coding	A	
Variable coding	No	
Marking	L N	
Potential marking	L N	
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection	Locked: > 80 N	
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles	200, without resistive load	
Housing sheet thickness	0.5 ... 2 mm / 0.02 ... 0.079 inches	
Mounting type	Snap-in flange	
Protection type	IP40	

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Yes
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Cover color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.16 MJ
Weight	4.6 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-02
eCl@ss 9.0	27-44-06-02
ETIM 9.0	EC002566
ETIM 8.0	EC002566
PU (SPU)	50 (50) pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454233396
Customs tariff number	85366990990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
 					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	71-123231	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	IEC 61535	NL-85020	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
cURus Underwriters Laboratories Inc.	UL 1977	E45171			

Approvals for marine applications

  					
Approval	Standard	Certificate Name			
ABS American Bureau of Ship- ping	Steel Vessel Rules	19-HG1869855-PDA			
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6			
LR Lloyds Register	EN 61535	08/20047 (E2)			

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 890-702	

Documentation

Bid Text			
890-702	19.02.2019	xml 2.91 KB	
890-702	30.11.2018	doc 23.00 KB	



CAD/CAE-Data	
CAD data 2D/3D Models 890-702 ↓	CAE data EPLAN Data Portal 890-702 ↓
	WSCAD Universe 890-702 ↓
	ZUKEN Portal 890-702 ↓

1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



[Item No.: 891-8992/205-101](#)
pre-assembled connecting cable; Eca; Plug/open-ended; 2-pole; Cod. A; H05VV-F 2 x 1.0 mm²; 1 m; 1,00 mm²; black



[Item No.: 891-8992/005-101](#)
pre-assembled interconnecting cable; Eca; Socket/plug; 2-pole; Cod. A; H05VV-F 2 x 1.0 mm²; 1 m; 1,00 mm²; black

1.1.2 Male connector/plug

[Item No.: 890-212](#)
Plug; 2-pole; Cod. A; 1,50 mm²; black

[Item No.: 890-112](#)
Plug; with strain relief housing; 2-pole; 1,50 mm²; black

[Item No.: 890-212/342-000](#)
Plug; with strain relief housing; 2-pole; Cod. A; 1,50 mm²; black

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 890-642](#)
Lockout cap; 2-pole; for cutouts; Plastic; black



[Item No.: 890-692](#)
Lockout cap; 2-pole; for cutouts; Plastic; white

1.2.2 Tool

1.2.2.1 Operating tool






[Item No.: 890-382](#)
Operating tool; 2-way; green



[Item No.: 210-719](#)
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes

Conductor termination



- 1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm

To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.

To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.