



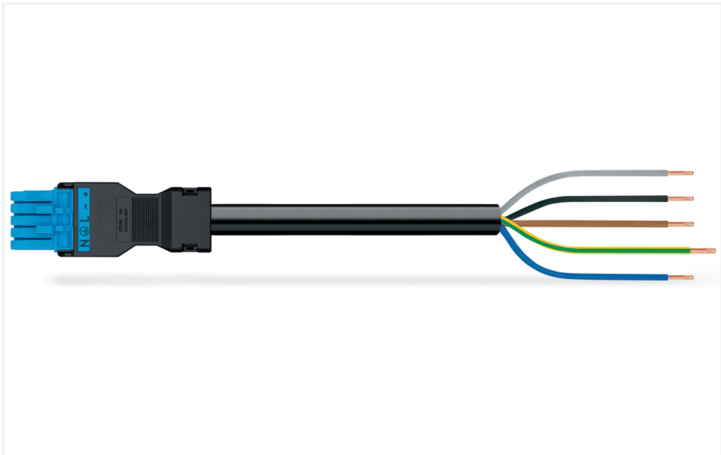

Color: ■ blue

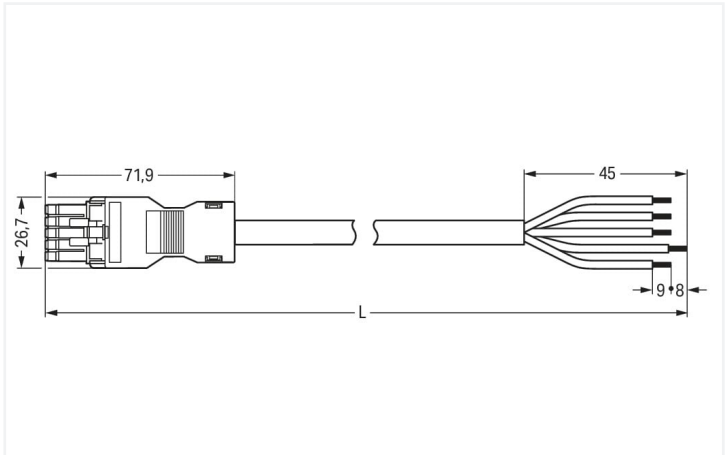

Dimensions in mm

Cable assembly WINSTA® MINI with strain relief

The WINSTA® MINI cable assembly I coding is the pluggable solution for your use in control cabinets, for lighting connections or on PCBs. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to various requirements in seconds. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected against ingress by solid granular objects with a diameter of less than 1 mm in accordance with protection type IP40. WINSTA® MINI pluggable installation connectors with I coding in blue are primarily suitable for intelligent, for example for the dimming of DALI lights. Due to its particularly compact dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is especially suitable in very restricted spaces, i.e., for installations when very little room is available. This product meets all the mandatory safety requirements of fire class E; as a result it can be used in domains where fire safety is relevant.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable assembly is provided with a socket and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose quality and durability – with fire class E from WAGO makes the electrical installation of electrical components visibly easier.

- pluggable installation connectors with protection against mismatching
- compact design for conductors with a cross-section up to 1.5 mm²
- with I coding for controlling light (DALI standard)
- exact dimensions
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data				General information	
Ratings per		IEC/EN 60664-1		Note on contact resistance	
Overvoltage category	III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree	3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	400 V	-	-		
Rated surge voltage	6 kV	-	-		
Rated current	16 A	-	-		



Connection data			
Total number of potentials	5	Connection 1	
PE function	Preceding PE contact		
Conductor preparation	ultrasonically tip-bonded		
		Strip length	9 mm / 0.35 inches
		Pole number	5
		Wire cross-section	1.5 mm²
		Strip length (outer insulation)	45 mm
		Connection type	Socket - free end

Physical data		
Pin spacing		4.4 mm / 0.173 inches
Width		26.7 mm / 1.051 inches
Height		15.8 mm / 0.622 inches
Total length		2 m

Mechanical data		
Use		DALI, Lighting Management
Coding		I
Variable coding		No
Marking		N ⊕ L - +
Potential marking		N ⊕ L - +
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection		when locked: > 80N
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles		200, without resistive load
Connection type		Socket - free end
Type of pre-assembled cable		Connecting cable
Cable type		H05VV-F 5G1.5
Protection type		IP40

Plug-in connection		
Mismating protection		Yes
Note on mismating protection		All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever		Can be retrofitted
Locking of plug-in connection		Locking lever
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data		
Note (material data)		Information on material specifications can be found here
Color		blue
Insulation material (main housing)		Polyamide (PA66)
Fire class per EN 50575		E _{ca}
Contact material		Copper or copper alloy; surface-treated
Contact Plating		Tin
Fire load		60.005 MJ
Connector color		blue
Strain relief color		black



Material data	
Sheathed cable color	black
Printing color of sheathed cable	white
Halogen-free	No
Silicon-free	Yes
Sheath material	PVC
Rubber cable	No
Weight	320.4 g
Copper weight of the pipe	0.072 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143386340
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7971
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123232



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
891-8985/106-201

↓

Documentation

Bid Text

891-8985/106-201	19.02.2019	xml 3.03 KB	↓
891-8985/106-201	02.12.2014	doc 25.50 KB	↓

CAD/CAE-Data

CAE data

WSCAD Universe
891-8985/106-201

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



Item No.: 890-111
Locking lever; for flying leads; for tool operation; black



Item No.: 890-131
Locking lever; for flying leads; for tool operation; white



Item No.: 890-101
Locking lever; for manual operation; black



Item No.: 890-121
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 897-2003
Protective cap; Type2; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)
Mounting carrier; 2- to 5-pole; for flying leads; black

[Item No.: 890-311](#)
Mounting carrier; 2- to 5-pole; for flying leads; white