



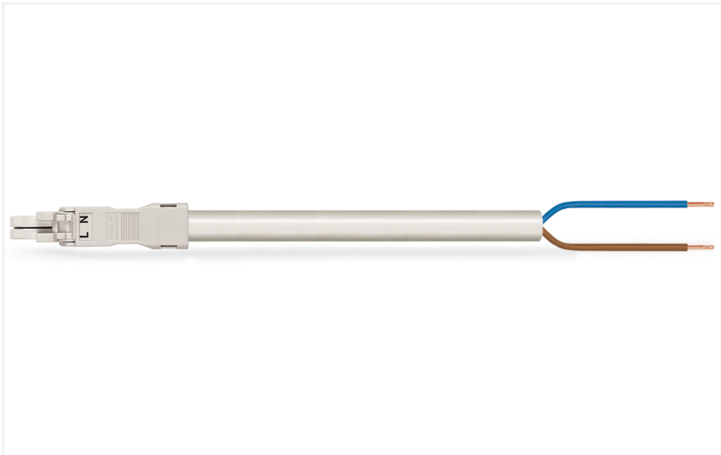

Color: white

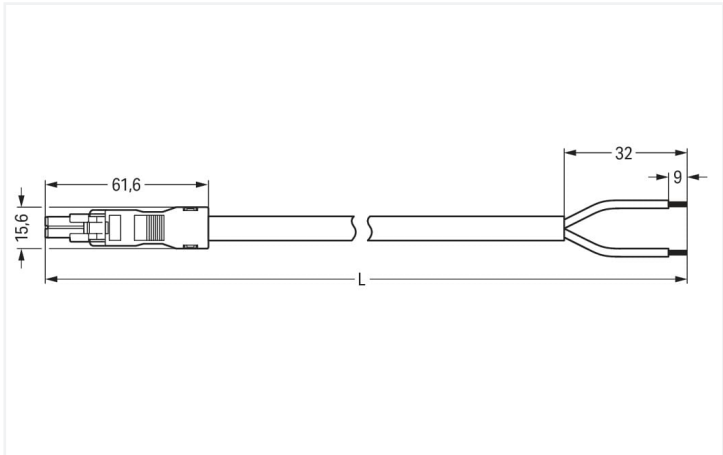

Dimensions in mm

Cable assembly WINSTA® MINI rated current 10 A

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MINI cable assembly with protection against mismatching. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to an enormous variety of requirements in no time flat. For greater protection in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. The pluggable installation connector is protected against ingress by solid granular objects with a diameter of less than 1 mm in accordance with protection type IP40. Thanks to the color coding and mechanical A coding of WINSTA® MINI pluggable installation connectors, you can clearly distinguish different circuits. WINSTA® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is primarily suited for lights, for example, since due to LED technology, these offer much less space for the connection technology. This product meets all the mandatory safety requirements of fire class E; as a result it can be used in areas where fire safety is relevant.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It offers fast, secure and, above all, error-free installation of components and cables. Now you can also cut installation expenses without compromising safety and quality: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- protection against mismatching eliminates errors
- easy tool-free operation, a wide range of coding options
- with A coding for a great number of uses
- ready to install and use immediately
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage		250 V	-	-		
Rated surge voltage		4 kV	-	-		
Rated current		10 A	-	-		



Connection data			
Total number of potentials	2	Connection 1	
Conductor preparation	ultrasonically tip-bonded	Strip length	9 mm / 0.35 inches
		Pole number	2
		Wire cross-section	1 mm²
		Strip length (outer insulation)	32 mm
		Connection type	Socket - free end

Physical data			
Pin spacing		4.4 mm / 0.173 inches	
Width		15.6 mm / 0.614 inches	
Height		13.2 mm / 0.52 inches	
Total length		1 m	

Mechanical data			
Use		General mains applications	
Coding		A	
Variable coding		No	
Marking		L N	
Potential marking		L N	
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection		when locked: > 80N	
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles		200, without resistive load	
Connection type		Socket - free end	
Type of pre-assembled cable		Connecting cable	
Cable type		H05VV-F 2x1	
Protection type		IP40	

Plug-in connection			
Mismating protection		Yes	
Note on mismating protection		All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever		Can be retrofitted	
Locking of plug-in connection		Locking lever	
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	

Material data			
Note (material data)		Information on material specifications can be found here	
Color		white	
Insulation material (main housing)		Polyamide (PA66)	
Fire class per EN 50575		E _{ca}	
Contact material		Copper or copper alloy; surface-treated	
Contact Plating		Tin	
Fire load		29.642 MJ	
Connector color		white	
Strain relief color		white	



Material data		
Sheathed cable color		white
Printing color of sheathed cable		black
Halogen-free		No
Silicon-free		Yes
Sheath material		PVC
Rubber cable		No
Weight		61.9 g
Copper weight of the pipe		0.0192 kg/m

Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data		
eCl@ss 10.0		27-44-06-04
eCl@ss 9.0		27-44-06-04
ETIM 9.0		EC002587
ETIM 8.0		EC002587
PU (SPU)		1 pcs
Packaging type		unpacked
Country of origin		PL
GTIN		4055143362283
Customs tariff number		85444290900

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
891-8992/105-102

↓

Documentation				
Bid Text				
891-8992/105-102	19.02.2019	xml 2.99 KB		↓
891-8992/105-102	21.11.2014	doc 24.00 KB		↓

CAD/CAE-Data

CAE data	
EPLAN Data Portal 891-8992/105-102	
WSCAD Universe 891-8992/105-102	

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)
Locking lever; for manual operation; black



[Item No.: 890-121](#)
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)
Protective cap; Type1; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)
Mounting carrier; 2- to 5-pole; for flying leads; white