



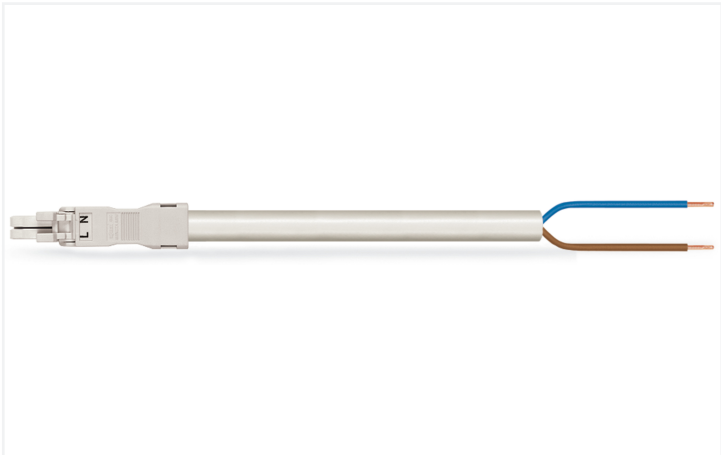

Color: ■ white

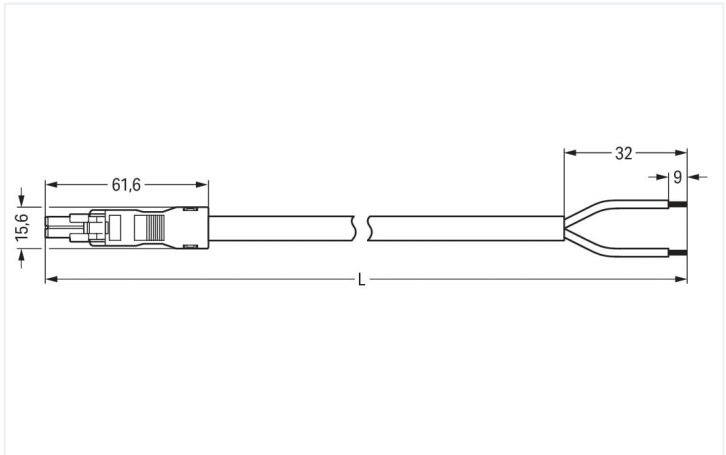

Dimensions in mm

Cable assembly WINSTA® MINI with protection against mismating

The WINSTA® MINI cable assembly A coding allows installation of solid and fine-stranded conductors. WAGO pluggable installation connectors can be used when specifications repeat or are distributed on a specified grid, for example for installing grid lighting or flush-mount lighting. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector is protected in accordance with protection type IP40. Users' fingers and tools will never come into contact with live elements. The WINSTA® MINI pluggable installation connector with A coding in white or black is usually used for general mains applications in power distribution. WINSTA® MINI satisfies the demand for miniaturisation. Our smallest pluggable connection system is very good for lights, for instance, since due to LED technology, these offer much less space for the connection technology. This product meets all the mandatory safety requirements of fire class E; thus it can be used in areas where fire safety is relevant. The cable assembly is halogen-free. This eliminates the addition of environmental pollutants during production. It also achieves a higher fire class, since halogen-free materials are flame-resistant.

Fast, error-free assembly thanks to cable assemblies from WAGO

A socket and a free end are provided. WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It offers fast, secure and, above all, error-free installation of components and cables. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with fire class E from WAGO.

- pluggable installation connectors with protection against mismating
- consistent IP40 protection
- for any mains application
- flexible installation to save space
- quick replacement of defective units during ongoing operation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage		250 V	-	-		
Rated surge voltage		4 kV	-	-		
Rated current		16 A	-	-		



Connection data			
Total number of potentials	2	Connection 1	
Conductor preparation	ultrasonically tip-bonded	Strip length	9 mm / 0.35 inches
		Pole number	2
		Wire cross-section	1.5 mm²
		Strip length (outer insulation)	32 mm
		Connection type	Socket - free end

Physical data			
Pin spacing		4.4 mm / 0.173 inches	
Width		15.6 mm / 0.614 inches	
Height		13.2 mm / 0.52 inches	
Total length		7 m	

Mechanical data			
Use		General mains applications	
Coding		A	
Variable coding		No	
Marking		L N	
Potential marking		L N	
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection		when locked: > 80N	
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles		200, without resistive load	
Connection type		Socket - free end	
Type of pre-assembled cable		Connecting cable	
Cable type		H05Z1Z1-F 2x1.5	
Protection type		IP40	

Plug-in connection			
Mismating protection		Yes	
Note on mismating protection		All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever		Can be retrofitted	
Locking of plug-in connection		Locking lever	
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	

Material data			
Note (material data)		Information on material specifications can be found here	
Color		white	
Insulation material (main housing)		Polyamide (PA66)	
Fire class per EN 50575		E _{ca}	
Contact material		Copper or copper alloy; surface-treated	
Contact Plating		Tin	
Fire load		209.642 MJ	
Connector color		white	
Strain relief color		white	



Material data	
Sheathed cable color	white
Printing color of sheathed cable	black
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	557.5 g
Copper weight of the pipe	0.029 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143392839
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
CCA KEMA KEUR		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7971
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123232
Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
891-8992/116-702			

Documentation

Bid Text			
891-8992/116-702	19.02.2019	xml 3.02 KB	↓
891-8992/116-702	21.11.2014	doc 24.50 KB	↓

CAD/CAE-Data

CAE data			
EPLAN Data Portal			↓
891-8992/116-702			
WSCAD Universe			↓
891-8992/116-702			

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)
Locking lever; for manual operation; black



[Item No.: 890-121](#)
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)
Protective cap; Type1; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black

Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white