




Color: ■ blue

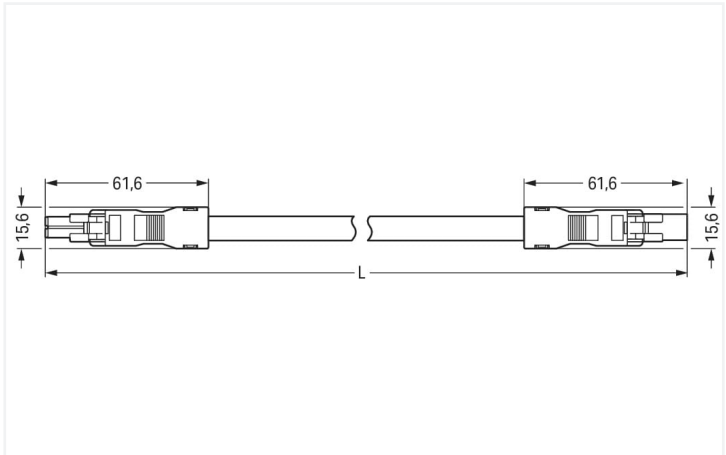

Dimensions in mm

Cable assembly WINSTA® MINI with protection type IP20

The WINSTA® MINI cable assembly rated current 16 A is the pluggable solution for your use in control cabinets, for lighting connections or on PCBs. WAGO pluggable installation connectors can be used when specifications repeat or are planned on a specific pattern, for example for installing grid lighting or flush-mount lighting. For greater protection in electrical installations, the pluggable installation connector is provided with mechanical protection against mismatching. I coding in blue is used to identify WINSTA® MINI pluggable installation connectors, which are used primarily in automation of buildings for controlling lighting. Thanks to its particularly minimal dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is specifically suitable in very tight spaces, i.e., for connections when very little room is available. According to the European CPR, the fire class of the cables used for construction is decisive for the safety of buildings, too. For houses with average safety requirements, cable assemblies with fire class E are suitable. In the production of this cable assembly, halogens were deliberately omitted. That is an important contribution to climate protection.

Fast, secure pluggable connections – cable assemblies from WAGO

A socket and a plug are provided. WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Choose durability and quality – with marking from WAGO makes the installation of electrical components substantially easier.

- effective protection against mismatching
- easy tool-free operation, a wide range of coding options
- with I coding for use in building automation (lighting control)
- ready to install and use immediately
- rapid, structured electrical installation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage		250 V	-	-		
Rated surge voltage		4 kV	-	-		
Rated current		16 A	-	-		



Connection data			
Total number of potentials		2	
		Connection 1	
		Pole number	2
		Wire cross-section	1.5 mm²
		Connection type	Socket - Plug
Physical data			
Pin spacing		4.4 mm / 0.173 inches	
Width		15.6 mm / 0.614 inches	
Height		13.2 mm / 0.52 inches	
Total length		6 m	
Mechanical data			
Use		DALI, Lighting Management	
Coding		I	
Variable coding		No	
Marking		+ -	
Potential marking		+ -	
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection		when locked: > 80N	
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles		200, without resistive load	
Connection type		Socket - Plug	
Type of pre-assembled cable		Interconnecting cable	
Cable type		H05Z1Z1-F 2x1.5	
Protection type		IP20; IP40 when mated	
Plug-in connection			
Mismating protection		Yes	
Note on mismating protection		All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever		Can be retrofitted	
Locking of plug-in connection		Locking lever	
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	
Material data			
Note (material data)		Information on material specifications can be found here	
Color		blue	
Insulation material (main housing)		Polyamide (PA66)	
Fire class per EN 50575		E _{ca}	
Contact material		Copper or copper alloy; surface-treated	
Contact Plating		Tin	
Fire load		179.364 MJ	
Connector color		blue	
Strain relief color		black	
Sheathed cable color		black	
Printing color of sheathed cable		white	



Material data	
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	478.7 g
Copper weight of the pipe	0.029 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143391603
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 891-8982/016-601	

Documentation

Bid Text			
891-8982/016-601	19.02.2019	xml 3.00 KB	
891-8982/016-601	24.11.2014	doc 24.50 KB	

CAD/CAE-Data	
CAE data	
WSCAD Universe 891-8982/016-601	

1 Compatible Products
1.1 Required Accessories
1.1.1 Locking system
1.1.1.1 Locking system



[Item No.: 890-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)
Locking lever; for manual operation; black



[Item No.: 890-121](#)
Locking lever; for manual operation; white

1.2 Optional Accessories
1.2.1 Cover
1.2.1.1 Cover



[Item No.: 897-2001](#)
Protective cap; Type1; for sockets and plugs; PVC; red

1.2.2 Installation
1.2.2.1 Mounting accessories



[Item No.: 890-310](#)
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)
Mounting carrier; 2- to 5-pole; for flying leads; white