




Color: ■ black

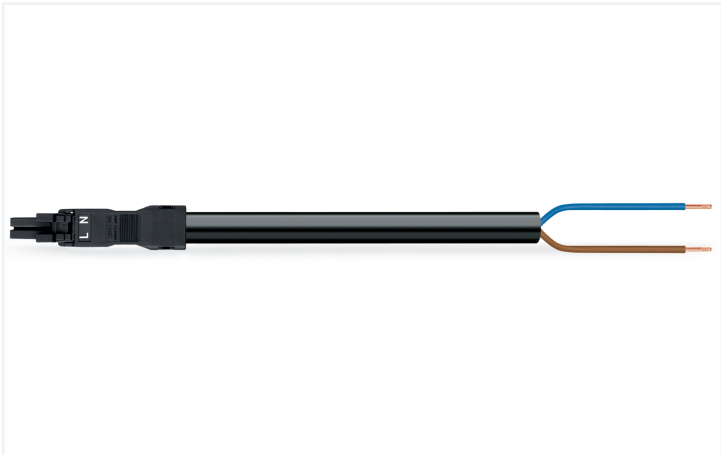

Dimensions in mm

Cable assembly *WINSTA*® MINI with protection type IP40

The *WINSTA*® MINI cable assembly rated current 10 A is the pluggable solution for your use in control cabinets, on PCBs or for lighting connections. The pluggable installation connectors with spring pressure connection technology work entirely without screw connections. They allow resource-efficient, error-free installation in a large number of possible uses. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected against ingress by solid granular objects with a diameter below 1 mm in accordance with protection type IP40. Thanks to the color coding and mechanical A coding of *WINSTA*® MINI pluggable installation connectors, you can clearly distinguish different circuits. *WINSTA*® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for example, since as a result of LED technology; due to complex systems, these offer much less space for the connection technology. According to the European CPR, the fire class of the cables used for construction is essential for building safety, too. For buildings with medium-level safety requirements, cable assemblies with fire class E are suitable.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The *WINSTA*® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection type IP40 from WAGO.

- protection against mismatching eliminates errors
- easy tool-free operation, a wide range of coding options
- with A coding for a large number of applications
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category	III	III	II		approx. 1 mΩ of contact resistance	
Pollution degree	3	2	2		approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	250 V	-	-			
Rated surge voltage	4 kV	-	-			
Rated current	10 A	-	-			



Connection data		
Total number of potentials	2	Connection 1
Conductor preparation	ultrasonically tip-bonded	
Strip length	9 mm / 0.35 inches	
Pole number	2	
Wire cross-section	1 mm²	
Strip length (outer insulation)	32 mm	
Connection type	Socket - free end	

Physical data		
Pin spacing		4.4 mm / 0.173 inches
Width		15.6 mm / 0.614 inches
Height		13.2 mm / 0.52 inches
Total length		5 m

Mechanical data		
Use		General mains applications
Coding		A
Variable coding		No
Marking		L N
Potential marking		L N
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection		when locked: > 80N
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles		200, without resistive load
Connection type		Socket - free end
Type of pre-assembled cable		Connecting cable
Cable type		H05VV-F 2x1
Protection type		IP40

Plug-in connection		
Mismating protection		Yes
Note on mismating protection		All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever		Can be retrofitted
Locking of plug-in connection		Locking lever
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data		
Note (material data)		Information on material specifications can be found here
Color		black
Insulation material (main housing)		Polyamide (PA66)
Fire class per EN 50575		E _{ca}
Contact material		Copper or copper alloy; surface-treated
Contact Plating		Tin
Fire load		149.626 MJ
Connector color		black
Strain relief color		black



Material data	
Sheathed cable color	black
Printing color of sheathed cable	white
Halogen-free	No
Silicon-free	Yes
Sheath material	PVC
Rubber cable	No
Weight	290.5 g
Copper weight of the pipe	0.0192 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143323116
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
CCA KEMA KEUR		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7971
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123232
Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
891-8992/105-501			

Documentation

Bid Text			
891-8992/105-501	19.02.2019	xml 2.99 KB	↓
891-8992/105-501	21.11.2014	doc 24.00 KB	↓

CAD/CAE-Data

CAE data	
EPLAN Data Portal 891-8992/105-501	↓
WSCAD Universe 891-8992/105-501	↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)
Locking lever; for manual operation; black



[Item No.: 890-121](#)
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)
Protective cap; Type1; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black

Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white