


Concord

COLOSSAL 400mm 840 OPAL DIR+HAL WHITE DALI 2071143

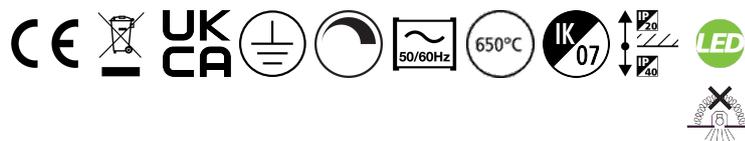

Features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 2680lm luminous flux, 20.7W system power, 129lm/W luminaire efficacy. DALI dimmable. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview


Product name	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	2680
Luminaire efficacy (lm/W)	129
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	20.7
Electrical protection	Class I
Control gear type	LED driver constant current

Concord

COLOSSAL 400mm 840 OPAL DIR+HAL WHITE DALI 2071143

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711437
Warranty	5 years
Dimming method	DALI-2
Colour Code	840

Photometry

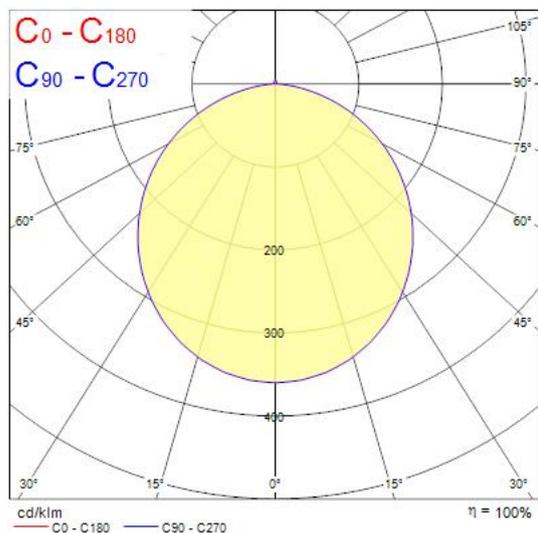

Technical drawings

