

SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI
0048753



Features

- Sylproof Superia, integrated LED weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, DALI dimmable, 4000K, CRI80, 7100 lm, 47 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK08, IP65.


Product Overview

Product name	SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	7100
Luminaire efficacy (lm/W)	145
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	47
Electrical protection	Class I
Control gear type	Electronic ballast
Minimum dimming level (%)	1

SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI 0048753

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487533
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	7100

Photometry

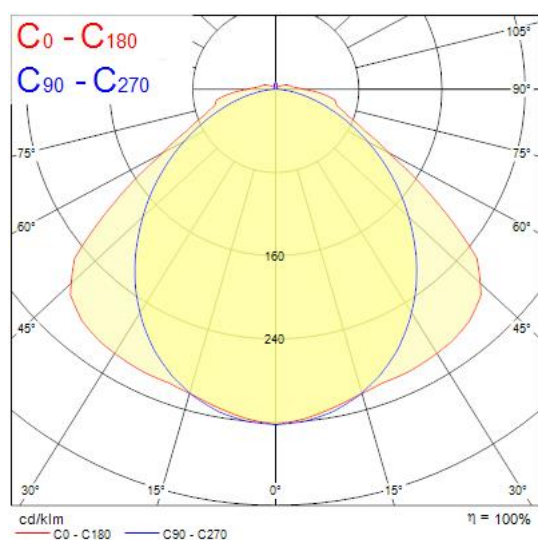

Technical drawings

