



Features

• Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 595x595x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x130mm, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 2800lm, 28W, 100lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.


Product Overview

Product name	RANA LED R 600 LO 3K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4273746
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19

RANA LED R 600 LO 3K LOUV+PRI W GEN2
0052400


Photobiological Risk Group	RG0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524009
Warranty	5 years
Dimming method	N/A

Photometry

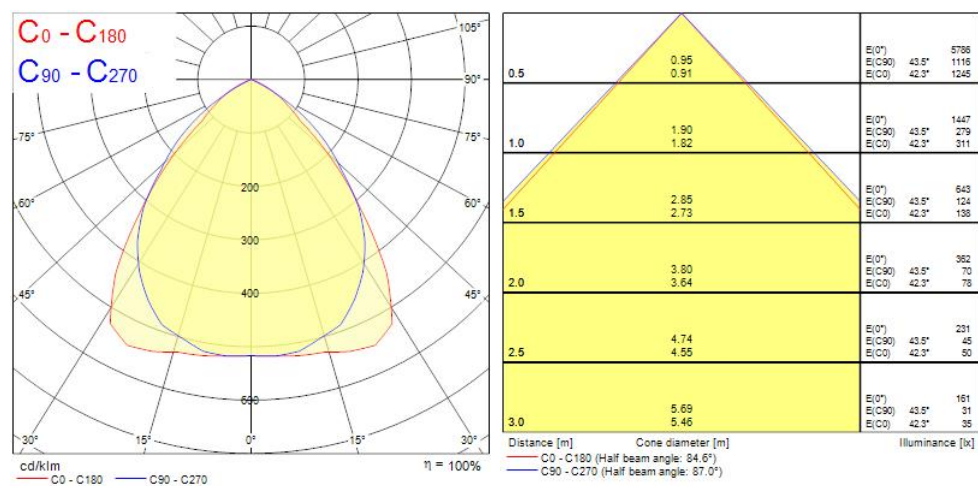

RANA LED R 600 LO 3K LOUV+PRI W GEN2
0052400

Technical drawings

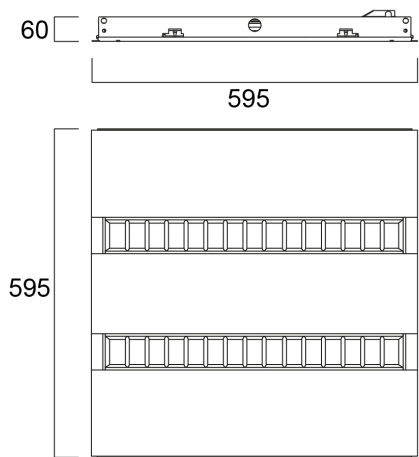

Data table

GENERAL DATA

Product name	RANA LED R 600 LO 3K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4273746
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	100

RANA LED R 600 LO 3K LOUV+PRI W GEN2 0052400

Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	28
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	275
Inrush Current (A)	22
Inrush Duration (μ s)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 13A C Breaker	36
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	56
Max. products per 10A B Breaker	17
Max. products per 13A B Breaker	22
Max. products per 16A B Breaker	27
Max. products per 20A B Breaker	34

RANA LED R 600 LO 3K LOUV+PRI W GEN2
0052400

Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	60
Weight (kg)	4.5
Recessed Depth (mm)	120

PACKAGING

Product EAN number	5410288524009
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (inner)	05410288524009
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5



RANA LED R 600 LO 3K LOUV+PRI W GEN2
0052400

Packaging outer depth (cm)	65.0
----------------------------	------

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No