




Features

• Linear LED Luminaire, RAL9003 (white) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, opal diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRi (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), non-dimmable driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip swith in direct mode (24-26W), max system power: 26W, max fixture output: 3250lm @ 4000K CCT, efficacy at max output 125lm/W, additional 2-steps power dip switch when indirect module added (36-39W), max system power in D/I combination: 39W, max fixture output: 4850lm @ 4000K CCT, efficacy at max output 124lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shiped with through wiring.

Product Overview

Cap/Base	N/A
Beam Angle (°)	110
Control gear type	LED driver constant current
Dimmable	No

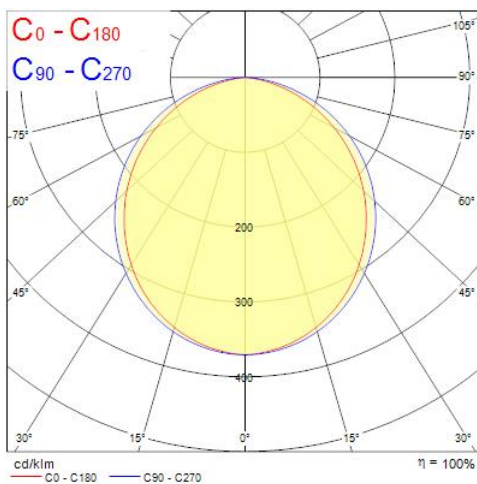

Distance [m]	Cone diameter [m]	E(0°) E(C90) E(C0)	Illuminance [lx]
0.5	1.53 1.28	4967 407 586	
1.0	3.07 2.55	1247 102 147	
1.5	4.60 3.83	554 45 65	
2.0	6.14 5.10	312 25 37	
2.5	7.67 6.38	199 16 23	
3.0	9.20 7.65	139 11 16	

Distance [m] Cone diameter [m]

— C0 - C180 (Half beam angle: 103.8°)
— C90 - C270 (Half beam angle: 113.8°)

0.5	1.50 1.29			E ₁ (0°) E ₁ (C90) E ₁ (C0)	4519 412 556
1.0	3.00 2.58			E ₁ (0°) E ₁ (C90) E ₁ (C0)	1205 103 139
1.5	4.50 3.87			E ₁ (0°) E ₁ (C90) E ₁ (C0)	535 46 62
2.0	6.00 5.16			E ₁ (0°) E ₁ (C90) E ₁ (C0)	301 25 35
2.5	7.50 6.45			E ₁ (0°) E ₁ (C90) E ₁ (C0)	193 16 22
3.0	9.00 7.74			E ₁ (0°) E ₁ (C90) E ₁ (C0)	134 11 15
Distance [m]		Cone diameter [m]		Illuminance [lx]	
— C0 - C180 (Half beam angle: 104.4°)					
— C90 - C270 (Half beam angle: 112.6°)					

1147

50 []

73 [_____]
[_____]

OTAO LINEAR 1.2 OPAL 830/840 MP WH 0041800

Data table

GENERAL DATA

Product name	OTAO LINEAR 1.2 OPAL 830/840 MP WH
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002892
E-number FI	4170585
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	26
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9

OTAO LINEAR 1.2 OPAL 830/840 MP WH 0041800

THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	15.0
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	650
Inrush Current (A)	7.2
Inrush Duration (μ s)	190
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	39
Max. products per 16A C Breaker	62
Max. products per 10A B Breaker	39
Max. products per 16A B Breaker	62
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	100000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1147
Nominal Product Width (mm)	50



OTAO LINEAR 1.2 OPAL 830/840 MP WH
0041800

Nominal Product Height (mm)	73
Weight (kg)	1.7

PACKAGING

Product EAN number	5410288418001
Packaging single length / height (cm)	122.0
Packaging single width (cm)	6.1
Packaging single depth (cm)	7.8
DUN14 (inner)	15410288418008
Units per outer package	4
Packaging outer length / height (cm)	124.0
Packaging outer width (cm)	14.2
Packaging outer depth (cm)	19.4

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No