




Features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 600 LEDs; 5150lm per 5m (1030lm per 1m); 24V; 4000K; CRI90; R9>50; SDCM≤3;Compatible with emergency packs: 0046600, 0046601

Product Overview

|                                   |                          |
|-----------------------------------|--------------------------|
| Product name                      | Flex Pro IP20 5150lm 940 |
| Technology                        | LED                      |
| General application               | Hospitality              |
| ETIM Class                        | EC002706                 |
| E-number FI                       | 4278334                  |
| Fixture luminous flux (lm)        | 5150                     |
| Luminaire efficacy (lm/W)         | 107                      |
| Correlated colour temperature (k) | 4000                     |
| Light colour                      | Neutral White            |
| CRI (Ra)                          | 90                       |
| Colour Variation Initial (SDCM)   | 3                        |
| Beam Angle (°)                    | 120                      |
| Photobiological Risk Group        | RG1                      |
| Power consumption (W)             | 48                       |
| Total power consumption (W)       | 48                       |
| Electrical protection             | Class III                |
| IP rating                         | IP20                     |
| IK rating                         | IK00                     |
| Product EAN number                | 5410288681771            |
| Warranty                          | 5 years                  |
| Dimming method                    | Other                    |
| Useful luminous flux (#use)       | 5150                     |

Photometry

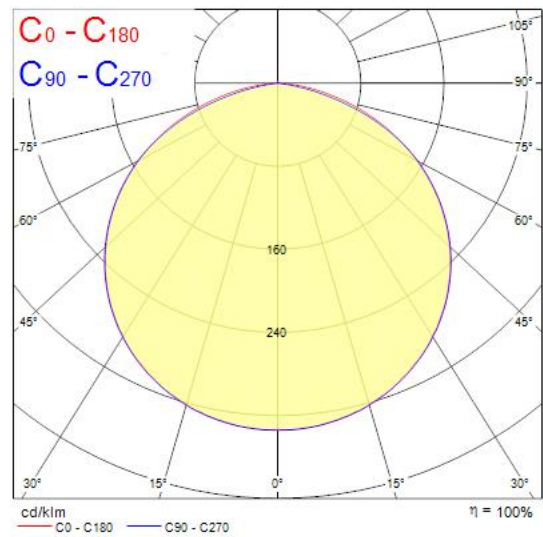

Technical drawings

