


ONETRACK 1M WHITE 9000A-1/W-ST
9200501



Features


- Onetrack - 3 circuit track + 2 circuit control L1/L2/ L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC, DALI, DMX, 1-10V etc. compatible, circuits can be controlled individually, aluminum body, suitable for surface and suspended mounting, 1000 x 30.7 x 37.8 mm (L x W x H), white (RAL 9010).

Product Overview

Product name	ONETRACK 1M WHITE 9000A-1/W-ST
Technology	Accessory
Housing	Aluminium
Mount	Suspended, Ceiling surface mounting, Wall surface mounted
General application	Museums & Galleries, Office
ETIM Class	EC000101
Electrical protection	Class I
Housing colour	White
Product EAN number	4012289005016
Warranty	5 years

ONETRACK 1M WHITE 9000A-1/W-ST
9200501

Technical drawings

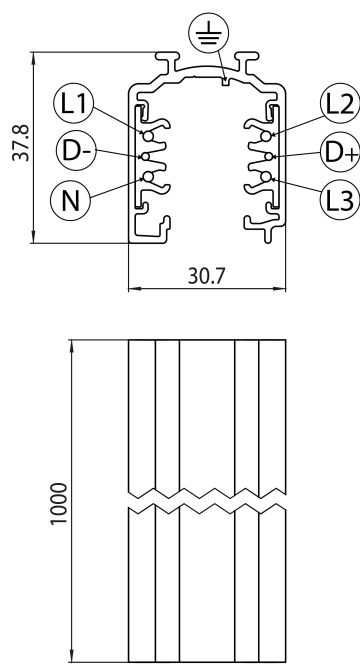

Data table

GENERAL DATA

Product name	ONETRACK 1M WHITE 9000A-1/W-ST
Technology	Accessory
Accessory type	Electrical
Type of accessory	Track
Housing	Aluminium
Mount	Suspended, Ceiling surface mounting, Wall surface mounted
General application	Museums & Galleries, Office
ETIM Class	EC000101
Warranty	5 years

ONETRACK 1M WHITE 9000A-1/W-ST 9200501

ELECTRICAL DATA

Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Control gear required	No

PHYSICAL DATA

Housing colour	White
Nominal Product Length (mm)	1000
Nominal Product Width (mm)	30.7
Nominal Product Height (mm)	37.8
Weight (kg)	0.84

PACKAGING

Product EAN number	4012289005016
Packaging single length / height (cm)	106.0
Packaging single width (cm)	3.3
Packaging single depth (cm)	3.5
Units per outer package	138
Packaging outer length / height (cm)	110.0
Packaging outer width (cm)	80.0
Packaging outer depth (cm)	50.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No