




Features

- UV-A blacklight lamp with a radiation at 368nm which is widely accepted as the most important frequency for the attraction of insects.

Product Overview

Product name	MiniLynx 20W E27 BL368
Technology	Special applications
Lamp shape	U shape
Cap/Base	E27
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
ETIM Class	EC002962
E-number FI	4940706
Light colour	BL368 Blacklight
Photobiological Risk Group	RG0
Wattage (W)	20
Power consumption (W)	20
Dimmable	No
Average life (Nominal) (h)	8000
Product EAN number	5410288257068
Dimming method	N/A

Technical drawings

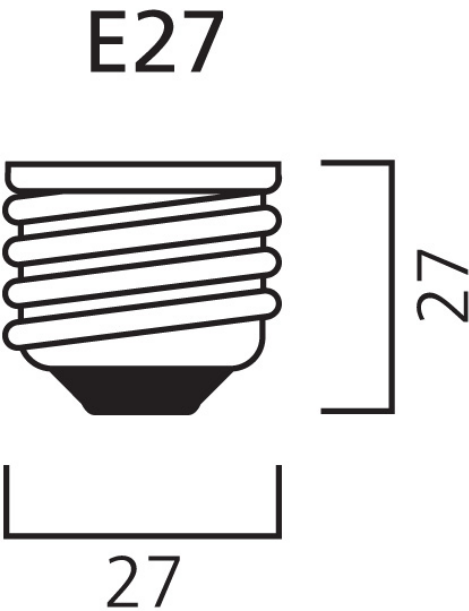

Data table

GENERAL DATA

Product name	MiniLynx 20W E27 BL368
Technology	Special applications
Lamp shape	U shape
Cap/Base	E27
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
Operating temperature range (°C)	-10°C...+50°C
ETIM Class	EC002962
E-number FI	4940706

OPTICAL DATA

UV-A intensity at 1m	32
----------------------	----

MiniLynx 20W E27 BL368 0025706

Light colour	BL368 Blacklight
Adjustable chromaticity	N
Photobiological Risk Group	RG0

ELECTRICAL DATA

Power consumption (W)	20
Wattage (W)	20
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	No
Dimming method	N/A
Inrush Current (A)	5

LIFETIME DATA

Average life (Nominal) (h)	8000
----------------------------	------

PHYSICAL DATA

Nominal Product Height (mm)	168
Nominal Product Diameter (mm)	54
Max. Lamp Diameter (mm) - D	52
Weight (kg)	0.102

PACKAGING

Product EAN number	5410288257068
Packaging single length / height (cm)	5.2
Packaging single width (cm)	5.2
Packaging single depth (cm)	17.4
DUN14 (inner)	15410288257065
Units per inner package	10
Packaging inner length / height (cm)	27.5
Packaging inner width (cm)	11.5
Packaging inner depth (cm)	19.5



MiniLynx 20W E27 BL368
0025706

Units per outer package	50
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	29.5
Packaging outer depth (cm)	22.5

SAFETY DATA

Lamp mercury content (mg)	2.5
Optimal operating condition (°C)	-10-50
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Flykilling - Insect attraction
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not suitable for household