



Features

- Integrated LED recessed spotlight, fixed, RAL9016 colour, 500lm, 7.0W, phase dim-to-warm trailing/leading edge, 3000K to 2200K, 100° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68-74mm cutout, frosted lens. Additional silver bezel included in the packaging.


Product Overview

Product name	SYLSPOT 500LM IP65 SUNDIM WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	71
Light colour	Warm White-Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	10

SYLSPOT 500LM IP65 SUNDIM WHT 0005282

LED Flickering Rate	Medium (21% - 40%)
Housing colour	White
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288052823
Warranty	3 years
Dimming method	Mains: leading / trailing edge
Colour Code	830
Useful luminous flux (#use)	500

Photometry

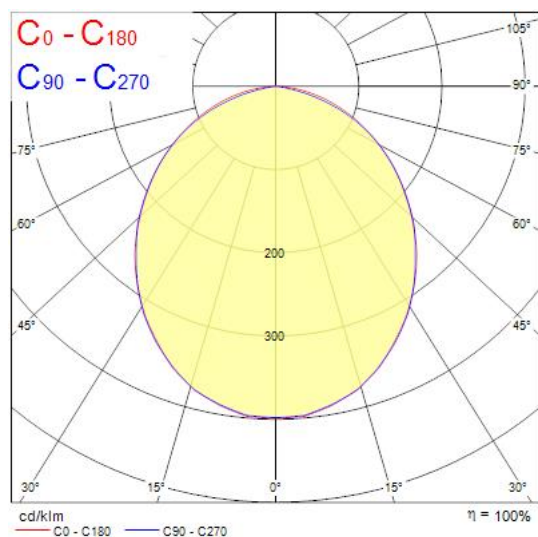

Technical drawings

