

BEACON XL 93CRI 4K MEDIUM BEAM L3 WHITE 2059701



Features

• Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 34° medium beam, optics: Polycarbonate lens, colour temperature: 4000K neutral white, total system power: 33W, total fixture output: 3200lm, luminaire efficacy: 97lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, non-dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.


Product Overview

Product name	BEACON XL 93CRI 4K MEDIUM BEAM L3 WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4280861
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	97
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	93

**BEACON XL 93CRI 4K MEDIUM BEAM L3 WHITE
2059701**

Colour Consistency (SDCM)	3
Beam Angle (°)	34
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597017
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	3200

Photometry

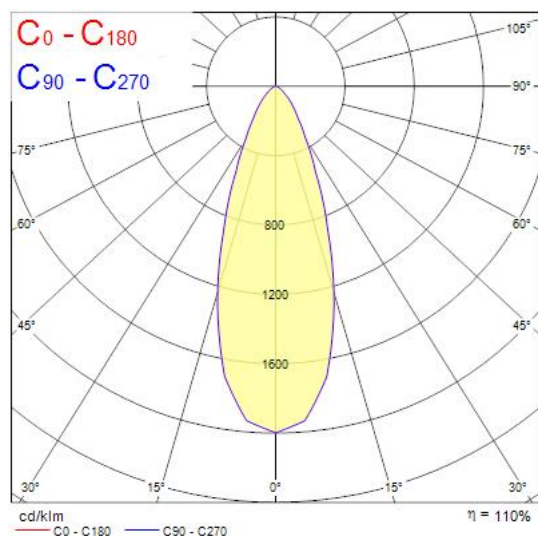

Technical drawings

