



Features

- Isoline LED linear luminaire for industrial and commercial applications. 3380mm length with 1.7m blank section, asymmetrical (Left) optics provide homogenous light distribution for wide, shelf areas. Suitable for DALI Dimming. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 56W power consumption, 8000lm luminous flux, 143 lm/W efficacy, 3380 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.


Product Overview

Product name	ISOLINE 3380MM 4K 1.7ASY-L 1.7BLK DA
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000986
Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	143
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	56
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1


ISOLINE 3380MM 4K 1.7ASY-L 1.7BLK DA 0042561

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425610
Warranty	5 years
Dimming method	DALI
Colour Code	840

Photometry

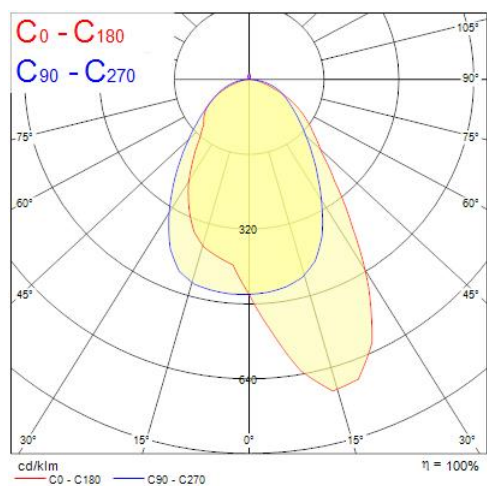

Technical drawings

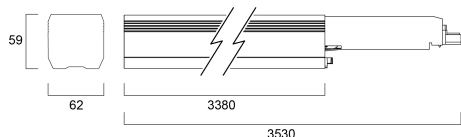

Data table

GENERAL DATA

Product name	ISOLINE 3380MM 4K 1.7ASY-L 1.7BLK DA
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+35°C
ETIM Class	EC000986
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	143
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	56
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	5.5
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI

ISOLINE 3380MM 4K 1.7ASY-L 1.7BLK DA 0042561

Minimum dimming level (%)	1
Drive current (mA)	250
Inrush Current (A)	28
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A B Breaker	14
Max. products per 16A B Breaker	23
Connectable conductor cross section - Min (mm ²)	0.5
Connectable conductor cross section - Max (mm ²)	4

LIFETIME DATA

Lifespan L70 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B10	31500

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
IK rating of sensor	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	3380
Nominal Product Width (mm)	62
Nominal Product Height (mm)	59
Weight (kg)	5.0

PACKAGING

Product EAN number	5410288425610
Packaging single length / height (cm)	353.0

ISOLINE 3380MM 4K 1.7ASY-L 1.7BLK DA 0042561

Packaging single width (cm)	6.5
Packaging single depth (cm)	5.8
DUN14 (inner)	05410288425610
Units per outer package	1
Packaging outer length / height (cm)	353.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	5.8

SAFETY DATA

Glow Wire Test (°C)	650
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No