



Features

- Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps The versatile ToLEDo Retro Candle range is the ideal replacement for halogen and incandescent lamps and perfect for chandeliers and decorative applications Same look, size and functionality as incandescent lamps Omni-directional light distribution Gives same sparkling light effect as the incandescent lamp Dimensionally identical to incandescent lamps - fits all fixtures Environment-friendly - no mercury and lower CO2 emissions



Product Overview

Product name	ToLEDo RT Candle TW V5 CL 250LM 827 E14 SL
Technology	LED
Watt (Rated) (W)	2.5
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740936
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	2.5
Power consumption (W)	2.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288294865

ToLEDo RT Candle TW V5 CL 250LM 827 E14 SL
0029486

Warranty	3 years
Useful luminous flux (#use)	250

Technical drawings

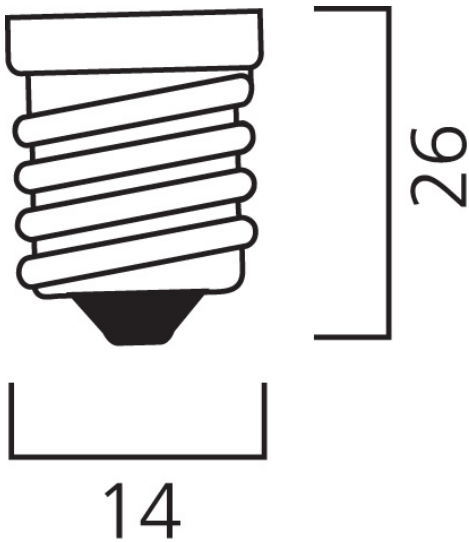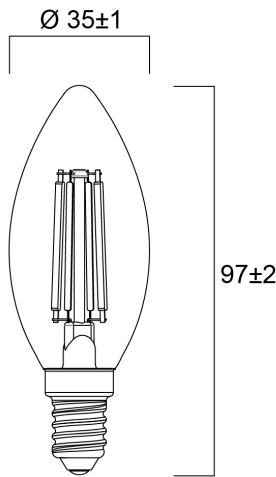

Data table

GENERAL DATA

Product name	ToLEDo RT Candle TW V5 CL 250LM 827 E14 SL
Technology	LED
Watt (Rated) (W)	2.5
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740936

ToLEDo RT Candle TW V5 CL 250LM 827 E14 SL 0029486

Warranty	3 years
----------	---------

OPTICAL DATA

Useful luminous flux (#use)	250
Luminous flux (Rated) (lm)	250
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	2.5
Wattage (W)	2.5
Equivalent watt (W)	25
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	5.9
Inrush Duration (µs)	180
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	27
Max. products per 16A B Breaker	14

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000



ToLEDo RT Candle TW V5 CL 250LM 827 E14 SL
0029486

PHYSICAL DATA

Nominal Product Length (mm)	97
Nominal Product Diameter (mm)	35
Weight (kg)	0.021

PACKAGING


Product EAN number	5410288294865
Packaging single length / height (cm)	11.0
Packaging single width (cm)	4.5
Packaging single depth (cm)	4.5
DUN14 (inner)	15410288294862
Units per outer package	6
Packaging outer length / height (cm)	14.3
Packaging outer width (cm)	9.7
Packaging outer depth (cm)	12.0

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label

**ENERG**
SYLVANIA
0029486

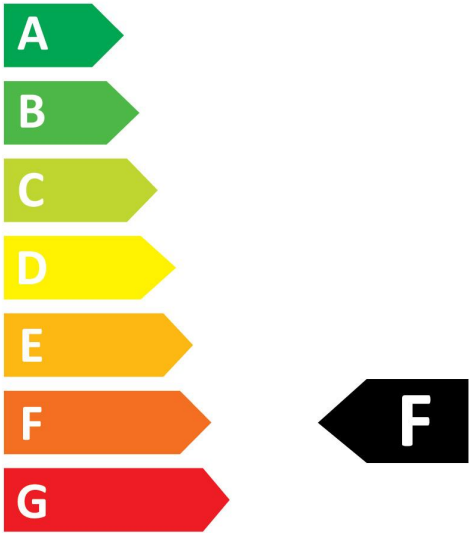


3
kWh/1000h



2019/2015

**ENERG**
SYLVANIA
0029486

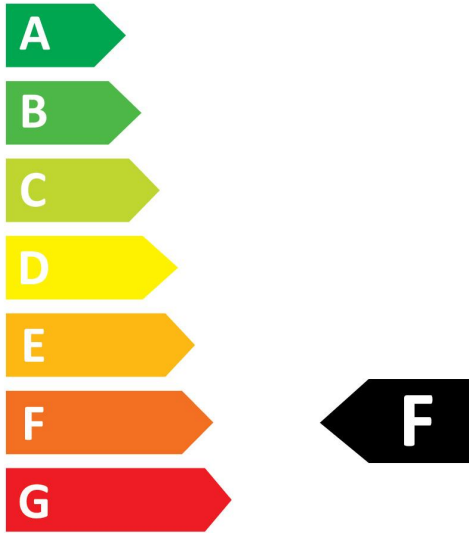

3
kWh/1000h



2019/2015