ENVIRONMENTAL PRODUCT DECLARATION

AI 2xSG 4-/6-wire HS

7MH4134-6LB00-0DA0

Type II according to ISO 14021 including life cycle impact assessment (LCIA)

SIEMENS

General information

This environmental product declaration (EPD) is based on the international standard ISO 14021 (“Environmental labels and declarations – Self declared environmental claims – Type II environmental labelling”). The data in this EPD has been evaluated on a full-scale life cycle assessment (LCA) study according to ISO 14040/44, taking into account the product category rules (PCR) for electronic and electrotechnical products and systems defined in EN 50693.

Siemens is dedicated to an environmentally conscious design of its products in line with IEC 62430 and has implemented an integrated management system according to ISO 9001, ISO 14001 and ISO 45001.

Products	**7MH4134-6LB00-0DA0**
Represented by the reference product	7MH4134-6LB00-0DA0
Product Description	SIMATIC ET 200SP, Analog input module, AI 2 X SG 4-/6-wire High Speed, two-channel analog input module for strain gauges (full bridges), Color code CC00, Module diagnostics 28/16 bit, 2xLC load cell interface (1-4mV/V), suitable for BU type A0.
Functional Unit	Production of 1 pc. AI 2xSG 4-/6-wire HS and use over the reference service lifetime of 10 years.[1]

[1] The lifetime value used for calculation is a reference value and does not equate with the minimum, average or real life time.

Material composition

The following chart outlines the overall material composition of the calculated reference product without packaging. Product weight of 0.05 kg adds up with packaging weight of 0.01 kg to a total weight of 0.06 kg. Packaging consists of: Corrugated box (average composition), Graphic paper.

Product Weight 0.05 kg

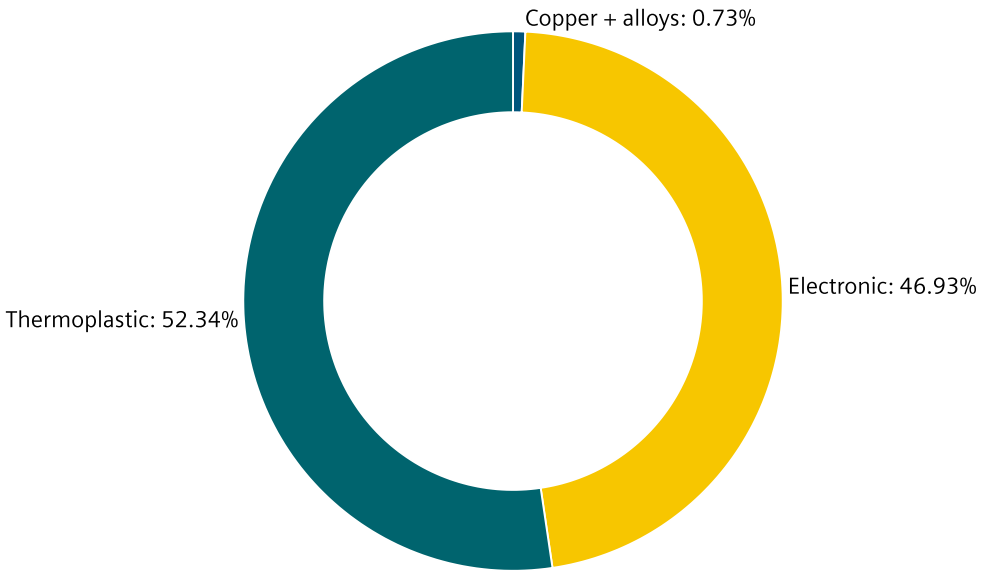

Substance assessment

At Siemens, we are committed to the development and production of environmentally sound and sustainably produced equipment. This includes avoiding hazardous substances in our products without compromising their benefits for our customers. Please visit the following website to learn more about how we comply with product-related environmental regulations like RoHS, REACH, WEEE and others: Product Related Environmental Protection

Life cycle stages and reference scenarios

Manufacturing

This stage covers the extraction of natural resources, production of raw materials, manufacturing, packaging, and transportation.

Distribution and Operation

This stage covers the product's distribution, installation, use, and maintenance. Different operating conditions can lead to deviations from the reference scenario.

End-of-Life

This stage covers the disassembly or shredding and material recycling of all recyclable materials, as well as energy recovery, thermal treatment and the disposal of all other materials.

Scenarios

Energy model used:
Germany (renewable mix), Germany (Thermal energy from natural gas)

Transportation model:
Truck-trailer (GLO), 34-40t gross weight, 3500 km default distance

Energy model used:
Europe (standard mix);

Distribution scenario:
Truck-trailer (34-40 t) 3500 km

Use Scenario:
1.5 W full load, 100% service uptime: reference lifetime 10 years

Energy model used:
EMEA

End-of-Life methodology:
Modeled according to Cut-off methodology.

Key environmental performance indicators

The following impact categories characterize the product's environmental footprint. They have been calculated with LCIA methodology EN15804+A2 (EF 3.1); LCA tool: Green Digital Twin Version 4.0, Database: One Siemens LCA Database (based on Sphera MLC CUP 2024.1).

To ensure the high quality and completeness of the LCA results, primary data have been used whenever possible. Datasets for resources, such as electrical energy or natural gas, are chosen from the region where the device is produced and assembled. If primary data are not available, datasets reflecting state-of-the-art manufacturing technology are considered.

Impact Category	Unit	Total	Manufacturing	Distribution	Operation	End of life
Climate change – total	kg CO_2 eq	4.27E+1	4.64E+0	2.44E-2	3.80E+1	5.33E-2
Climate change – fossil	kg CO_2 eq	4.21E+1	4.36E+0	1.68E-2	3.76E+1	5.32E-2
Climate change – biogenic	kg CO_2 eq	6.22E-1	2.76E-1	6.71E-3	3.39E-1	2.28E-5
Climate Change, land use and land use change	kg CO_2 eq	1.03E-2	4.34E-3	2.79E-4	5.73E-3	2.33E-6
Ozone depletion	kg CFC-11 eq	2.20E-9	1.35E-9	3.45E-15	8.54E-10	5.98E-14
Acidification	Mole of H+ eq	1.21E-1	4.87E-2	2.48E-5	7.26E-2	1.54E-5
Eutrophication, freshwater	kg P eq	3.07E-4	1.50E-4	7.53E-8	1.57E-4	1.68E-7
Eutrophication, marine	kg N eq	2.29E-2	4.73E-3	9.05E-6	1.81E-2	4.91E-6
Eutrophication, terrestrial	Mole of N eq	2.36E-1	4.58E-2	1.07E-4	1.90E-1	6.27E-5
Photochemical ozone formation, human health	kg NMVOC eq	6.18E-2	1.39E-2	2.49E-5	4.79E-2	1.33E-5
Resource use, mineral and metals	kg Sb eq	3.52E-4	3.45E-4	1.46E-9	7.04E-6	5.09E-10
Resource use, fossils	MJ	8.45E+2	5.65E+1	2.21E-1	7.88E+2	6.43E-2
Water use	m^3 world eq deprived water	1.13E+1	1.00E+0	1.11E-3	1.03E+1	5.33E-3
Particulate matter	Disease incidences	1.06E-6	4.57E-7	2.40E-10	6.06E-7	1.14E-10
Ionising radiation, human health	kBq U235 eq	2.09E+1	2.49E-1	7.54E-5	2.07E+1	1.39E-3
Ecotoxicity, freshwater – total	CTUe	2.60E+2	3.09E+1	1.63E-1	2.28E+2	2.86E-2
Human toxicity, cancer – total	CTUh	1.51E-8	2.23E-9	3.34E-12	1.28E-8	1.39E-12
Human toxicity, non-cancer – total	CTUh	2.94E-7	9.75E-8	1.49E-10	1.97E-7	2.75E-11
Land Use	dimensionless (pt)	3.63E+2	2.93E+1	1.08E-1	3.34E+2	2.50E-2

Climate change

This chart shows the overall impact of the product on climate change – total. The operations phase is the life cycle phase with the biggest overall impact. Different operating conditions can lead to deviations from the reference scenario.

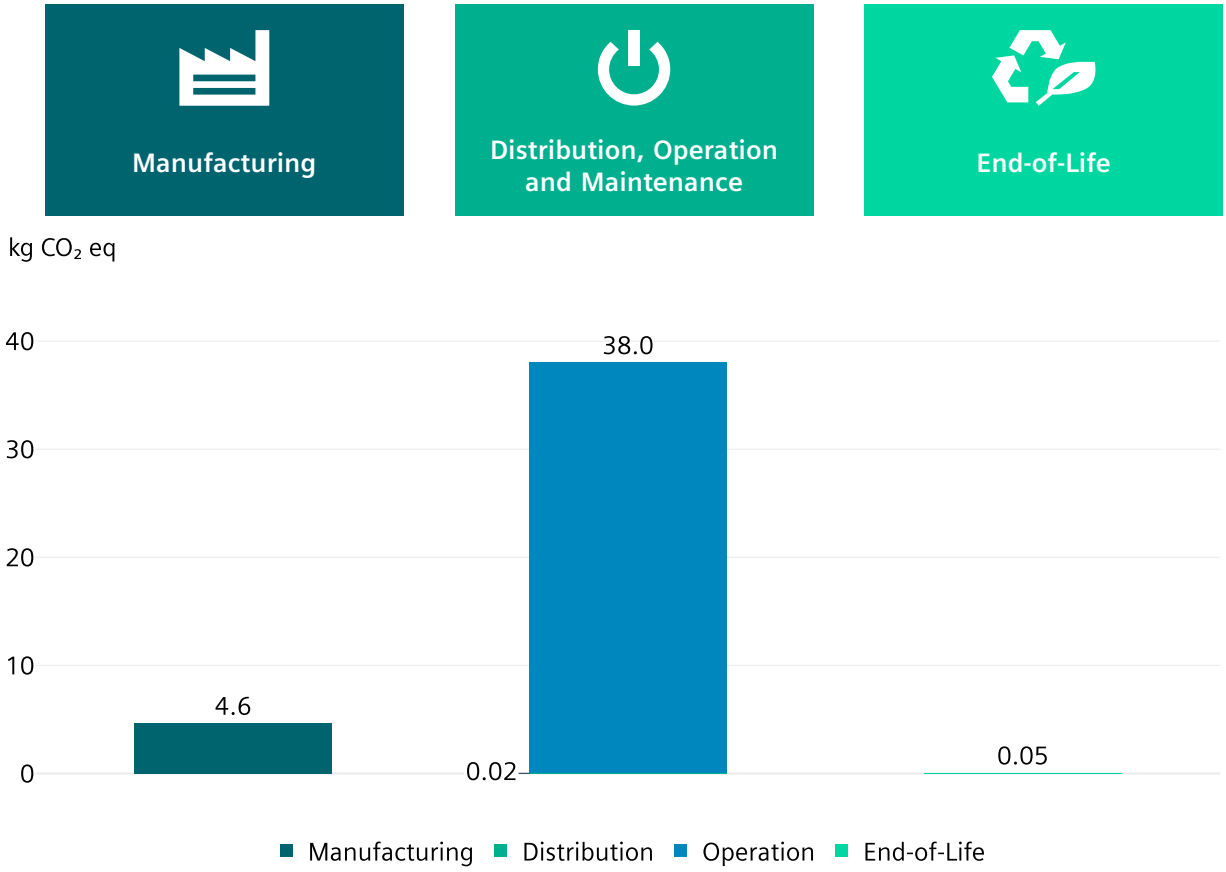

End-of-Life results

The end-of-life stage was modelled by shredding of the device, followed by sorting and material separation process.The end-of-life parameters are calculated according to IEC TR 62635.

It leads to:

- **product recyclability of up to 24%** mainly due to metal content
- **energy recoverability of up to 55%** from plastic materials
- **minimum disposal rate of 21%**

The exact final values depend on the used recycling process and add up to 100%.

Note: The device should not be disposed of as unsorted municipal waste. Special treatment for specific components may be mandated by law or recommended for environmental reasons. Observe all local and applicable laws.

Legal Disclaimer

This Environmental Product Declaration (EPD) is for information purposes only. It is based upon the standards mentioned above. This EPD does not warrant or guarantee the composition of a product or that the product will retain a particular composition for a particular period. Therefore, all warranties, representations, conditions, and all other terms of any kind whatsoever implied by statute or common law are – to the fullest extent permitted by applicable law – excluded.

Siemens therefore does not assume any liability for any error or for any consequence which may arise from the use of this information to the maximum extent under the law.

Please be aware that the data of this EPD cannot be compared with data calculated based upon product category rules (PCRs) other than the standards mentioned above. The values given are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Published by

Siemens AG

Digital Industries

Process Automation

Östliche Rheinbrückenstr. 50

76167 Karlsruhe

Deutschland