


Myriad V IP65 White Bezel

MYRIAD IP65 3000K DALI WHITE
2049537



Product features

- MYRIAD IP65 3000K DALI WHITE

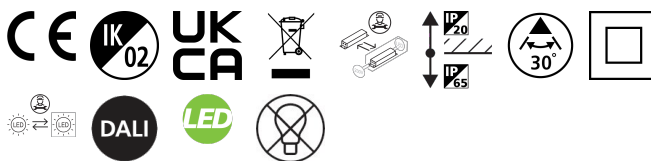

PRODUCT OVERVIEW

Product name	MYRIAD IP65 3000K DALI WHITE
Technology	LED
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462015
E-number Norway	3290232
Warranty	5 years
Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimming method	DALI
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495375

DATA TABLE

General data

Product name	MYRIAD IP65 3000K DALI WHITE
--------------	------------------------------

Myriad V IP65 White Bezel

MYRIAD IP65 3000K DALI WHITE

2049537

Technology	LED
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462015
E-number Norway	3290232
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimming method	DALI
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Length (mm)	76
Nominal Product Width (mm)	76
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76
Cutout Dimensions (W x L in mm or Diameter in mm)	75

Myriad V IP65 White Bezel


MYRIAD IP65 3000K DALI WHITE
2049537

Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495375
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

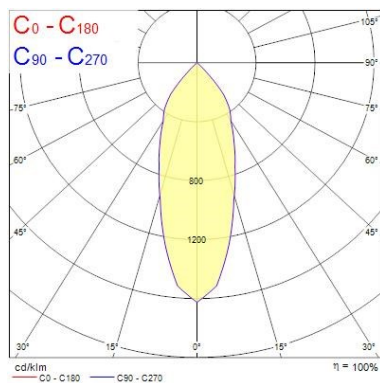

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.33	37.0°	8948
1.0	0.67	37.0°	2237
1.5	1.00	37.0°	972
2.0	1.34	37.0°	614
2.5	1.67	37.0°	387
3.0	2.01	37.0°	248

TECHNICAL DRAWINGS

