


Sylvania Granit 0-10V
Granit IP65 0-10V 19000lm 840 WB
0039596

Product features

- Integrated LED highbay; Black aluminium housing; 19500Lm; 135 W; 144 Lm/W; 4000K; Drive current: 540mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 321 x 169 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.

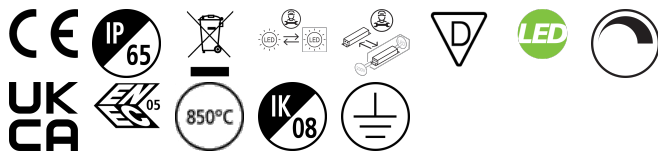

PRODUCT OVERVIEW

Product name	Granit IP65 0-10V 19000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357006
Warranty	5 years
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	135
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Dimming method	0-10V
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08


Sylvania Granit 0-10V

Granit IP65 0-10V 19000lm 840 WB
0039596


Product EAN number

5410288395968


PHOTOMETRY




0.5	0.76 0.76	E(0°) E(90°) E(180°)	1180 1180 1180
1.0	1.51 1.51	E(0°) E(90°) E(180°)	1231 1231 1231
1.5	2.27 2.27	E(0°) E(90°) E(180°)	896 1512 1512
2.0	3.03 3.03	E(0°) E(90°) E(180°)	523 881 881
2.5	3.79 3.79	E(0°) E(90°) E(180°)	326 444 444
3.0	4.54 4.54	E(0°) E(90°) E(180°)	1424 278 278





0.5	0.80 0.80	E(0°) E(90°) E(180°)	8676 1810 10712
1.0	1.60 1.60	E(0°) E(90°) E(180°)	1496 343 343
1.5	2.39 2.39	E(0°) E(90°) E(180°)	631 1912 1912
2.0	3.19 3.19	E(0°) E(90°) E(180°)	350 881 881
2.5	3.99 3.99	E(0°) E(90°) E(180°)	2272 544 544
3.0	4.79 4.79	E(0°) E(90°) E(180°)	1575 381 381



0.5	0.86 0.86	E(0°) E(90°) E(180°)	5409 1180 1180
1.0	1.72 1.72	E(0°) E(90°) E(180°)	1382 292 292
1.5	2.58 2.58	E(0°) E(90°) E(180°)	611 1512 1512
2.0	3.44 3.44	E(0°) E(90°) E(180°)	381 881 881
2.5	4.30 4.30	E(0°) E(90°) E(180°)	236 544 544
3.0	5.16 5.16	E(0°) E(90°) E(180°)	183 323 323



0.5	0.80 0.80	E(0°) E(90°) E(180°)	5894 1382 1382
1.0	1.60 1.60	E(0°) E(90°) E(180°)	1424 343 343
1.5	2.39 2.39	E(0°) E(90°) E(180°)	632 1912 1912
2.0	3.19 3.19	E(0°) E(90°) E(180°)	389 881 881
2.5	3.99 3.99	E(0°) E(90°) E(180°)	2275 544 544
3.0	4.79 4.79	E(0°) E(90°) E(180°)	1580 378 378



TECHNICAL DRAWINGS

Sylvania Granit 0-10V

Granit IP65 0-10V 19000lm 840 WB

0039596

