

Beacon LED Muse II
BEACON LED MUSE II 97CRI 4000K L3 TRAILING EDGE WHITE
2059751



Product features

- Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1150lm, luminaire efficacy: 55lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg.




PRODUCT OVERVIEW

Product name	BEACON LED MUSE II 97CRI 4000K L3 TRAILING EDGE WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
E-number FI	4274055
Warranty	5 years
Fixture luminous flux (lm)	623/1150
Luminaire efficacy (lm/W)	55
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Product Voltage (V)	240
Electrical protection	Class II
Dimmable	Yes
Dimming method	Other
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597512

PHOTOMETRY

Beacon LED Muse II

BEACON LED MUSE II 97CRI 4000K L3 TRAILING EDGE WHITE
2059751

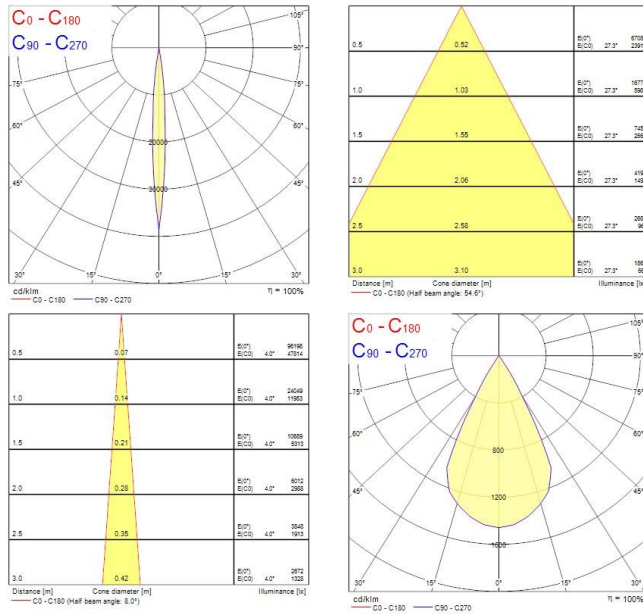

TECHNICAL DRAWINGS

