


Raiden 12KLM

Raiden IP66 12KLM 840 Asymmetric Wide DALI
2824094



Product features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, DALI dimmable, 12100lm, 90W, 134lm/W, CRI80, Asymmetric Wide beam angle 110*50°, 100000 hrs L90B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.2kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

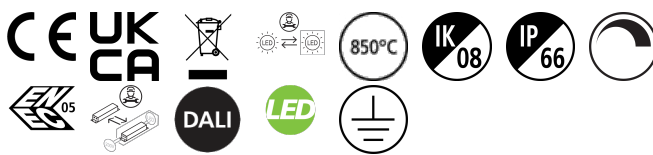


PRODUCT OVERVIEW

Product name	Raiden IP66 12KLM 840 Asymmetric Wide DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	12100
Luminaire efficacy (lm/W)	134
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110*50
Photobiological Risk Group	RG1
Total power consumption (W)	90
Electrical protection	Class I
Dimmable	Yes
Dimming method	DALI-2
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768240944

PHOTOMETRY

Raiden 12KLM

Raiden IP66 12KLM 840 Asymmetric Wide DALI
2824094



TECHNICAL DRAWINGS

