

PRODUCT DATASHEET

ST R39 25 36 ° 1.5 W/2700 K E14

LED STAR R39 | LED reflector lamps R39 with retrofit screw base



Areas of application

- Shops and exhibition rooms
- Domestic applications
- Commercial applications
- Accent lighting
- Outdoor use in suitable outdoor luminaires only

Product benefits

- Quick, simple and safe replacement without rewiring
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp
- Low maintenance costs thanks to long lifetime
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time

Product features

- LED alternative to high voltage halogen lamps
- High color consistency: ≤ 6 SDCM
- Not dimmable
- Base: E14
- Lamp made of glass
- Good quality of light; color rendering index $R_a: \geq 80$
- Lifetime: up to 15,000 h



TECHNICAL DATA**Electrical data**

Nominal wattage	1.5 W
Construction wattage	1.50 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	25 W
Nominal current	12 mA
Type of current	AC
Inrush current	9.6 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp no. on circuit break. 10 A (B)	350
Max. lamp no. on circuit break. 16 A (B)	562
Power factor λ	0.40

Photometrical data


Luminous intensity	248 cd
Luminous flux	110 lm
Nominal useful luminous flux 90°	110 lm
Luminous efficacy	73 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	80
Light color	827
Standard deviation of color matching	≤ 6 sdcn
Rated peak intensity	248 cd
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	0.1
Stroboscope effect metric (SVM)	0.1



Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	36.00 °

Dimensions & Weight

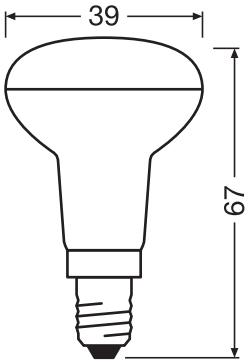

Overall length	70.00 mm
Diameter	39.00 mm
Maximum diameter	39 mm
Product weight	35.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	42 °C

Lifespan

Lifespan	15000 h
----------	---------

Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

Dimmable	No
----------	----

Certificates & Standards

Energy efficiency class	F ¹⁾
Energy consumption	2.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC
Photobiological safety group acc. to EN62778	RG1

¹⁾ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

Country-specific categorizations

Order reference	LEDSR392536 1,5
-----------------	-----------------

Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	DLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E14
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No

Correlated colour temperature type	SINGLE_VALUE
Standby power	0 W
Networked standby power for CLS	0 W
Claim of equivalent power	Yes
Length	70.00 mm
Height	39.00 mm
Width	39.00 mm
Chromaticity coordinate x	0.455
Chromaticity coordinate y	0.405
R9 Colour rendering index	1
Beam angle correspondence	NARROW_CONE_90
Survival factor	0,9
Displacement factor	0,50
LED light source replaces a fluorescent light source	No
EPREL ID	1403191,522928
Model number	AC32659,AC24571

DOWNLOAD DATA

Documents and certificates	
	Declarations Of Conformity CE
Photometric and lighting design files	
	Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075433243	Folding box 1	49 mm x 49 mm x 95 mm	43.00 g	0.23 dm ³
4058075616394	Shipping box 6	168 mm x 111 mm x 71 mm	335.00 g	1.32 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For further products and actual information concerning LED lamps see www.osram-lamps.com/led-lamps

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.