


PRODUCT DATASHEET

HALOLINE 750 W 230 V R7S

HALOLINE® Standard | Double ended halogen lamps with tube base

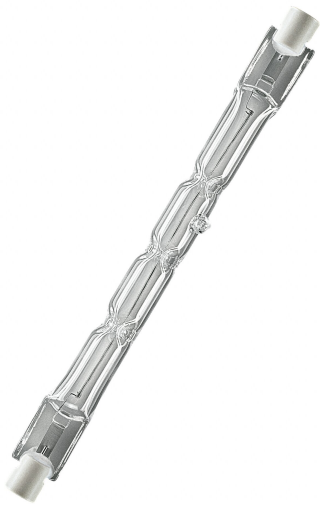

Areas of application

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

Product benefits

- Brilliant accent light
- No transformer required
- Contains no mercury

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 3,000 K
- Burning position: p15

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

TECHNICAL DATA

Electrical data

Nominal wattage	780 W
Construction wattage	780.00 W
Nominal voltage	230 V

Photometrical data

Luminous flux	16080 lm
Luminous efficacy	20 lm/W
Light color (designation)	Warm White
Color temperature	2900 K
Color rendering index Ra	100
Light color	1029
UV protection	No



Light technical data

Starting time	0 s
Rated beam angle (half peak value)	360.00 °

Dimensions & Weight

Overall length	185.70 mm
Diameter	12 mm
Product weight	16.7 g

Lifespan

Lifespan	2000 h
----------	--------

Additional product data

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

Mercury-free	Yes
Design / version	Tube
Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 / For outdoor applications and operation in damp locations special approved fixtures are required

Capabilities

Dimmable	Yes
Burning position	p15

Certificates & Standards

Energy efficiency class	G
Energy consumption	780.00 kWh/1000h

Country-specific categorizations

ILCOS	HDG-750-230-R7s-191,1
Order reference	64560 780W 230V

Energy labelling regulation data acc EU 2019/2015

Lighting technology used	OTHER
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	R7s
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Claim of equivalent power	No
Length	191.10 mm
Height	12 mm
Width	12 mm
Chromaticity coordinate x	0.444
Chromaticity coordinate y	0.406
Beam angle correspondence	SPHERE_360
EPREL ID	714424

Model number	AC35326
--------------	---------

DOWNLOAD DATA

Photometric and lighting design files	
	Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300004167	Folding box 1	238 mm x 26 mm x 30 mm	24.20 g	0.19 dm³
4050300223933	Shipping box 12	245 mm x 85 mm x 112 mm	353.40 g	2.33 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

choose one

Professional

Country

Deutsch

[myLEDVANCE](#)