

COPPER-BONDED GROUND ROD, THREADED, 3/4" DIA, 10', 10 MIL PLATING, 12.5 LB

CATALOG NUMBER

633400



CERTIFICATIONS



FEATURES

Cold-rolled threads with continuous, unbroken grain flows preserve copper coating and are stronger than cut threads

99.9% pure electrolytic copper coating

Rods have a high carbon steel core and tip that provide superior strength when driving

Copper coating will not crack when bent or tear when driven

Minimum copper coating of 10 mils on rods listed to UL® 467

nVent ERICO name, length, diameter and part number is roll-stamped within 12" (304,8 mm) of chamfered end

UL logo and control number where applicable stamped on each rod for easy inspection after installation

PRODUCT ATTRIBUTES

Material: Copper-Bonded Steel

Tensile Strength: 552 MPa Min

Thread Location: Pointed and Chamfered Ends

Ground Rod Diameter, Nominal: 3/4"

Ground Rod Diameter, Actual: 17.3 mm

Thread Size: 3/4" UNC

Length: 3 m

Plating Thickness: 254 µm

Unit Weight: 5.700 kg


Complies With: ANSI®/NEMA® GR1;IEC® EN 62561-2

ADDITIONAL PRODUCT DETAILS

For rods to be listed to UL® 467, they must be at least 8' (2.44 m) in length.

IEC® EN 62561-2 supercedes EN 50164-2.

DIAGRAMS

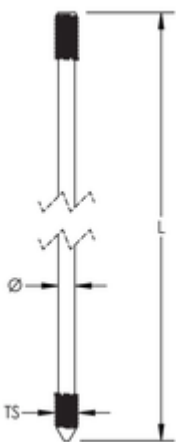

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠ WARNING: This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm.- For more information go to-www.P65Warnings.ca.gov.

Noord-Amerika

+1.800.753.9221

Optie 1 - de Zorg van de Klant

Optie 2 - Technische Steun

Europa

Nederland:

+31 800-0200135

Frankrijk:

+33 800 901 793

Europa

Duitsland:

800 1890272

Andere Landen:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Onze krachtige portefeuille van merken:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© nVent 2022. Alle nVent tekens en emblemen worden bezeten of door de nVent Diensten GmbH of zijn filialen vergunning gegeven. Alle andere handelsmerken zijn het bezit van hun respectieve eigenaars.

nVent reserves het recht specificaties zonder bericht te veranderen.