




Category (ETIM):	Suspended luminaire
Type:	visula-VSHIMP LED
Order number:	43251026675
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	67
Luminaire luminous flux (lm):	6100
lm/W:	90
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<3000, F, Indoor, CE
Colour of the housing:	aluminium natural anodized
Weight (net) (kg):	7.9
Dimensions LxWxDxH (mm):	1480 x 330 x 30
mounting method:	Suspended single mounting
EAN-number:	4020863304509
Commodity code:	94051098

visula-VSHIMP/1500 LED 6100lm 840 • aen
• DALI • 43251026675



Lighting technology

Diffuser, micro-prismatic-direct/indirect distribution
VSHIMP/1500 LED 6100 lm 840

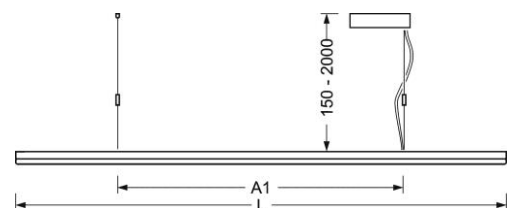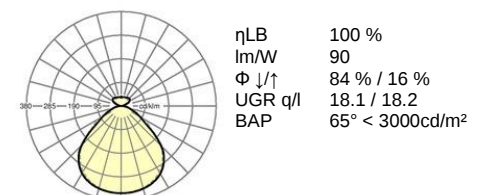

Suspended luminaire; Ultra-flat luminaire housing, extruded aluminium profile, naturally anodised, visible installation height 30 mm; end faces and side parts made of naturally anodised aluminium with continuous longitudinal groove, rounded towards the bottom of the luminaire. Housing colour aluminium natural anodized; Direct/indirect light distribution, direct component using microprism made of PMMA, homogeneous light emission through lateral LED light coupling and overlying aluminium reflector with highly reflective white coating, with micro-perforation for the indirect light component; for workstations, omnidirectional glare suppression according to the current DIN-EN 12464-1 standard. Integrated LED driver design. Electrical connection via integrated transparent connection cable 5 x 0.75 mm², length 2,300 mm, stripped cable ends. Suspension included

Dimensions LxWxDxH (mm): 1480 x 330 x 30
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 6100
lm/W: 90
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 67
Energy efficiency class: A+
Certifications: IP 20, protection class I, BAP 65°<3000, F, Indoor, CE

Regiolux GmbH
Type: visula-VSHIMP/1500 LED 6100 840 DALI aen
Article number: 43251026675
Product deep link: <http://www.regiolux.de/en/article/43251026675>
5 year guarantee after registration on website.