


Category (ETIM):	Mounted luminaire
Type:	stail-SAX LED
Order number:	60323026660
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	42
Luminaire luminous flux (lm):	4000
lm/W:	96
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, BAP 65°<1500, F, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	4.2
Dimensions LxWxH/DxH (mm):	1540 x 151 x 56
Cable entry KE X/Y (mm):	0 / 30
mounting method:	Surface single mounting, Surface light run mounting, Mounting rail mounting
EAN-number:	4020863307142
Commodity code:	94051098

stail-SAX/1500-1 LED 4000lm 840 • vw • DALI • 60323026660




Lighting technology

Micro-parabolic louvre, silky matt-direct distribution
SAX/1500-1 LED 4000 lm 840

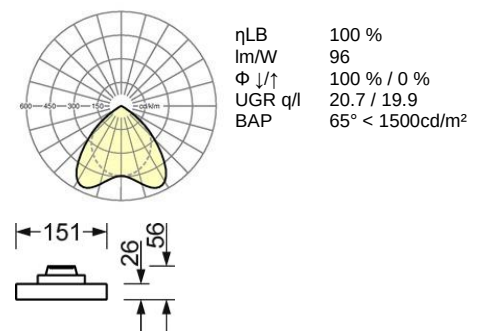

Mounted luminaire; Sheet steel housing, flat rectangular cross section, visible installation height 26 mm with 30 mm clearance from the ceiling; end faces made of steel; Housing colour traffic white RAL 9016; Direct light distribution using reflectivity-enhanced parabolic aluminium louvre, silk matt with low installation height cross blades, for workstations, omnidirectional glare reduction according to the current DIN-EN 12464-1 standard, self-engaging. Electrical connection and connection of control cable using 5-pole connection terminal with plug-in contacts.

Dimensions LxWxH/DxH (mm): 1540 x 151 x 56
Cable entry KE X/Y (mm): 0 / 30
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4000
lm/W: 96
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 42
Energy efficiency class: A+
Certifications: IP 20, protection class I, BAP 65°<1500, F, Indoor, CE



Regiolux GmbH
Type: stail-SAX/1500-1 LED 4000 840 DALI vw
Article number: 60323026660
Product deep link: <http://www.regiolux.de/en/article/60323026660>
5 year guarantee after registration on website.