


Category (ETIM):	Device mounts
Type:	Device mount IP20-SDGLB LED
Order number:	18314306600
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	32
Luminaire luminous flux (lm):	4900
lm/W:	153
Ambient temperatures:	10°C / 45°C
Certifications:	IP 20, protection class I, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	1.818
Dimensions LxWxH/DxH (mm):	1531 x 63 x 46
mounting method:	Mounting rail system mounting
EAN-number:	4020863336852
Commodity code:	94051098

SDGLB LED 4900lm 840 • vw • DALI • 18314306600



Lighting technology
Linear.Lens.Profil-direct wide distribution
SDGLB LED 4900 lm 840

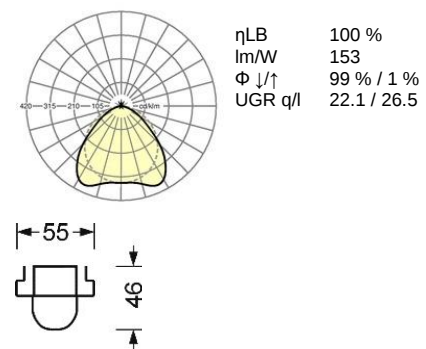

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated lateral lever locks. LED unit in housing length for optically seamless light run. Housing colour traffic white RAL 9016; Direct, wide light distribution using Linear.Lens.Profil made of matt PMMA plastic. Optically seamless light run. Heat-resistant cables including fixed 5-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 63 x 46
Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra>80; LED service life 50000h L80/B10
Luminaire luminous flux (lm): 4900
lm/W: 153
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 32
Conditions: Suitable for use in ambient temperatures of 10°C to 45°C
Certifications: IP 20, protection class I, F, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGLB LED 4900 840 DALI vw
Article number: 18314306600
Product deep link: <http://www.regiolux.de/de/article/18314306600>
5 year guarantee after registration on website.