


Datasheet


REGIOLUX

Category (ETIM):	Sports hall luminaire
Type:	THL-THLA LED
Order number:	68110016600
Configuration:	Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	43
Luminaire luminous flux (lm):	4900
lm/W:	114
Energy efficiency class:	A+
Certifications:	IP 20, protection class I, F, Tennis ball impact resistance, Protection against flying balls, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	9.55
Dimensions LxWxH/DxH (mm):	1548 x 184 x 90
Cable entry KE X/Y (mm):	0 / 70
mounting method:	Surface single mounting, Surface light run mounting, Suspended single mounting, Suspended / light run mounting
EAN-number:	4020863281411
Commodity code:	94051098


THLA/1500-1 LED 4900lm 840 • vw • DALI • 68110016600

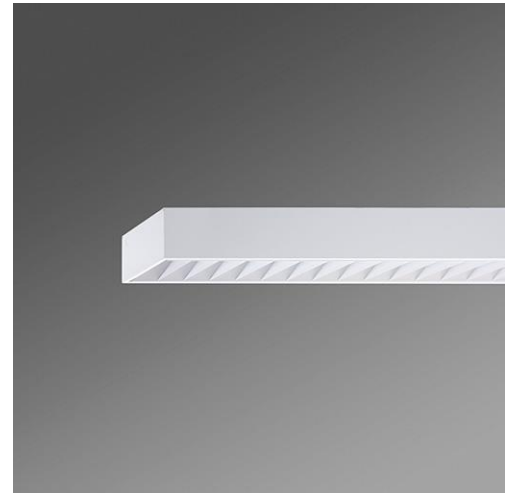

Lighting technology
 Louvre, white-direct wide distribution
 THLA/1500-1 LED 4900 lm 840



ηLB	100 %
lm/W	114
Φ ↓/↑	100 % / 0 %
UGR q/l	19.2 / 19.5



Sports hall luminaire; Sheet steel housing Housing colour traffic white RAL 9016; Direct wide-beam light distribution using sheet steel metal louvre with robust smooth cross blades; painted white similar to RAL 9016; with V reflector, can be folded down on one side; ball-proof. Louvre fastening using ball-proof spring catches that can only be opened with tools; fitted with 1x Regiolux LED unit, neutral white light colour (840) with very good colour consistency and high colour rendering Ra>80; Electrical connection via 5-pole connection terminal with plug-in contacts. The accessories for suspended mounting installation must be ordered separately.

Dimensions LxWxH/DxH (mm): 1548 x 184 x 90
 Cable entry KE X/Y (mm): 0 / 70
 Configuration: Lamps integrated: LED, Light colour 840/neutral white (4000K), Colour rendering Ra=80; LED service life 50000h L80/B10
 Luminaire luminous flux (lm): 4900
 lm/W: 114
 Operating device: Electronic driver DALI (1 pcs.)
 System performance (W): 43
 Energy efficiency class: A+
 Certifications: IP 20, protection class I, F, Tennis ball impact resistance, Protection against flying balls, Indoor, CE

Regiolux GmbH
 Type: THLA/1500-1 LED 4900 840 DALI vw
 Article number: 68110016600
 Product deep link: <http://www.regiolux.de/en/article/68110016600>
 5 year guarantee after registration on website.

