



Overload relay 0.1...0.4 A Electronic For motor protection Size S00, Class 5...30 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset Internal ground fault detection

product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB3

General technical data

size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	0.1 W
per pole	0.03 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
- between auxiliary and auxiliary circuit - between auxiliary and auxiliary circuit - between main and auxiliary circuit - between main and auxiliary circuit	300 V 300 V 600 V 690 V
shock resistance	15g / 11 ms
according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
thermal current	0.4 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
reference code according to IEC 81346-2	F
Substance Prohibition (Date)	10/01/2009

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
- during operation - during storage - during transport	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
temperature compensation	-25 ... +60 °C
relative humidity during operation	10 ... 95 %

Main circuit

number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	0.1 ... 0.4 A
operating voltage	
- rated value - for remote-reset function at DC	690 V 24 V

• at AC-3e rated value maximum operating frequency rated value operational current rated value operational current at AC-3e at 400 V rated value operating power • for 3-phase motors at 400 V at 50 Hz • for AC motors at 500 V at 50 Hz • for AC motors at 690 V at 50 Hz	690 V 50 ... 60 Hz 0.4 A 0.4 A 0.04 ... 0.09 kW 0.04 ... 0.12 kW 0.06 ... 0.18 kW
Auxiliary circuit	
design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V	integrated 1 for contactor disconnection 1 for message "tripped" 0 4 A 4 A 4 A 4 A 3 A 2 A 0.55 A 0.3 A 0.3 A 0.11 A
Protective and monitoring functions	
trip class design of the overload release response value current of the grounding protection minimum response time of the grounding protection in settled state operating range of the grounding protection relating to current set value • minimum • maximum	CLASS 5E, 10E, 20E and 30E adjustable electronic 0.75 x IMotor 1 000 ms IMotor > lower current setting value IMotor < upper current setting value x 3.5
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL	0.4 A 0.4 A B600 / R300
Short-circuit protection	
design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 35 A, RK5: 3 A gG: 4 A fuse gG: 6 A
Installation/ mounting/ dimensions	
mounting position fastening method height width depth	any Contactor mounting 79 mm 45 mm 73 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	Yes screw-type terminals screw-type terminals Top and bottom

circuit	
type of connectable conductor cross-sections	
- for main contacts — solid — solid or stranded — finely stranded with core end processing - at AWG cables for main contacts	1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 4 mm ²) 1x (0,5 ... 4 mm ²), 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 4 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (20 ... 12), 2x (20 ... 12)
type of connectable conductor cross-sections	
- for auxiliary contacts — solid — solid or stranded — finely stranded with core end processing - at AWG cables for auxiliary contacts	1x (0.5 ... 4 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (0,5 ... 4 mm ²), 2x (0,5 ... 2,5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 14), 2x (20 ... 14)
tightening torque	
- for main contacts with screw-type terminals - for auxiliary contacts with screw-type terminals	0.8 ... 1.2 N·m 0.8 ... 1.2 N·m
design of screwdriver shaft	
size of the screwdriver tip	
design of the thread of the connection screw	
- for main contacts - of the auxiliary and control contacts	M3 M3
Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Communication/ Protocol	
type of voltage supply via input/output link master	No
Electromagnetic compatibility	
conducted interference	
due to burst according to IEC 61000-4-4	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
due to conductor-earth surge according to IEC 61000-4-5	2 kV (line to earth) corresponds to degree of severity 3
due to conductor-conductor surge according to IEC 61000-4-5	1 kV (line to line) corresponds to degree of severity 3
due to high-frequency radiation according to IEC 61000-4-6	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Display	
display version for switching status	Slide switch
Certificates/ approvals	
General Product Approval	
EMC	
  Confirmation   	
For use in hazardous locations	
Declaration of Conformity	
Test Certificates	
Marine / Shipping	
   Special Test Certificate Type Test Certificates/Test Report 	
Marine / Shipping	



other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3113-4RB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3113-4RB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3113-4RB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3113-4RB0&lang=en



Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3113-4RB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3113-4RB0&objecttype=14&gridview=view1>

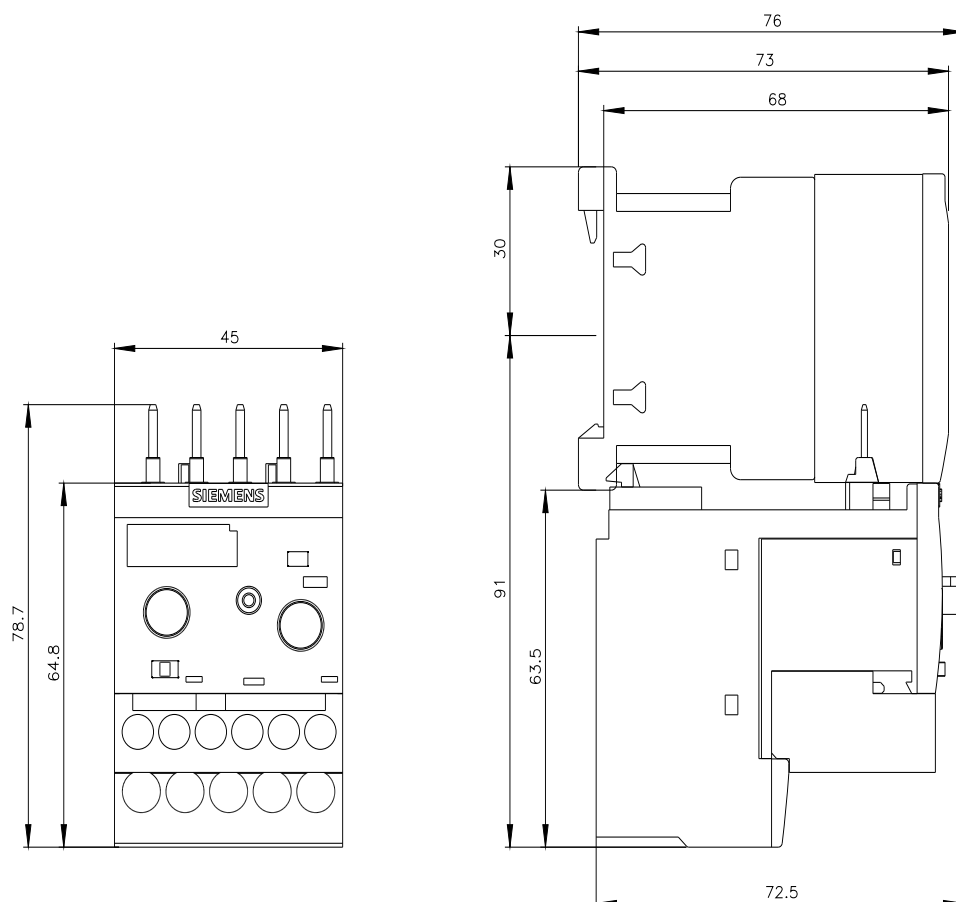

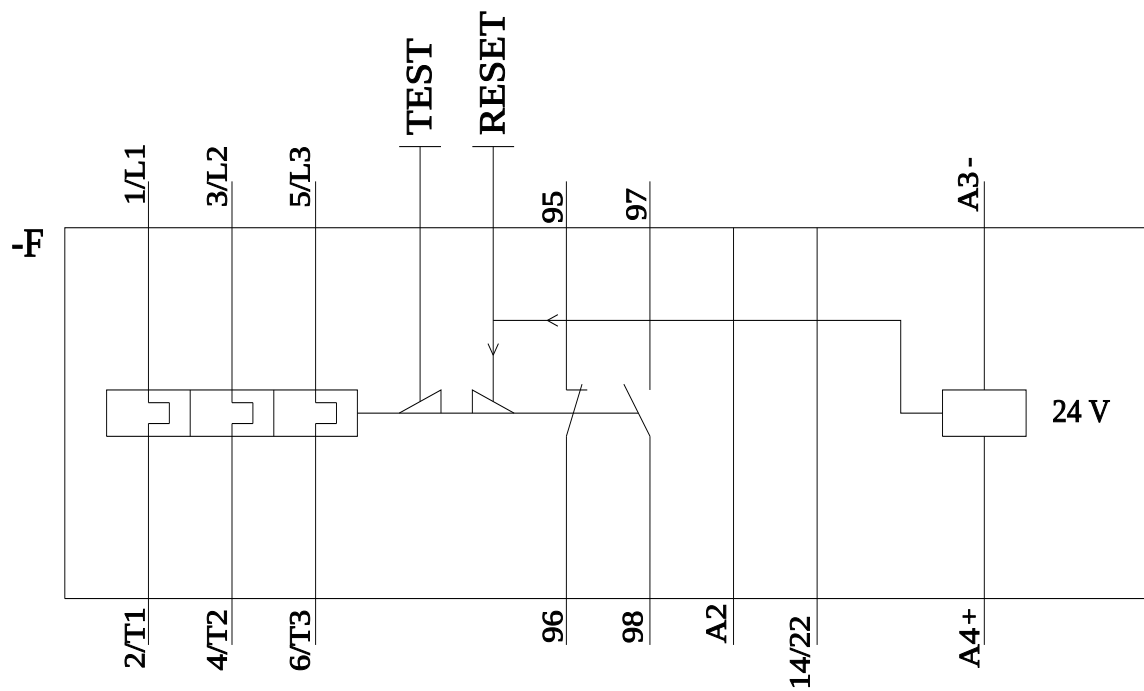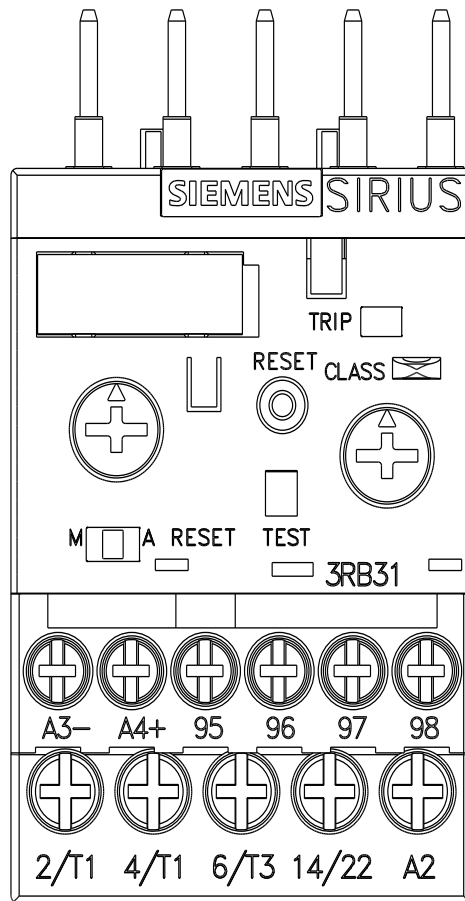

last modified:

2/9/2022