



SIRIUS soft starter 200-690 V 77 A, 24 V AC/DC Screw terminals

product brand name

product category

product designation

product type designation

manufacturer's article number

- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFINET high-feature usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of circuit breaker usable at 400 V at inside-delta circuit
- of circuit breaker usable at 500 V at inside-delta circuit
- of the gG fuse usable up to 690 V
- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

SIRIUS

Hybrid switching devices

Soft starter

3RW55

[3RW5980-0HF00](#)

[3RW5980-0CS00](#)

[3RW5950-0CH00](#)

[3RW5980-0CP00](#)

[3RW5980-0CT00](#)

[3RW5980-0CR00](#)

[3RW5980-0CE00](#)

[3VA2110-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10](#)

[3VA2110-7MN32-0AA0: Type of coordination 1, Iq = 20 kA, CLASS 10](#)

[3VA2216-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10](#)

[3VA2216-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10](#)

[3NA3132-6: Type of coordination 1, Iq = 65 kA](#)

[3NA3132-6: Type of coordination 1, Iq = 65 kA](#)

[3NE1224-0: Type of coordination 2, Iq = 65 kA](#)

[3NE3227: Type of coordination 2, Iq = 65 kA](#)

General technical data

starting voltage [%]

20 ... 100 %

stopping voltage [%]

50 %; non-adjustable

start-up ramp time of soft starter

0 ... 360 s

ramp-down time of soft starter

0 ... 360 s

start torque [%]

10 ... 100 %

stopping torque [%]

10 ... 100 %

torque limitation [%]

20 ... 200 %

current limiting value [%] adjustable

125 ... 800 %

breakaway voltage [%] adjustable

40 ... 100 %

breakaway time adjustable

0 ... 2 s

number of parameter sets

3

accuracy class according to IEC 61557-12

5 %

certificate of suitability

- CE marking
- UL approval

Yes

Yes

• CSA approval	Yes
product component	Yes
• HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	3
number of controlled phases	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
trip class	10 ... 60 %
current unbalance limiting value [%]	10 ... 95 %
ground-fault monitoring limiting value [%]	
buffering time in the event of power failure	
• for main current circuit	100 ms
• for control circuit	100 ms
idle time adjustable	0 ... 255 s
insulation voltage rated value	690 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	8 kV
blocking voltage of the thyristor maximum	1 800 V
service factor	1.15
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	690 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 ... 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/15/2018
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• breakaway pulse	Yes
• adjustable current limitation	Yes
• creep speed in both directions of rotation	Yes
• pump ramp down	Yes
• DC braking	Yes
• motor heating	Yes
• slave pointer function	Yes
• trace function	Yes
• intrinsic device protection	Yes
• motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
	Yes; Type A PTC or Klixon / Thermoclick
• evaluation of thermistor motor protection	Yes; Only up to 600 V operating voltage
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes
• communication function	Yes
• operating measured value display	Yes
• event list	Yes
• error logbook	Yes
• via software parameterizable	Yes
• via software configurable	Yes
• screw terminal	Yes
• spring-loaded terminal	No
• PROFInergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules
• firmware update	Yes
• removable terminal for control circuit	Yes
• voltage ramp	Yes
• torque control	Yes
• combined braking	Yes
• analog output	Yes; 4 ... 20 mA (default) / 0 ... 10 V
• programmable control inputs/outputs	Yes
• condition monitoring	Yes

• automatic parameterisation	Yes
• application wizards	Yes
• alternative run-down	Yes
• emergency operation mode	Yes
• reversing operation	Yes
• soft starting at heavy starting conditions	Yes

Power Electronics

operational current

• at 40 °C rated value	77 A
• at 40 °C rated value minimum	16 A
• at 50 °C rated value	68 A
• at 60 °C rated value	62 A

operational current at inside-delta circuit

• at 40 °C rated value	133 A
• at 50 °C rated value	118 A
• at 60 °C rated value	107 A

operating voltage

• rated value	200 ... 690 V
• at inside-delta circuit rated value	200 ... 600 V

relative negative tolerance of the operating voltage

-15 %

relative positive tolerance of the operating voltage

10 %

relative negative tolerance of the operating voltage at inside-delta circuit

-15 %

relative positive tolerance of the operating voltage at inside-delta circuit

10 %

operating power for 3-phase motors

• at 230 V at 40 °C rated value	22 kW
• at 230 V at inside-delta circuit at 40 °C rated value	37 kW
• at 400 V at 40 °C rated value	37 kW
• at 400 V at inside-delta circuit at 40 °C rated value	75 kW
• at 500 V at 40 °C rated value	45 kW
• at 500 V at inside-delta circuit at 40 °C rated value	90 kW
• at 690 V at 40 °C rated value	75 kW

Operating frequency 1 rated value

50 Hz

Operating frequency 2 rated value

60 Hz

relative negative tolerance of the operating frequency

-10 %

relative positive tolerance of the operating frequency

10 %

minimum load [%]

10 %; Relative to set I_e

power loss [W] for rated value of the current at AC

• at 40 °C after startup	23 W
• at 50 °C after startup	20 W
• at 60 °C after startup	19 W

power loss [W] at AC at current limitation 350 %

• at 40 °C during startup	1 083 W
• at 50 °C during startup	921 W
• at 60 °C during startup	814 W

type of the motor protection

Electronic, tripping in the event of thermal overload of the motor

Control circuit/ Control

type of voltage of the control supply voltage

AC/DC

control supply voltage at AC

• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V

relative negative tolerance of the control supply voltage at AC at 50 Hz

-20 %

relative positive tolerance of the control supply voltage at AC at 50 Hz

20 %

relative negative tolerance of the control supply voltage at AC at 60 Hz

-20 %

relative positive tolerance of the control supply voltage at AC at 60 Hz

20 %

control supply voltage frequency

50 ... 60 Hz

relative negative tolerance of the control supply voltage frequency

-10 %

relative positive tolerance of the control supply voltage frequency

10 %

control supply voltage	
• at DC rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	440 mA
holding current in bypass operation rated value	870 mA
locked-rotor current at close of bypass contact maximum	6.3 A
inrush current peak at application of control supply voltage maximum	7.5 A
duration of inrush current peak at application of control supply voltage	20 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply

Inputs/ Outputs

number of digital inputs	4
• parameterizable	4
• number of digital outputs	4
• number of digital outputs parameterizable	3
• number of digital outputs not parameterizable	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A

Installation/ mounting/ dimensions

mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	306 mm
width	185 mm
depth	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
weight without packaging	7.15 kg

Connections/ Terminals

type of electrical connection	
• for main current circuit	box terminal
• for control circuit	screw-type terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm² maximum	50 m
• with conductor cross-section = 1.5 mm² maximum	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
• for main contacts for box terminal using the front clamping point solid	1x (2.5 ... 16 mm²)
• for main contacts for box terminal using the front clamping point finely stranded with core end processing	1x (2.5 ... 50 mm²)
• for main contacts for box terminal using the front clamping point stranded	1x (10 ... 70 mm²)
• at AWG cables for main contacts for box terminal using the front clamping point	1x (10 ... 2/0)
• for main contacts for box terminal using the back clamping point solid	1x (2.5 ... 16 mm²)
• at AWG cables for main contacts for box terminal using the back clamping point	1x (10 ... 2/0)
• for main contacts for box terminal using both	2x (2.5 ... 16 mm²)

clamping points solid - for main contacts for box terminal using both clamping points finely stranded with core end processing - for main contacts for box terminal using both clamping points stranded - for main contacts for box terminal using the back clamping point finely stranded with core end processing - for main contacts for box terminal using the back clamping point stranded	2x (2.5 ... 35 mm ²) 2x (6 ... 16 mm ²), 2x (10 ... 50 mm ²) 1x (2.5 ... 50 mm ²) 1x (10 ... 70 mm ²)
type of connectable conductor cross-sections - for control circuit solid - for control circuit finely stranded with core end processing - at AWG cables for control circuit solid	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 12), 2x (20 ... 14)
wire length - between soft starter and motor maximum - at the digital inputs at DC maximum	800 m 1 000 m
tightening torque - for main contacts with screw-type terminals - for auxiliary and control contacts with screw-type terminals	4.5 ... 6 N·m 0.8 ... 1.2 N·m
tightening torque [lbf·in] - for main contacts with screw-type terminals - for auxiliary and control contacts with screw-type terminals	40 ... 53 lbf·in 7 ... 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum ambient temperature - during operation - during storage and transport	2 000 m; Derating as of 1000 m, see catalog -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above -40 ... +80 °C
environmental category - during operation according to IEC 60721 - during storage according to IEC 60721 - during transport according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A
EMC emitted interference	
Communication/ Protocol	
communication module is supported - PROFINET standard - PROFINET high-feature - EtherNet/IP - Modbus RTU - Modbus TCP - PROFIBUS	Yes Yes Yes Yes Yes Yes
UL/CSA ratings	
manufacturer's article number of circuit breaker - usable for Standard Faults at 460/480 V according to UL - usable for High Faults at 460/480 V according to UL - usable for Standard Faults at 460/480 V at inside-delta circuit according to UL - usable for High Faults at 460/480 V at inside-delta circuit according to UL - usable for Standard Faults at 575/600 V according to UL - usable for High Faults at 575/600 V at inside-delta circuit according to UL - usable for Standard Faults at 575/600 V at inside-delta circuit according to UL of the fuse - usable for Standard Faults up to 575/600 V	Siemens type: 3VA51, max. 125 A; I _q = 10 kA Siemens type: 3VA51, max. 125 A; I _q max = 65 kA Siemens type: 3VA51, max. 125 A; I _q = 10 kA Siemens type: 3VA51, max. 125 A; I _q max = 65 kA Siemens type: 3VA51, max. 125 A; I _q = 10 kA Siemens type: 3VA51, max. 125 A; I _q max = 65 kA Siemens type: 3VA51, max. 125 A; I _q = 10 kA Type: Class RK5 / K5, max. 250 A; I _q = 10 kA

according to UL
 — usable for High Faults up to 575/600 V according to UL
 — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
 — usable for High Faults at inside-delta circuit up to 575/600 V according to UL

operating power [hp] for 3-phase motors

- at 200/208 V at 50 °C rated value
- at 220/230 V at 50 °C rated value
- at 460/480 V at 50 °C rated value
- at 575/600 V at 50 °C rated value
- at 200/208 V at inside-delta circuit at 50 °C rated value
- at 220/230 V at inside-delta circuit at 50 °C rated value
- at 460/480 V at inside-delta circuit at 50 °C rated value
- at 575/600 V at inside-delta circuit at 50 °C rated value

contact rating of auxiliary contacts according to UL

Type: Class J / L, max. 250 A; Iq = 100 kA
 Type: Class RK5 / K5, max. 250 A; Iq = 10 kA
 Type: Class J / L, max. 250 A; Iq = 100 kA
 20 hp
 25 hp
 50 hp
 60 hp
 30 hp
 40 hp
 75 hp
 100 hp
 R300-B300

Safety related data

protection class IP on the front according to IEC 60529

IP00; IP20 with cover

touch protection on the front according to IEC 60529
electromagnetic compatibility

finger-safe, for vertical contact from the front with cover
 acc. to IEC 60947-4-2

ATEX

certificate of suitability

- ATEX
- IECEx
- according to ATEX directive 2014/34/EU

Yes
 Yes
 BVS 18 ATEX F 003 X

type of protection according to ATEX directive 2014/34/EU

II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]

hardware fault tolerance according to IEC 61508 relating to ATEX

0

PFDavg with low demand rate according to IEC 61508 relating to ATEX

0.008

PFHD with high demand rate according to EN 62061 relating to ATEX

5E-7 1/h

Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX

SIL1

T1 value for proof test interval or service life according to IEC 61508 relating to ATEX

3 y

Certificates/ approvals

General Product Approval

EMC



[Confirmation](#)



For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)



Marine / Shipping

other

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5526-1HA06>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5526-1HA06>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5526-1HA06>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5526-1HA06&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5526-1HA06/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5526-1HA06&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

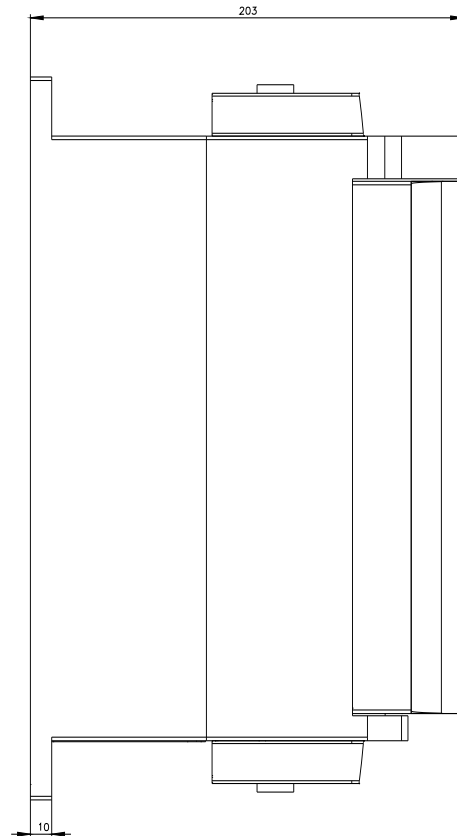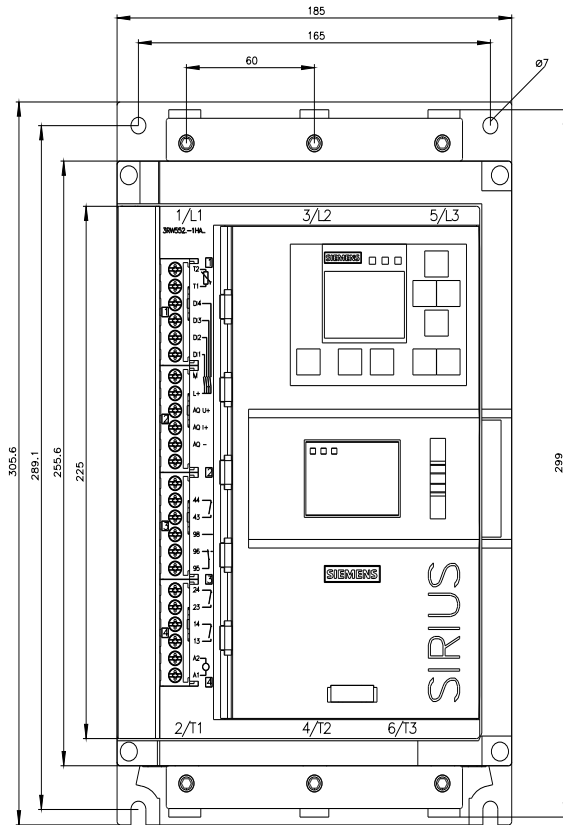

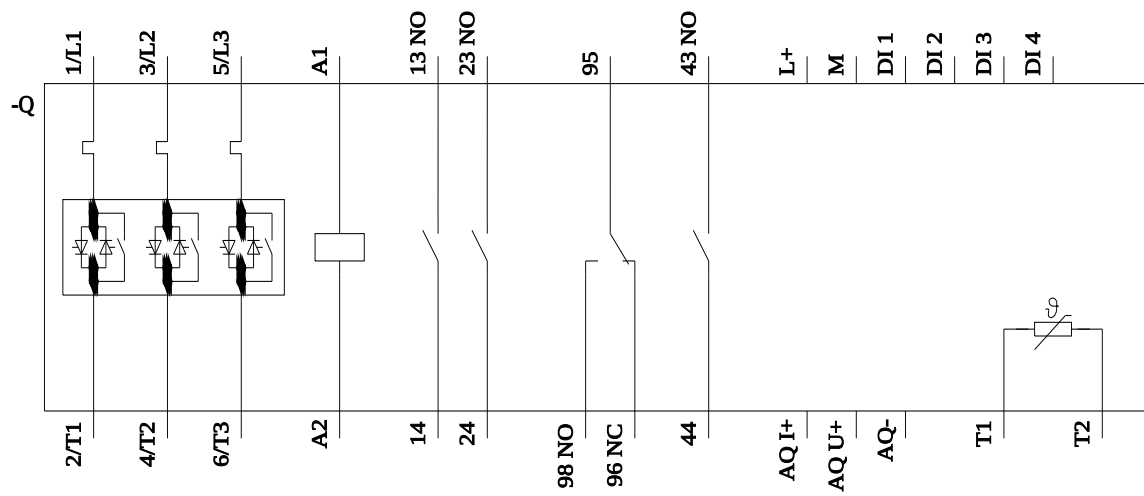

last modified:

10/11/2022 

