



Base unit (BU30-MS4) For ET 200SP motor starter Without infeed

product brand name	SIMATIC
product category	Accessories
product designation	BaseUnit
design of the product	Without feed in
product type designation	ET 200SP

General technical data

insulation voltage rated value	500 V
degree of pollution	2
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	500 V
shock resistance	6g / 11 ms
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	04/15/2016

Safety related data

protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe

Main circuit

number of poles for main current circuit	3
type of voltage of the operating voltage	AC
operating voltage rated value	500 V
operational current at AC at 400 V rated value	32 A; Derating, see Manual

Inputs/ Outputs

number of digital inputs	0
--------------------------	---

Supply voltage

type of voltage of the supply voltage	DC
supply voltage 1 at DC rated value	24 V
• minimum permissible	20.4 V
• maximum permissible	28.8 V
ampacity maximum	7 A

Installation/ mounting/ dimensions

mounting position	vertical, horizontal
fastening method	standard rail
height	215 mm
width	30 mm
depth	75 mm
required spacing with side-by-side mounting	
• upwards	50 mm
• downwards	50 mm

Ambient conditions	
installation altitude at height above sea level maximum	4 000 m; For derating see manual
ambient temperature	
• during operation	-25 ... +60 °C; For derating see manual
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
environmental category during operation according to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	900 ... 1 060 hPa

Connections/ Terminals	
type of electrical connection	
• for main current circuit	spring-loaded terminals (push-in)
• for auxiliary and control circuit	spring-loaded terminals (push-in)
type of connecting terminal	Push-in terminal
type of connectable conductor cross-sections for load-side outgoing feeder	
• solid	1x 0,5 ... 2,5 mm ²
• finely stranded without core end processing	1x 0,5 ... 2,5 mm ²
• finely stranded with core end processing	1x 0,5 ... 2,5 mm ²
type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder	1x 20 ... 12
shape of the screwdriver tip	Slot
size of the screwdriver tip	Standard screwdriver 0.6 mm x 3.5 mm

Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



[Confirmation](#)



Test Certificates	Marine / Shipping	other
-------------------	-------------------	-------

[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-0AP00-0DP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-0AP00-0DP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-0AP00-0DP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-0AP00-0DP0&lang=en

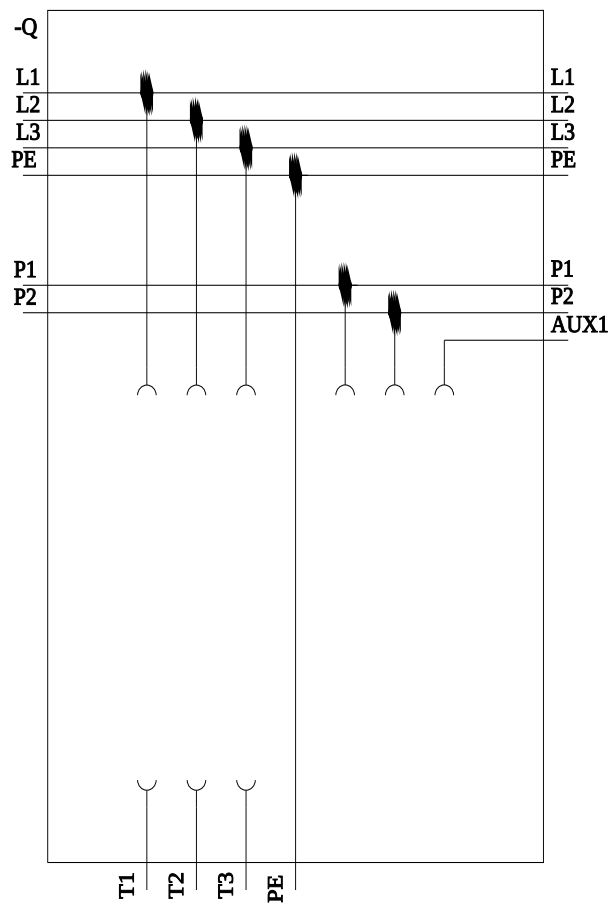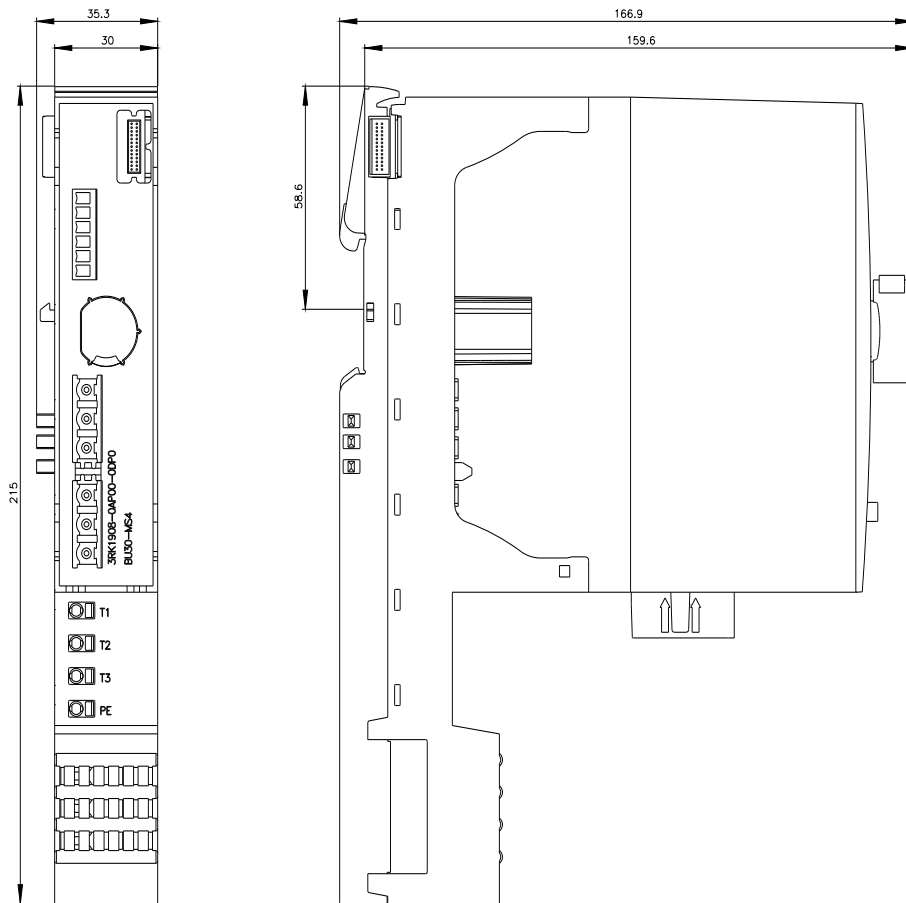

last modified:

12/16/2020

