



Sample image

Datasheet

Article number: 70010220

Designation: KG41.T203/33.KL11V

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
690 AC					
Rated uninterrupted current Iu/Ith					
Current (A)	Ambient temperature (°C)	Peak temperature (°C) additional requirements			
40	50	55 Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie					
Utilization category		Voltage (V)		Current (A)	
AC-32A		20 - 400		40	
Rated operational power					
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3	220 - 240	3	3	7,50	
AC-3	380 - 440	3	3	11	
AC-3	660 - 690	3	3	11	
AC-23A	220 - 240	3	3	7,50	
AC-23A	380 - 440	3	3	15	
AC-23A	660 - 690	3	3	15	
Max. Fuse rating IEC					
Fuse characteristic			No. of Fuses	Current (A)	
gG			1	50	
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C) Additional Text			
42		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	2	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	7,50	40
DOL	440 - 480	1	2	10	40
DOL	550 - 600	1	2	10	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	15	40
DOL	440 - 480	3	3	25	40
DOL	550 - 600	3	3	30	40
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 60A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)		Current (A) Text			
60 - 75		-- --			
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	42	1	1	1
AC	600	42	1	2	1
AC	600	42	3	3	1
General Information					
Text					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					

General Information
Text

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA
Nominal Voltage

Voltage (V) AC / DC
600 AC

Rated insulation voltage Ui

Voltage (V) AC / DC
600 AC

Rated thermal current

Current (A) Ambient temperature (°C) Additional Text
40 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	2	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	7,50	40
DOL	440 - 480	1	2	10	40
DOL	550 - 600	1	2	10	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	15	40
DOL	440 - 480	3	3	25	40
DOL	550 - 600	3	3	30	40

Temp. rating of wire

Temperature rating (°C) Current (A) Text
75 -- --

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	40	1	1	1
AC	600	40	1	2	1
AC	600	40	3	3	1

GENERAL TECHNICAL INFORMATION
Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	2	0.75mm²	Copper
solid wire	Min.	1	1.5mm²	Copper
flexible wire	Max.	1	AWG 6	Copper
flexible wire	Min.	1	2.5mm²	Copper
flexible wire	Max.	1	10mm²	Copper
flexible wire	Min.	2	1.5mm²	Copper
Single-core or stranded wire	Max.	1	AWG 6	Copper
Single-core or stranded wire	Max.	1	16mm²	Copper
flexible wire with sleeve	Max.	1	10mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0.75mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	1.5mm²	Copper

Stripping length

Length (mm) --


Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm) tightening torque (lb-in)
1,80 16

Approbations

Specification	Marking
EAC	
CE marking	
UK Directives	
CSA C.22.2 No.14	
GB/T14048.3	

General Information
Text

- EMC Note: This device is suitable for use in environment A and B.

General Information

Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-KL11V

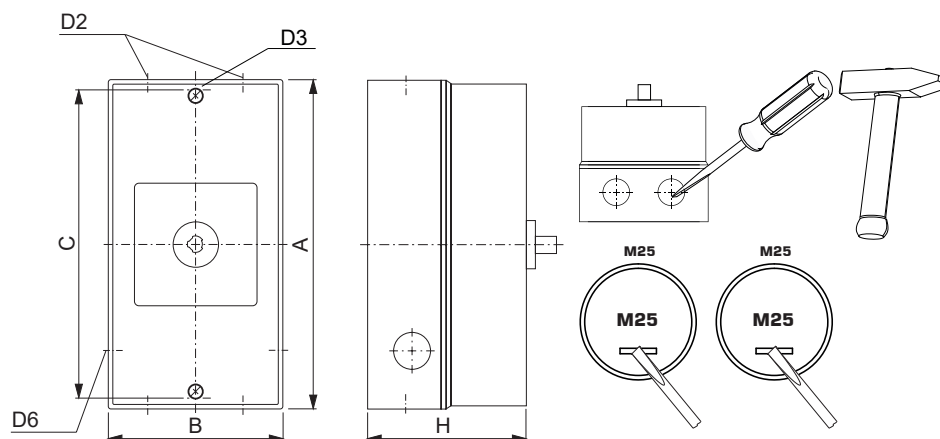

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	190,00 mm
B	H	100,00 mm
C	H	178,00 mm
D2	Ø	4,00 x M25
D3	Ø	5,60 mm
D6	Ø	2,00 x M25
H	H	93,00 mm



Wiring diagram

KG41.T303.KL11V



Switch program

KG41.T303.KL11V



Kraus & Naimer

KG41
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0	■	■	■					
	90								
	180								

Version: 102

Face plate

S1.F656/E10.V9

