



Sample image

Datasheet

Article number: 70024027

Designation: CA11.A292*NLB402.PF1


Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
690 AC / DC					
Rated uninterrupted current Iu/Ith					
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements		
20	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C		
Rated operational current Ie					
Utilization category		Voltage (V)		Current (A)	
AC-15		220 - 240		6	
AC-15		380 - 440		4	
Rated operational power					
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3	220 - 240	3	3	3	
AC-3	380 - 440	3	3	5,50	
AC-3	660 - 690	3	3	5,50	
AC-3	220 - 240	1	2	2,20	
AC-3	380 - 440	1	2	3	
AC-23A	220 - 240	3	3	3,70	
AC-23A	380 - 440	3	3	7,50	
AC-23A	660 - 690	3	3	7,50	
AC-23A	220 - 240	1	2	2,50	
AC-23A	380 - 440	1	2	3,70	
Max Fuse Rating IEC					
Fuse characteristic	No. of Fuses			Current (A)	
gG	1			25	
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C) Additional Text			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,17	40
Reversing	220 - 240	1	2	0,50	40
Reversing	277 - 277	1	2	0,60	40
Reversing	415 - 415	1	2	1	40
Reversing	440 - 480	1	2	1,50	40
Reversing	550 - 600	1	2	1,50	40
Reversing	110 - 120	3	3	0,50	40
Reversing	220 - 240	3	3	1	40
Reversing	415 - 415	3	3	2	40
Reversing	440 - 480	3	3	3	40
Reversing	550 - 600	3	3	3	40
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	415 - 415	3	3	5	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40

Pilot duty rating code								
Duty Code								
A600								
SCCR / Max. fuse rating								
Conditions of acceptability								
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.								
Temp. rating of wire								
Temperature rating (°C)			Current (A) Text					
60 - 75			– Use copper wire only					
Connecting instructions								
Markings								
When intended for use as a motor disconnect the device shall be provided with a method of being locked in the OFF-position.								
General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	600	20	1	2	1			
AC	600	20	3	3	1			
CSA								
Nominal Voltage								
			Voltage (V) AC / DC					
			600 AC					
Rated insulation voltage Ui								
			Voltage (V) AC / DC					
			600 AC					
Rated thermal current								
		Current (A)	Ambient temperature (°C)		Additional Text			
		20	0 - 40		–			
Horsepower rating								
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL				110 - 120	1	2	0,50	40
DOL				220 - 240	1	2	1	40
DOL				277 - 277	1	2	2	40
DOL				415 - 415	1	2	2	40
DOL				440 - 480	1	2	2	40
DOL				550 - 600	1	2	2	40
DOL				110 - 120	3	3	1,50	40
DOL				220 - 240	3	3	3	40
DOL				415 - 415	3	3	5	40
DOL				440 - 480	3	3	5	40
DOL				550 - 600	3	3	5	40
Pilot duty rating code								
Duty Code								
A600								
Temp. rating of wire								
			Temperature rating (°C)		Current (A) Text			
			75		– only			
General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	600	20	1	1	1			
GENERAL TECHNICAL INFORMATION								
Tightening torque of screws								
			tightening torque (Nm)			tightening torque (lb-in)		
			0,60			5		
Stripping length								
			Length (mm) –					
			8 STRIPPINGLENGTH					
Size of conductor								
composition of conductor		Min. / Max. value		No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire		Min.		1		0.5mm²		Copper
solid wire		Min.		2		0.5mm²		Copper
flexible wire		Min.		1		0.75mm²		Copper
flexible wire		Min.		2		0.75mm²		Copper
flexible wire		Max.		2		2.5mm²		Copper
flexible wire		Max.		2		AWG 14		Copper
Single-core or stranded wire		Max.		2		AWG 12		Copper
Single-core or stranded wire		Max.		2		2.5mm²		Copper
flexible wire with ferrule according to DIN 46228		Min.		1		0.5mm²		Copper
flexible wire with ferrule according to DIN 46228		Max.		2		2.5mm²		Copper
flexible wire with ferrule according to DIN 46228		Min.		2		0.5mm²		Copper
Approbations								
Specification								
Marking								
EAC								
CE marking								


Approbations	
Specification	Marking
UK Directives	UK CA
CSA C.22.2 No.14	CSA®
Recommended screw driver	
Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4
General Information	
Text	
- Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - Use copper wire only. Do not coat the wire end with tin. - Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications. - After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.	
Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com
Proposition 65	
Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

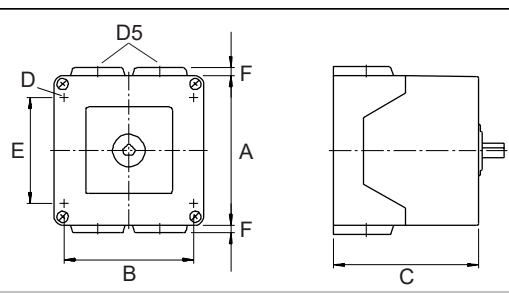Mounting-PF1	
	
IP - Code front side	IP65
Stages	1,00 - 2,00
A	□ 82,00 mm
B	H 68,00 mm
C	H 64,70 mm
D	Ø 4,40 mm
D5	Ø 4,00 x M20
E	H 52,00 mm
F	H 5,00 mm

Wiring diagram

CA11.A292.PF1

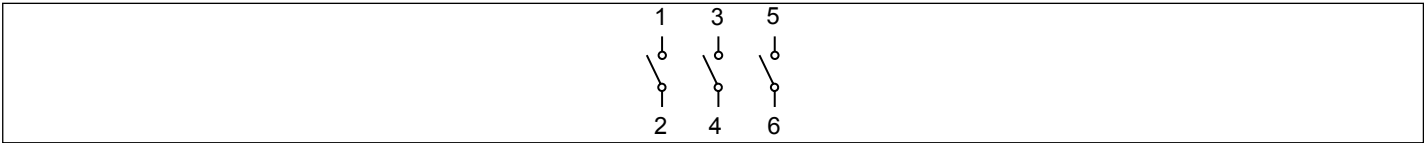

Switch program


CA11.A292.PF1



Kraus & Naimer

CA11	A292	Page 1 of 1
------	------	-------------

Face Plate



1	3	5	7	9	11	13	15	17	19	21	23
  											

Switching Angle 90

Total switching Angle 90

2	4	6	8	10	12	14	16	18	20	22	24
  											

Version: 86


09.01.2022 05:02 PM v3.9

<https://www.krausnaimer.com>

Page 5 of 7

Face plate

S1.F456/C10.V11H

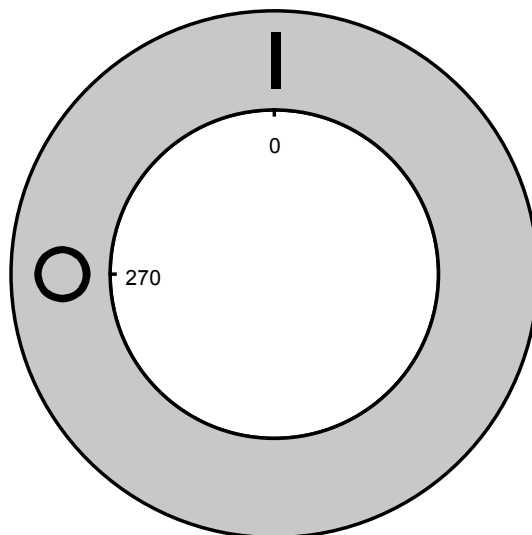



Sample image

PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/D61/C1


Colour of F-handle ring: "D" red

Colour of face ring: "6" yellow

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "C" for type of mounting PN, PF, PFA-PFF

Switch type: "1" for C-switches and for KG10.

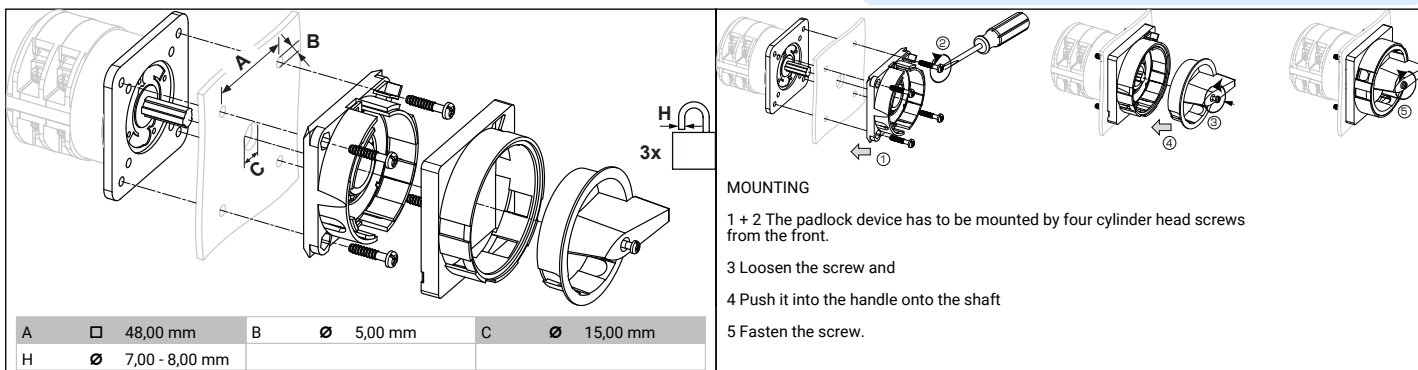


MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.

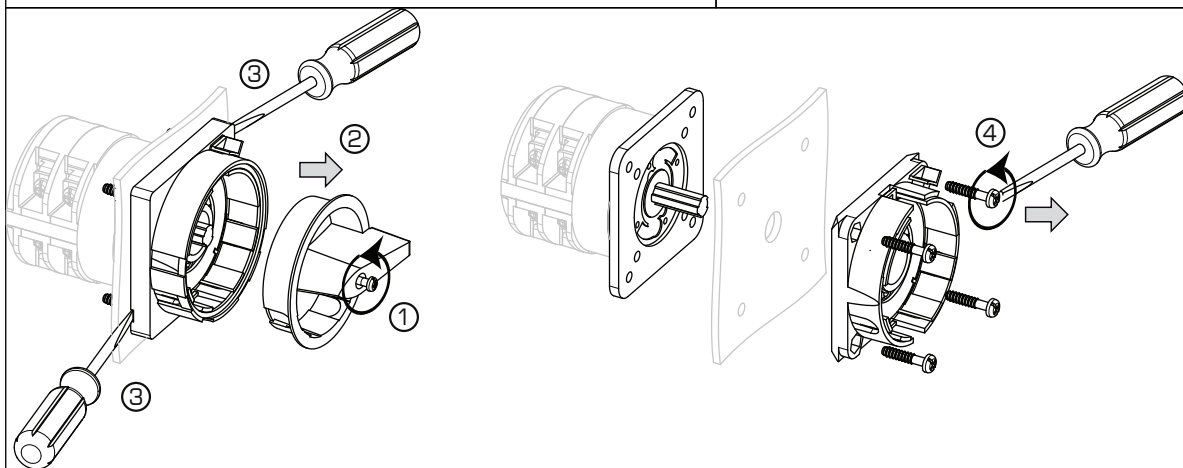

1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.