


Blacklight BL368 Linear T5
F8W T5 BL368
0000089



Product features

- Blacklight BL368 T5 UV-A lamp with spectral peak at 368nm



PRODUCT OVERVIEW

Product name	F8W T5 BL368
Technology	Special applications
Type	T5
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
E-number FI	4940422
Light colour	BL368 Blacklight
Product Voltage (V)	56
Dimmable	No
Dimming method	N/A
Average life (Nominal) (h)	10000
Product EAN number	5410288000893

DATA TABLE

General data	
Product name	F8W T5 BL368
Technology	Special applications
Type	T5
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
Operating temperature range (°C)	-15°C...+50°C
E-number FI	4940422
Optical data	
Ambient temperature for maximum luminous flux (°C)	25
Light colour	BL368 Blacklight

Blacklight BL368 Linear T5


F8W T5 BL368

0000089

Adjustable chromaticity	N
Electrical data	
Current (A)	0.145
Mains voltage (V)	230-240V
Product Voltage (V)	56
Control gear required	Yes
Transformer required	No
Dimmable	No
Dimming method	N/A
Lifetime data	
Average life (Nominal) (h)	10000
Physical data	
Nominal Product Length (mm)	300.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	288.3
Length base to pin Min-Max (mm) - B	293.0-295.4
Max. Lamp Length (mm) - C/L	302.5
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.023
Packaging	
Single packaging type	Carton
Product EAN number	5410288000893
Packaging single length / height (cm)	30.3
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
Units per outer package	25
Packaging outer width (cm)	11.0
Packaging outer depth (cm)	10.5
Safety data	
Lamp mercury content (mg)	2.30
Optimal operating condition (°C)	-15-50
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Flykilling - Insect attraction
Safety message	Not suitable for household

PHOTOMETRY

Blacklight BL368 Linear T5
F8W T5 BL368
0000089

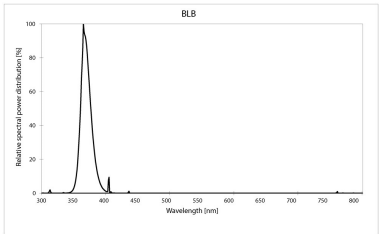

TECHNICAL DRAWINGS

