

Blacklight BL368 Linear T12
F20W T12 BL368 24
0000361



- Product features
- Blacklight BL368 Linear T12



PRODUCT OVERVIEW

Product name	F20W T12 BL368 24
Technology	Special applications
Type	T12
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
E-number FI	4940433
Light colour	BL368 Blacklight
Dimmable	No
Dimming method	N/A
Average life (Nominal) (h)	10000
Product EAN number	5410288003610

DATA TABLE

General data	
Product name	F20W T12 BL368 24
Technology	Special applications
Type	T12
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
Operating temperature range (°C)	-20°C...+40°C
E-number FI	4940433
Optical data	
Ambient temperature for maximum luminous flux (°C)	25
Light colour	BL368 Blacklight
Adjustable chromaticity	N
Electrical data	
Watt (Rated) - High frequency (W)	13.50

Blacklight BL368 Linear T12

F20W T12 BL368 24
0000361

Current (A)	0.37
Mains voltage (V)	230-240V
Control gear required	Yes
Transformer required	No
Dimmable	No
Dimming method	N/A

Lifetime data

Average life (Nominal) (h)	10000
----------------------------	-------

Physical data

Nominal Product Length (mm)	600.0
Nominal Product Diameter (mm)	38
Max. Length base to base (mm) - A	589.8
Length base to pin Min-Max (mm) - B	594.5-596.9
Max. Lamp Length (mm) - C/L	604.0
Max. Lamp Diameter (mm) - D	40.5
Weight (kg)	0.133


Packaging

Single packaging type	Carton
Product EAN number	5410288003610
Packaging single length / height (cm)	60.3
Packaging single width (cm)	4.3
Packaging single depth (cm)	4.1
Units per outer package	25
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	21.0

Safety data

Lamp mercury content (mg)	9.00
Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Flykilling - Insect attraction
Safety message	Not suitable for household

PHOTOMETRY

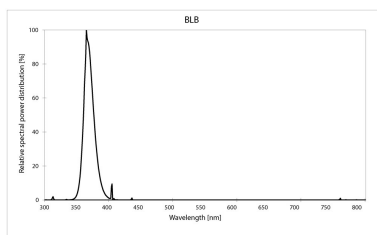

Blacklight BL368 Linear T12
F20W T12 BL368 24
0000361

TECHNICAL DRAWINGS

