

RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 360LM 865 36 SL

0029112



Product features

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp
- Recreates backlight effect similar to halogen dichroic lamps
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- COOLFIT functionality - ensures overheat and over temperature protection
- High switching cycles: >100,000
- High colour rendering: CRI80
- Non dimmable
- Warranty: 5 Years



PRODUCT OVERVIEW

Product name	RefLED Superia Retro ES50 V3 360LM 865 36 SL
Technology	LED
Watt (Rated) (W)	4
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
E-number FI	4741041
Warranty	5 years
Colour temperature (K)	6500
Light colour	Daylight
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288291123

DATA TABLE

General data

Product name	RefLED Superia Retro ES50 V3 360LM 865 36 SL
Technology	LED
Watt (Rated) (W)	4
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries

RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 360LM 865 36 SL

0029112

Operating temperature range (°C)	-20°C...+50°C
Performance ambient temperature Tq (°C)	25
E-number FI	4741041
Warranty	5 years

Optical data

Colour temperature (K)	6500
Light colour	Daylight
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	750
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Equivalent watt (W)	50
Product Voltage (V)	230
Control gear required	No
Transformer required	No
Dimmable	No
Inrush Current (A)	3.4
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A B Breaker	169

Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

Physical data

Nominal Product Diameter (mm)	50
Weight (kg)	0.05

Packaging


Single packaging type	Carton
Product EAN number	5410288291123
Packaging single length / height (cm)	8.2
Packaging single width (cm)	6.1
Packaging single depth (cm)	5.1
DUN14 (inner)	25410288291127
Units per inner package	6
Packaging inner length / height (cm)	9.2
Packaging inner width (cm)	16.4
Units per outer package	60
Packaging outer width (cm)	17.8

RefLED Superia Retro ES50
RefLED Superia Retro ES50 V3 360LM 865 36 SL
0029112


Packaging outer depth (cm) 68.5

Safety data	
Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Safety message	None

PHOTOMETRY

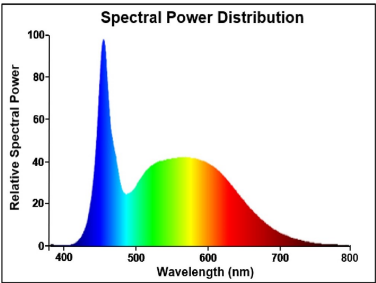

TECHNICAL DRAWINGS



RefLED Superia Retro ES50
RefLED Superia Retro ES50 V3 360LM 865 36 SL
0029112



SYLVANIA

0029112




4
kWh/1000h



RefLED Superia Retro ES50
RefLED Superia Retro ES50 V3 360LM 865 36 SL
0029112



0029112

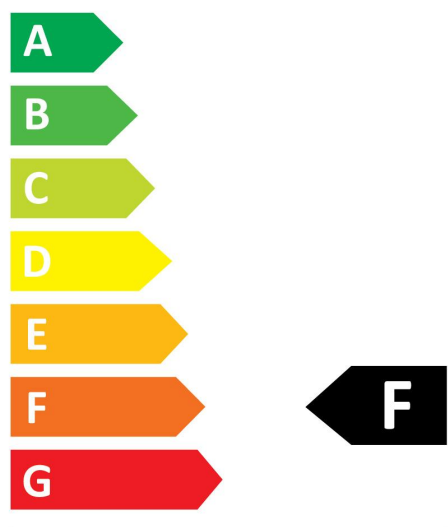

4
kWh/1000h



2019/2015