

RefLED ES50

RefLED ES50 V6 320LM 840 110 SL10

0029175



Product features

- Compact, energy efficient and exceptional value LED GU10 lamp
- Same shape and size as halogen GU10 lamp
- Compact Cluster SMD technology enabling high efficiency with halogen look
- Reduced visible heat sink from the front
- Available in 110 degree beam angle
- High lumen efficacy
- 15,000 hours average rated life
- 3 years warranty



PRODUCT OVERVIEW

Product name	RefLED ES50 V6 320LM 840 110 SL10
Technology	LED
Watt (Rated) (W)	4.2
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Warranty	3 years
Colour temperature (K)	4000
Light colour	Cool White
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Photobiological Risk Group	RG1
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288291758

DATA TABLE

General data

Product name	RefLED ES50 V6 320LM 840 110 SL10
Technology	LED
Watt (Rated) (W)	4.2
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail

RefLED ES50

RefLED ES50 V6 320LM 840 110 SL 10
0029175

Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Warranty	3 years

Optical data

Colour temperature (K)	4000
Light colour	Cool White
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	SDCM6
Luminous Intensity (cd)	170
Beam Angle (°)	110
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Equivalent watt (W)	45
Product Voltage (V)	230
Control gear required	No
Transformer required	No
Dimmable	No
Inrush Current (A)	3.9
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A B Breaker	74

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Diameter (mm)	50
Weight (kg)	0.35

Packaging

Single packaging type	Carton
Product EAN number	5410288291758
Packaging single length / height (cm)	8.2
Packaging single width (cm)	19.5
Packaging single depth (cm)	10.4
Units per outer package	6
Packaging outer width (cm)	40.3
Packaging outer depth (cm)	32.7


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable


RefLED ES50
RefLED ES50 V6 320LM 840 110 SL 10
0029175

Special purpose lamp	No
Dry applications use only	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

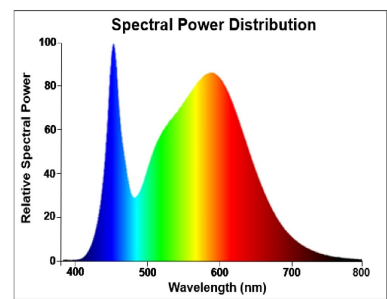


TECHNICAL DRAWINGS



RefLED ES50
RefLED ES50 V6 320LM 840 110 SL 10
0029175



0029175

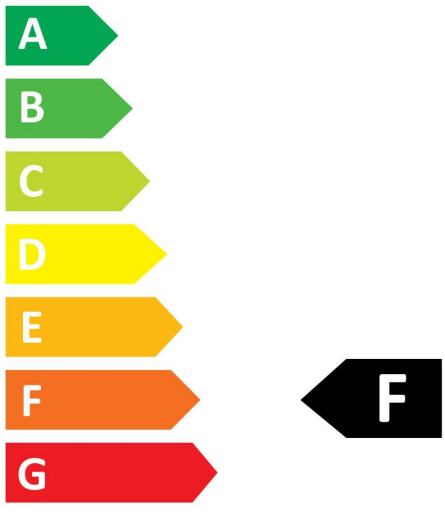

5
kWh/1000h




2019/2015

RefLED ES50
RefLED ES50 V6 320LM 840 110 SL 10
0029175



0029175

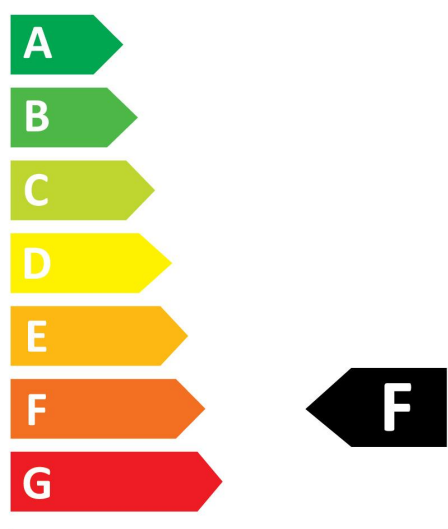

5
kWh/1000h

