

RANA LED Recessed 1200
RANA LED R 1200 HO 4K LOUV+PRI EM W GEN2
0052441



Product features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1196x296x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1130x165mm, Constant Current, Low LED flicker (+/-5%), Emergency 3 hours, Neutral White (4000K) LED Colour Temperature, 6000lm, 57W, 105lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.



PRODUCT OVERVIEW

Product name	RANA LED R 1200 HO 4K LOUV+PRI EM W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
Warranty	5 years
Fixture luminous flux (lm)	6000
Luminous flux (lm)	6000
Luminaire efficacy (lm/W)	105
Colour temperature (K)	4000
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	578
Total power consumption (W)	57
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524412

DATA TABLE

General data

Product name	RANA LED R 1200 HO 4K LOUV+PRI EM W GEN2
Technology	LED

RANA LED Recessed 1200

RANA LED R 1200 HO 4K LOUV+PRI EM W GEN2

0052441

Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	6000
Luminous flux (lm)	6000
Luminaire efficacy (lm/W)	105
Colour temperature (K)	4000
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	578
Emergency duration (h)	3

Electrical data

Total power consumption (W)	57
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Inrush Current (A)	33
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	28

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000

RANA LED Recessed 1200

RANA LED R 1200 HO 4K LOUV+PRIM W GEN2

0052441

Lifespan L90 B10

50000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Weight (kg)	4.6
Recessed Depth (mm)	120



Packaging

Single packaging type	Carton
Product EAN number	5410288524412
Packaging single length / height (cm)	124.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
Units per outer package	1
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0


Safety data

Optimal operating condition (°C)	5-25
----------------------------------	------

PHOTOMETRY

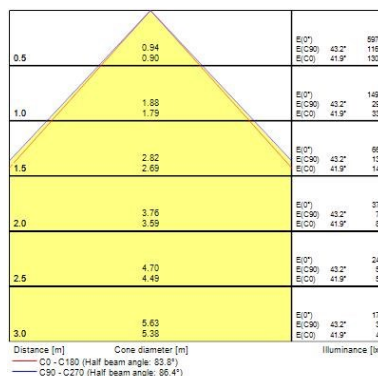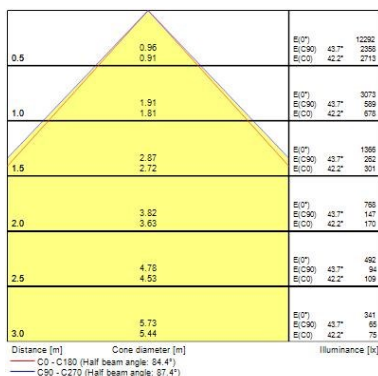

RANA LED Recessed 1200
RANA LED R 1200 HO 4K LOUV+PRI EM W GEN2
0052441

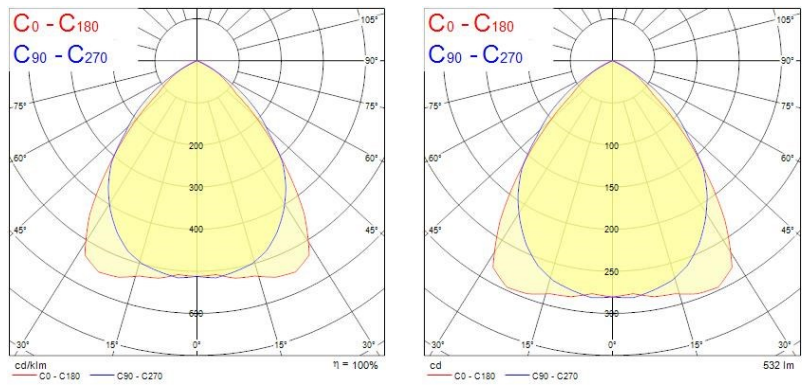

TECHNICAL DRAWINGS

