

## Giotto LED 305


### GIOTTO 305 3000K SURFACE EMERGENCY

#### 3034785



#### Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1490 lm, 20W, 75lm/W, 3000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 50,000 hours lumen maintenance. Drive current: 700mA, IP44, IK10, Class I, 220-240V.

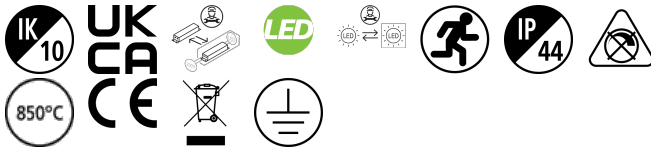

#### PRODUCT OVERVIEW

Product name	GIOTTO 305 3000K SURFACE EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	1490
Luminous flux (lm)	1490
Luminaire efficacy (lm/W)	75
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 24
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	102
Total power consumption (W)	20
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971347859

## Giotto LED 305

### GIOTTO 305 3000K SURFACE EMERGENCY

### 3034785

#### DATA TABLE

##### General data

Product name	GIOTTO 305 3000K SURFACE EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	1°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

##### Optical data

Fixture luminous flux (lm)	1490
Luminous flux (lm)	1490
Luminaire efficacy (lm/W)	75
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	120
Glare control	< 24
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80
Luminous flux (emergency) (lm)	102
Emergency duration (h)	3

##### Electrical data

Total power consumption (W)	20
Mains voltage (V)	220-240V~
Lamp power factor	1
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
Drive current (mA)	600
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D

## Giotto LED 305

### GIOTTO 305 3000K SURFACE EMERGENCY

### 3034785

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	52
Max. Luminaires per 16A C Breaker	85
Max. Luminaires per 20A C Breaker	104
Max. Luminaires per 10A B Breaker	31
Max. Luminaires per 16A B Breaker	50
Max. Luminaires per 20A B Breaker	62

#### Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	40000
Lifespan L90 B10	32000

#### Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	104
Nominal Product Diameter (mm)	305
Weight (kg)	1.41

#### Packaging


Single packaging type	Carton
Product EAN number	8711971347859
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	10.0
DUN14 (outer)	08711971347859
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	10.0

#### Safety data

Optimal operating condition (°C)	1-25
----------------------------------	------

## PHOTOMETRY

## Giotto LED 305 GIOTTO 305 3000K SURFACE EMERGENCY 3034785

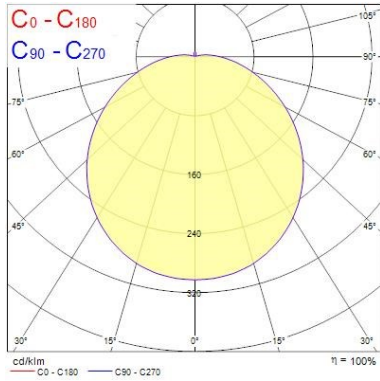

0.5	1.58	E(0°) E(C0)	2010 155
1.0	3.15	E(0°) E(C0)	502 39
1.5	4.73	E(0°) E(C0)	233 17
2.0	6.30	E(0°) E(C0)	126 10
2.5	7.88	E(0°) E(C0)	80 6
3.0	9.45	E(0°) E(C0)	56 4

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 115.2°)

### TECHNICAL DRAWINGS

