Equinox *EQUINOX 165 2500 940 DALI* **2059949**

Product features



Equinox is an elegant and innovative luminaire designed using the latest optical technology. It is a high
quality and efficient lighting solution for office, hospitality, and retail environments. It creates
inspirational halo effects regulated by a unique adjustable optic system. It is DALI dimmable downlight
luminaire, Colour rendering index Ra >90, Colour temperature: 4000K Neutral White, Class II, Cut out
dimensions: 165mm. Low Glare UGR<19.


















PRODUCT OVERVIEW

Product name	EQUINOX 165 2500 940 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	64
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	Yes
Dimming method	DALI, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768599493

Equinox *EQUINOX 165 2500 940 DALI* **2059949**

PHOTOMETRY

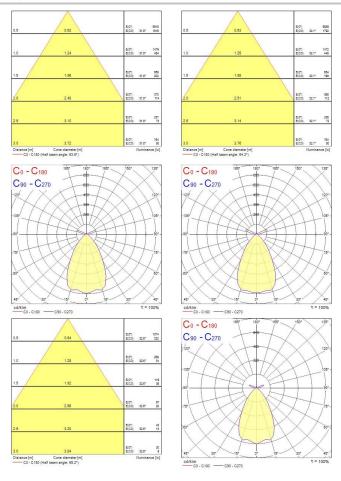

TECHNICAL DRAWINGS

