

Giotto LED 305


GIOTTO 305 4000K RECESSED DALI EMERGENCY

3034790



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 16W, 109lm/W, 4000K, CRI 80, DALI, integral 3 hour maintained emergency, 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

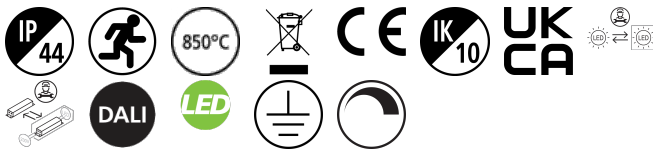


PRODUCT OVERVIEW

Product name	GIOTTO 305 4000K RECESSED DALI EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	1750
Luminous flux (lm)	1750
Luminaire efficacy (lm/W)	109
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 24
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	138
Luminous flux (emergency) (lm)	138
Total power consumption (W)	20
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10

Giotto LED 305
GIOTTO 305 4000K RECESSED DALI EMERGENCY
3034790

Product EAN number 8711971347903

PHOTOMETRY

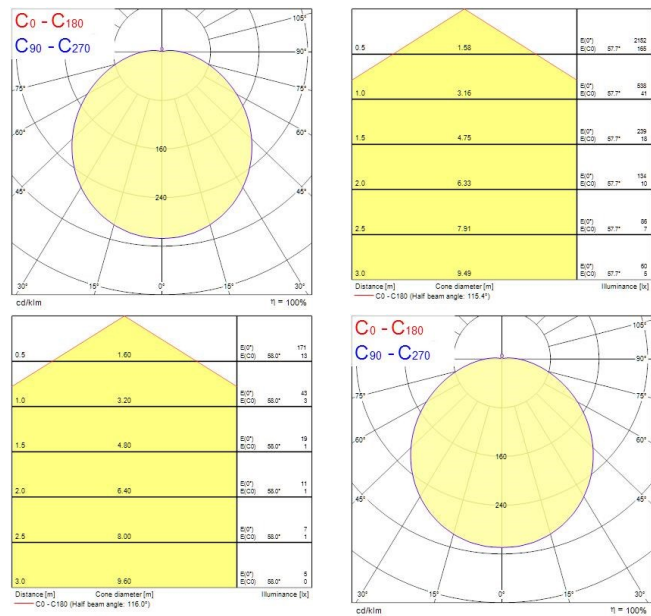

TECHNICAL DRAWINGS

