



Features

• 2059067 BEACON WW LED O/B DIM 3K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for museum, gallery and display applications, die-cast aluminium body, passive cooling heatsink, uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread, beam angle: asymmetric wallwash, optics: asymmetric glass lens, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 3823lm, luminaire efficacy: 80lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 50,000 hours at 70% of the original output (L70), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, dimmable, on-board potentiometer for dimming control, power factor: 0.98, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environm...


Product Overview

Product name	BEACON WW LED O/B DIM 3K L3 BLK
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4276804
Fixture luminous flux (lm)	3823
Luminaire efficacy (lm/W)	80
LOR (%)	100
Colour temperature (K)	3000

BEACON WW LED O/B DIM 3K L3 BLK 2059067

Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	48
Product Voltage (V)	240
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Black
IP rating	IP20
Product EAN number	5025768590674
Warranty	5 years
Dimming method	Mains: leading / trailing edge

Photometry

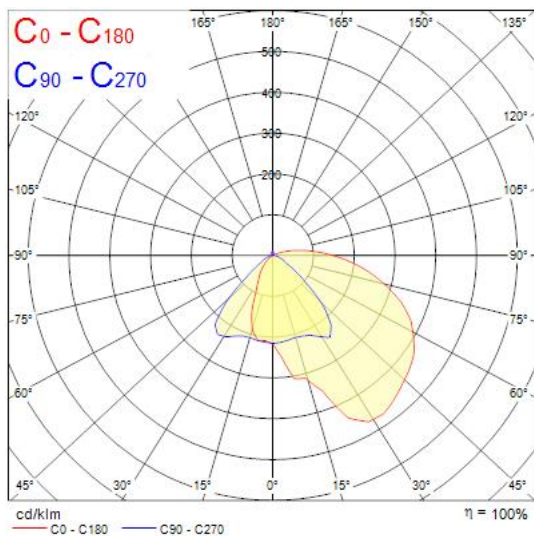

Technical drawings

