

OPTIX RECESSED 4 CELLS 4000K ALU 2021692



Features

- OPTIX RECESSED 4 CELLS 4000K ALU is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 310x100 mm. Aluminised plastic extra low glare optics. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 1010lm. Power consumption 9W. Luminaire efficacy 112lm/W. 42,000hrs L90B10 lifespan. UGR<18, Luminance at 65°<3000 Cd/m², IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.


Product Overview

Product name	OPTIX RECESSED 4 CELLS 4000K ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	1010
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 18
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class I
Control gear type	LED driver constant current

OPTIX RECESSED 4 CELLS 4000K ALU 2021692

Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216925
Warranty	5 years
Dimming method	N/A

Photometry

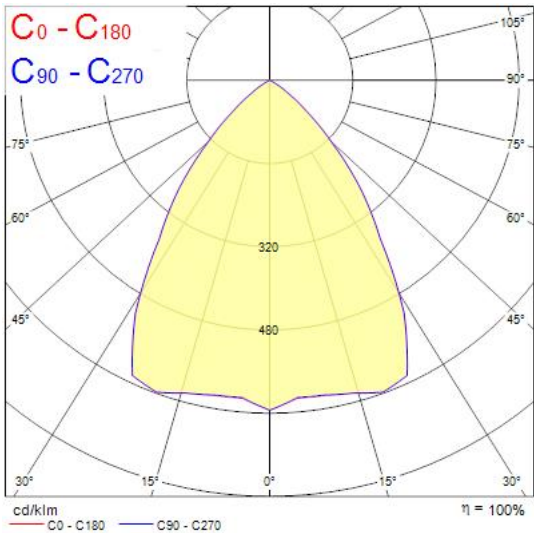

Technical drawings

