



## Features

- Back lit LED panel, Low Flicker, 36 W, Warm White, 3000 K, 3200 lumens, 89 lm/W, Average lifespan: 100.000Hrs, electronic non dimmable driver. (HxWxD) 34 x 595 x 595 mm.


## Product Overview

Product name	START eco Panel 600x600 3200Lm 830
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	112
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No


## START eco Panel 600x600 3200Lm 830 0047669

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Product EAN number	5410288476698
Warranty	3 years
Dimming method	N/A

### Photometry

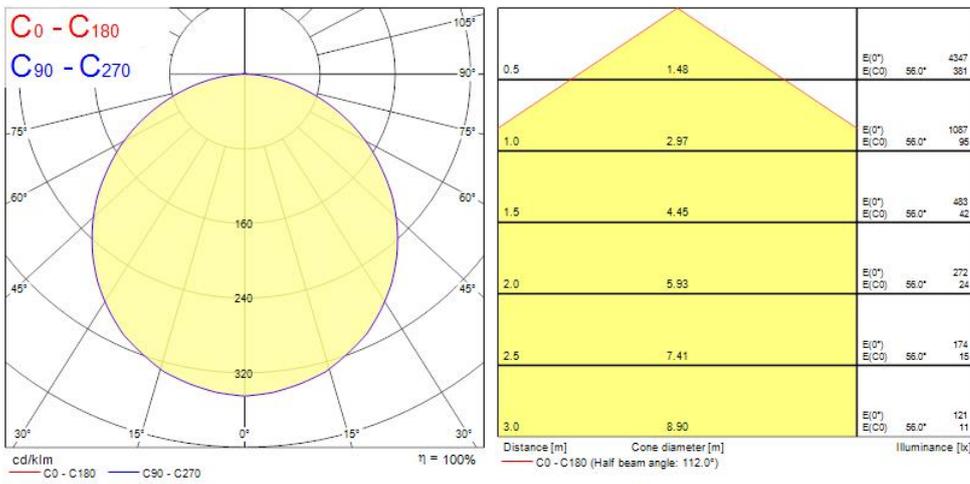

### Technical drawings

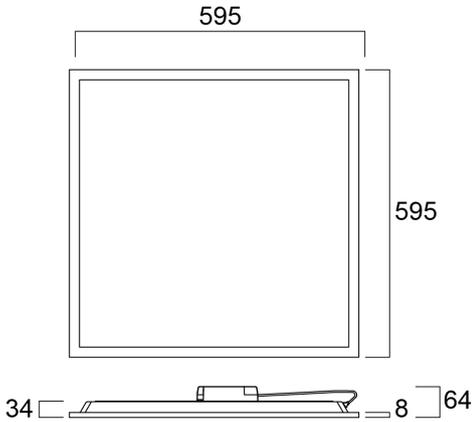

### Data table

#### GENERAL DATA

Product name	START eco Panel 600x600 3200Lm 830
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	3 years

#### OPTICAL DATA

Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	3000

## START eco Panel 600x600 3200Lm 830 0047669

Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	112
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	750
Inrush Current (A)	14.6
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	45
Max. Luminaires per 13A C Breaker	60
Max. Luminaires per 16A C Breaker	74
Max. Luminaires per 20A C Breaker	93

### LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

## START eco Panel 600x600 3200Lm 830 0047669

Lifespan L80 B20	71000
------------------	-------

### PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	34
Weight (kg)	1.538

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288476698
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.8
Packaging single depth (cm)	64.5
DUN14 (outer)	15410288476695
Units per outer package	4
Packaging outer length / height (cm)	69.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	65.0

### SAFETY DATA

Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No